solo® by AL-KO

GARDEN AND FORESTRY EQUIPMENT 2026







MADE FOR YOUR GARDEN



WHICH RANGE IS RIGHT FOR ME?

The right tools for every gardener. Choose which requirements and features are most important in your products. We differentiate here between EASY pro, COMFORT pro and PREMIUM pro to make comparison easier.





CONTENTS

FOREWORD	**3**
BATTERY TECHNOLOGY	**6**
LAWNCARE	
Robolinho® robotic lawnmowers	**14**
Lawnmowers	**24**
Hand lawnmower	**40**
Mulch mowers	**42**
Ride-on lawnmowers	**44**
Zero Turn	**48**
Tractors	**50**
Scarifiers	**78**
GARDENING	
Brushcutters & trimmers	**82**
Multi-tools	**90**
Scythe mower	**94**
Combi-Tool	**96**
Cultivator	**98**
Leaf blowers & leaf vacuums	**100**
Blade shredders	**104**
Hedge trimmers	**106**
FORESTRY EQUIPMENT	
Chainsaws	**112**
WINTER EQUIPMENT	
Snow blowers	**122**
FOR KIDS	**126**
SPARE PARTS	**127**
TECHNICAL DATA	**128**

EASY *pro*

The solo® by AL-KO power supply solution for medium-sized to large gardens – because when there's much to be done, the ease of use, versatility and clever features that make your work easier are what really count. With our EASY pro machines you are always ready to make your garden the most stunning in the neighbourhood.

- **MEDIUM-SIZED TO LARGE GARDENS**
- **FAST, EASY TO USE**
- **ADDED FEATURES**
- **DURABLE APPLIANCES FOR GARDENING ENTHUSIASTS**



COMFORT *pro*

Comfort ensured thanks to optimised functionality and professional equipment with innovative features – that's what our COMFORT pro range can offer you. What's more, our products' ideal performance and proven durability ensure fast and impressive results.

- **LARGE GARDENS AND GREEN SPACES**
- **HIGH LEVEL OF DURABILITY AND USER FRIENDLINESS**
- **LOTS OF INNOVATIVE FEATURES**
- **INNOVATIVE PRODUCTS FOR THE HIGHEST STANDARDS**



PREMIUM *pro*

With the PREMIUM pro rating, you get only the best of the best from the solo® by AL-KO brand. Thanks to optimum comfort and user friendliness, our PREMIUM pro devices are suitable for demanding applications several times a week.

- **LARGE GARDENS, GREEN SPACES AND GARDEN LANDSCAPES**
- **HIGH PRECISION AND TECHNICAL SAFETY**
- **INNOVATIVE AND SMART FEATURES**
- **DURABLE APPLIANCES FOR PROFESSIONAL STANDARDS**



OUR HISTORY
QUALITY SINCE 1931



solo® by AL-KO

AL-KO Gardentech is one of the global players of German SMEs. The modern yet long-established company, headquartered in Kötz near Augsburg, employs around 700 people and operates in more than 17 locations worldwide. In 2024, the company generated a turnover of around 250 million euros.

Since producing our first lawnmower in 1966, we have grown into a leading garden technology brand. Our products have always been manufactured with a high degree of care, creativity and technical perfection. The brand promise “QUALITY FOR LIFE” continues to stand for AL-KO's unique product and service quality.

More at **www.alko-garden.com**



Member of DAYE

AL-KO Gardentech has been part of Ningbo Daye Garden Machinery Co. Ltd. since 2025 – a leading international company in the gardening industry. As a publicly traded global player and China’s number one in the development, manufacture and distribution of innovative lawnmowers, DAYE stands for the highest quality, state-of-the-art technology, and a genuine passion for gardening.

More than 1,200 employees work day in, day out, at the headquarters in Yuyao, China, to create leading solutions for perfect green spaces. With a total of 24 locations in 20 countries, the DAYE Group has a global presence, combining international strength with regional proximity – for boundless gardening enjoyment.

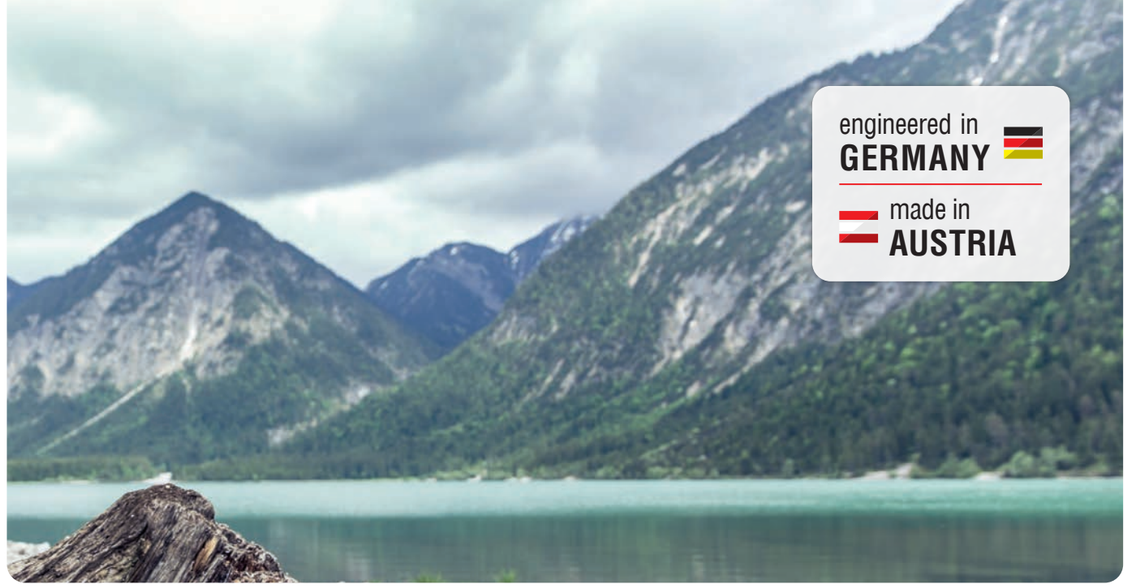

ENGINEERED IN GERMANY MADE IN AUSTRIA

QUALITY FOR LIFE AL-KO appliances are developed with precision in Kötz, in the Swabian region of Bavaria, and subjected to rigorous testing. Since 1966, most of our gardening tools have been manufactured in the tranquil town of Obdach in the Austrian province of Styria. With the flexibility and security of an owner-managed company, our goal is to meet the requirements of our customers every time. With typical German efficiency, our research and development engineers create pioneering garden tools from hundreds of individual parts.

HIGHEST STANDARDS Materials of the highest quality, ingenious technology, perfect ergonomics and a sure feel for form and detail are the unmistakable hallmarks of our garden tools. The rigorous quality requirement that characterises the AL-KO brand is guaranteed through our comprehensive range of technologies that is consistently designed and implemented by AL-KO development engineers, designers and technicians – from the initial design and prototype construction right through to the end product. Here, we are placing particular emphasis on digital solutions, in order to intelligently connect a wide range of processes.



WE FOCUS ON THE USER

- Ease of use
- Customer satisfaction
- Solution-based

WE ARE A STRONG PARTNER

- Durable
- Professional
- Trustworthy

WE ARE ALWAYS ONE STEP AHEAD

- Smartness
- Innovative technology
- Continuous progress

BATTERY TECHNOLOGY

One battery for all demanding tasks: whether hedge cutting, lawn trimming, wood splitting, tree pruning or lawn mowing – our powerful AL-KO lithium-ion battery with 36 V / 2.5 Ah, 4.0 Ah, 5.0 Ah or 8.0 Ah powers every solo® by AL-KO cordless garden tool to a standard that's a cut above the rest.

AL-KO 36 V

STARTER SET

Battery (4.0 Ah) **+ charger** (3 A)

EAN no. 400 371 806 0973

Art. no. 113 803



Once the new 5 Ah Bluetooth battery (art. no. 114 161) is inserted into the smart garden tool, it automatically exchanges data with the tool. The garden tool transmits relevant operating information to the battery, including current and past error codes. The smart battery then sends this data via Bluetooth to both our AL-KO inTOUCH® app and the service dashboard. This innovative system makes troubleshooting much easier for our service departments and also provides end customers with a comprehensive insight into their tool's performance and operating data.

SMART DIAGNOSIS



BATTERY B 800 Li Bluetooth®
Li-ion 36 V 8,0 Ah, Bluetooth® connectivity
EAN no. 400 371 806 3950
Art. no. 114 017



NEW

BATTERY B 200.5 Li Bluetooth®
Li-ion 36 V 5.0 Ah, Bluetooth® connectivity
EAN no. 400 371 806 6821
Art. no. 114 161



BATTERY B 160 Li Bluetooth®
Li-ion 36 V 4,0 Ah, Bluetooth® connectivity
EAN no. 400 371 806 5978
Art. no. 114 099



BATTERY B 110 Li
Li-ion 36 V 2.5 Ah
EAN no. 400 371 806 4650
Art. no. 114 046



NEW

FAST CHARGER FC 1200 Li
Li-ion 36 V
EAN no. 400 371 806 6838
Art. no. 114 162



DUAL CHARGER C 200 Li
Li-ion 36 V 2x 3.0A
WiFi-connectivity
EAN no. 400 371 806 3967
Art. no. 114 018



CHARGER C 130 Li
Li-ion 36 V 3.0 A
EAN no. 400 371 805 5290
Art. no. 113 281



BATTERY BELT BB 40
AL-KO 36 V Belt
EAN no. 400 371 806 0713
Art. no. 127 573



AL-KO 36 V ADAPTER
For the AL-KO 36 V Belt BB 40
EAN no. 400 371 806 0799
Art. no. 127 579

AL-KO 36 V

BATTERY TRACTORS





R 74.5 Li 36 V

Working width / mowing radius		74 cm / 85 cm
Area coverage*		4,500 m²
WITHOUT BATTERIES, INCL. CHARGER 8 A	**EAN no.**	400 371 806 5947
	Art. no.	**127 776**
SET INCL. 4X BATTERY 8 AH + CHARGER 8A	**EAN no.**	400 371 806 6098
	Art. no.	**127 783**

FURTHER INFORMATION CAN BE FOUND ON PAGE 45.



		GT 3635 L	BC 3640 L	BC 4235.2 B	BC 3640 B
Working width blade / nylon line		– / 35 cm	25 cm / 41 cm	25.5 cm / 36 cm	25 cm / 41 cm
WITHOUT BATTERY OR CHARGER	**EAN no.**	400 371 806 6845	400 371 806 6852	400 371 806 3097	400 371 806 6869
	Art. no.	**127 822**	**127 823**	**127 644**	**127 824**
SET INCL. 1 x BATTERY 4 Ah + CHARGER 3 A	**EAN no.**	400 371 806 7767	400 371 806 7774	400 371 806 6203	400 371 806 7781
	Art. no.	**127 826**	**127 827**	**127 796**	**127 828**

FURTHER INFORMATION CAN BE FOUND ON PAGES 84–85.

*Area coverage depends on the battery selection.

AL-KO 36 V







	3833 Li P	4232 Li P	4232 Li SP
Cutting width	37 cm	42 cm	42 cm
For lawns up to*	650 m²	650–1,300 m²	650–1,300 m²
Cutting height / height adjustment	25–75 mm / central	30–75 mm / central	30–75 mm / central
WITHOUT BATTERY OR CHARGER – **EAN no.**	400 371 806 4353	400 371 806 1437	400 371 806 3363
WITHOUT BATTERY OR CHARGER – **Art. no.**	**127 701**	**127 597**	**127 661**
SET INCL. BATTERY + CHARGER 3 A – **EAN no.**	400 371 806 6210	400 371 806 6289	400 371 806 6296
SET INCL. BATTERY + CHARGER 3 A – **Art. no.**	**127 784** (set with 4 Ah battery)	**127 785** (set with 4 Ah battery)	**127 786** (set with 2.5+ 4 Ah battery)
SET INCL. 2 BATTERIES (4 Ah + 8 Ah) + CHARGER 3 A – **EAN no.**	–	–	–
SET INCL. 2 BATTERIES (4 Ah + 8 Ah) + CHARGER 3 A – **Art. no.**	–	–	–

FURTHER INFORMATION CAN BE FOUND ON PAGES 24–29.









	4732 Li SP	4735 Li VS	4772 Li VS-W	5272 Li VS-W
	46 cm	46 cm	46 cm	51 cm
	650–1,300 m²	650–1,300 m²	650–1,300 m²	650–1,300 m²
	30–80 mm / central	30–80 mm / central	30–80 mm / central	30–80 mm / central
EAN no.	400 371 806 1444	127 798 / 400 371 806 6265	127 599 / 400 371 806 1451	127 600 / 400 371 806 1468
Art. no.	**127 598**	**127 798**	**127 599**	**127 600**
EAN no.	400 371 806 6302	400 371 806 7408	–	–
Art. no.	**127 787** (set with 8 Ah battery)	**127 834** (set with 8 Ah battery)	–	–
EAN no.	–	–	400 371 806 6319	400 371 806 6326
Art. no.	–	–	**127 789**	**127 790**

*Area coverage depends on the battery selection.

	4736 Li VS
Working width	46 cm
For lawns up to*	400–800 m²
Cutting height / height adjustment	30–85 mm / wheel axle, 4-stage
WITHOUT BATTERY OR CHARGER – **EAN no.**	400 371 806 5329
WITHOUT BATTERY OR CHARGER – **Art. no.**	**127 723**
SET INCL. 1 BATTERY (8 AH) + CHARGER 3 A – **EAN no.**	400 371 806 7798
SET INCL. 1 BATTERY (8 AH) + CHARGER 3 A – **Art. no.**	**127 844**

FURTHER INFORMATION CAN BE FOUND ON PAGES 42–43.





	3856 Li
Working width	38 cm
Working depth	+6 to -14 mm
Blade shaft	14 steel blades
WITHOUT BATTERY OR CHARGER – **EAN no.**	400 371 806 6876
WITHOUT BATTERY OR CHARGER – **Art. no.**	**127 825**
SET INCL. 1 BATTERY (4 Ah) + CHARGER 3 A – **EAN no.**	400 371 806 7866
SET INCL. 1 BATTERY (4 Ah) + CHARGER 3 A – **Art. no.**	**127 852**

FURTHER INFORMATION CAN BE FOUND ON PAGE 80.





AL-KO 36 V





		LB 4250	LBV 3690
Air speed		250 km/h	260 km/h
WITHOUT BATTERY OR CHARGER	EAN no.	400 371 805 9694	400 371 806 4698
	Art. no.	127 507	127 735
SET INCL. BATTERY AND CHARGER	Included in delivery	1x battery 36 V (4 Ah) 1x charger (3A) 1x battery belt BB 40	1x battery 36 V (4 Ah) 1x charger (3 A)
	EAN no.	400 371 806 1307	400 371 806 6197
	Art. no.	127 591	127 795

FURTHER INFORMATION CAN BE FOUND ON PAGES 100–101.





		CS 4235	CS 4235	CS 4235
Bar length		25 cm / 10"	30 cm/12"	35 cm/14"
WITHOUT BATTERY OR CHARGER	EAN no.	400 371 806 0256	400 371 806 0263	400 371 806 0270
	Art. no.	127 551	127 552	127 553
SET INCL. BATTERY AND CHARGER	Included in delivery	1x battery 36 V (4 Ah) 1x charger (3A) 1x battery belt BB 40	1x battery 36 V (4 Ah) 1x charger (3A) 1x battery belt BB 40	1x battery 36 V (4 Ah) 1x charger (3A) 1x battery belt BB 40
	EAN no.	400 371 806 1321	400 371 806 1338	400 371 806 1345
	Art. no.	127 593	127 594	127 595

FURTHER INFORMATION CAN BE FOUND ON PAGES 112–115.



		HT 4245	HT 3645	HT 3660
Blade length		450 mm	450 mm	600 mm
Tooth gap		28 mm	36 mm	36 mm
WITHOUT BATTERY OR CHARGER	EAN no.	400 371 805 9724	400 371 806 5053	400 371 806 4681
	Art. no.	127 510	127 741	127 734
SET INCL. BATTERY AND CHARGER	Included in delivery	1x battery 36 V (4 Ah) 1x charger (3A) 1x battery belt BB 40	1x battery 36 V (4 Ah) 1x charger (3 A)	1x battery 36 V (4 Ah) 1x charger (3 A)
	EAN no.	400 371 806 1314	400 371 806 6135	400 371 806 6142
	Art. no.	127 592	127 791	127 792

FURTHER INFORMATION CAN BE FOUND ON PAGES 108–109.



		MT 42.2
Length		95 cm
WITHOUT BATTERY OR CHARGER	EAN no.	400 371 806 3011
	Art. no.	127 633
SET INCL. BATTERY AND CHARGER	Included in delivery	1x battery 36 V (4 Ah) 1x charger (3 A) 1x CSA 4220.2 1x HTA 4245.2
	EAN no.	400 371 806 6241
	Art. no.	127 797

FURTHER INFORMATION CAN BE FOUND ON PAGES 90–91.



	ATTACHMENT HTA 4245.2
Bar length	45 cm
EAN no.	400 371 806 3110
Art. no.	127 646



	ATTACHMENT CSA 4220.2
Bar length	25 cm / 10"
EAN no.	400 371 806 3080
Art. no.	127 643




		CS 3635	CS 3640
		35 cm / 14"	40 cm / 16"
		400 371 806 4674	400 371 806 5091
		127 733	127 745
		1x battery 36 V (4 Ah) 1x charger (3A)	1x battery 36 V (4 Ah) 1x charger (3A)
		400 371 806 6159	400 371 806 6166
		127 793	127 794

FURTHER INFORMATION CAN BE FOUND ON PAGES 112–115.



	ATTACHMENT BCA 4235.2
Working width Ø blade / line	25.5 cm / 36 cm
EAN no.	400 371 806 3073
Art. no.	127 642

AL-KO 36 V

OPERATING TIMES



Applications	Name	Art. no.	Category	1x battery B 800 Li BT (8 Ah)	2x battery B 800 Li BT (8 Ah)	1x battery B 200.5 Li BT (5 Ah)	2x battery B 200.5 Li BT (5 Ah)	1x battery B 160 Li BT (4 Ah)	2x battery B 160 Li BT (4 Ah)	1x battery B 110 Li (2.5 Ah)	2x battery B 110 Li (2.5 Ah)
LAWN MOWER / MULCHING MOWER / SCARIFIER											
Mowing	3833 Li P	127 701	EASY pro	55 min.	–	45 min.	–	35 min.	–	20 min.	–
Mowing	4232 Li P	127 597	COMFORT pro	55 min.	110 min.	45 min.	90 min.	35 min.	70 min.	20 min.	40 min.
Mowing	4232 Li SP	127 661	COMFORT pro	55 min.	110 min.	45 min.	90 min.	35 min.	70 min.	20 min.	40 min.
Mowing	4732 Li SP	127 598	COMFORT pro	55 min.	110 min.	45 min.	90 min.	35 min.	70 min.	20 min.	40 min.
Mowing	4735 Li VS	127 798	COMFORT pro	55 min.	110 min.	45 min.	90 min.	35 min.	70 min.	20 min.	40 min.
Mowing	4772 Li VS-W	127 599	PREMIUM pro	55 min.	110 min.	45 min.	90 min.	35 min.	70 min.	20 min.	40 min.
Mowing	5272 Li VS-W	127 600	PREMIUM pro	55 min.	110 min.	45 min.	90 min.	35 min.	70 min.	15 min.	30 min.
Mulching	4736 Li VS	127 723	COMFORT pro	45 min.	90 min.	35 min.	70 min.	25 min.	50 min.	15 min.	30 min.
Scarifying	3856 Li	127 825	COMFORT pro	40 min.	80 min.	30 min.	60 min.	20 min.	40 min.	12 min.	24 min.
Applications	**Name**	**Art. no.**	**Category**	**6x battery B 800 Li BT (8 Ah)**		**6x battery B 200 Li BT (5 Ah)**		**6x battery B 160 Li BT (4 Ah)**		**6x battery B 110 Li (2.5 Ah)**	
RIDE-ON LAWNMOWERS											
Mowing	R 74.5 Li 36 V	127 776	PREMIUM pro	60 min.		30 min.		20 min.		20 min.	
Applications	**Name**	**Art. no.**	**Category**	**1x battery B 800 Li BT (8 Ah)**		**1x battery B 200 Li BT (5 Ah)**		**1x battery B 160 Li BT (4 Ah)**		**1x battery B 110 Li (2.5 Ah)**	
BRUSHCUTTERS											
Trimming	GT 3635 L	127 822	COMFORT pro	108 min.		80 min.		60 min.		40 min.	
Trimming	BC 4235.2 B	127 644	COMFORT pro	108 min.		80 min.		60 min.		40 min.	
Trimming	BC 3640 L	127 823	PREMIUM pro	108 min.		80 min.		60 min.		40 min.	
Trimming	BC 3640 B	127 824	PREMIUM pro	108 min.		80 min.		60 min.		40 min.	
MULTI-TOOL											
Trimming and cutting	MT 42.2 with BCA 4235.2	127 642	PREMIUM pro	90 min.		63 min.		50 min.		31 min.	
Trim hedges	MT 42.2 with HTA 4245.2	127 646	PREMIUM pro	144 min.		100 min.		80 min.		50 min.	
Saw trees	MT 42.2 with CSA 4220.2	127 643	PREMIUM pro	126 cuts (square timber 10x10 cm)		90 cuts (square timber 10x10 cm)		70 cuts (square timber 10x10 cm)		45 cuts (square timber 10x10 cm)	
LEAF BLOWERS AND LEAF VACUUMS											
Blowing	LB 4250	127 507	PREMIUM pro	45 min.		30 min.		25 min.		15 min.	
Blowing	LBV 3690	127 735	PREMIUM pro	Upon request		Upon request		Upon request		Upon request	
HEDGE TRIMMERS											
Hedge trimming	HT 4260	127 440	PREMIUM pro	162 min.		110 min.		90 min.		55 min.	
Hedge trimming	HT 3645	127 741	PREMIUM pro	158 min.		106 min.		86 min.		51 min.	
Hedge trimming	HT 3660	127 734	PREMIUM pro	162 min.		110 min.		90 min.		55 min.	
CHAINSAWS											
Sawing logs	CS 4235	127 551	PREMIUM pro	162 cuts (square timber 10x10 cm)		112 cuts (square timber 10x10 cm)		90 cuts (square timber 10x10 cm)		56 cuts (square timber 10x10 cm)	
Sawing logs	CS 4235	127 552	PREMIUM pro	162 cuts (square timber 10x10 cm)		112 cuts (square timber 10x10 cm)		90 cuts (square timber 10x10 cm)		56 cuts (square timber 10x10 cm)	
Sawing logs	CS 4235	127 553	PREMIUM pro	162 cuts (square timber 10x10 cm)		112 cuts (square timber 10x10 cm)		90 cuts (square timber 10x10 cm)		56 cuts (square timber 10x10 cm)	
Sawing logs	CS 3635	127 733	PREMIUM pro	162 cuts (square timber 10x10 cm)		112 cuts (square timber 10x10 cm)		90 cuts (square timber 10x10 cm)		56 cuts (square timber 10x10 cm)	
Sawing logs	CS 3640	127 745	PREMIUM pro	162 cuts (square timber 10x10 cm)		112 cuts (square timber 10x10 cm)		90 cuts (square timber 10x10 cm)		56 cuts (square timber 10x10 cm)	

The specified battery operating times are based on the maximum working time including work performed and basic maintenance work, which is required for general use. The values are guidelines, which may vary based on use and material cut.

CHARGING TIMES



max.12.0 A*
FAST CHARGER FC 1200 Li
Art. no. 114 162



2x 3.0A
DOUBLE BATTERY CHARGER C 200 Li
Art. no. 114 018



3.0A
CHARGER C 130 Li
Art. no. 113 281

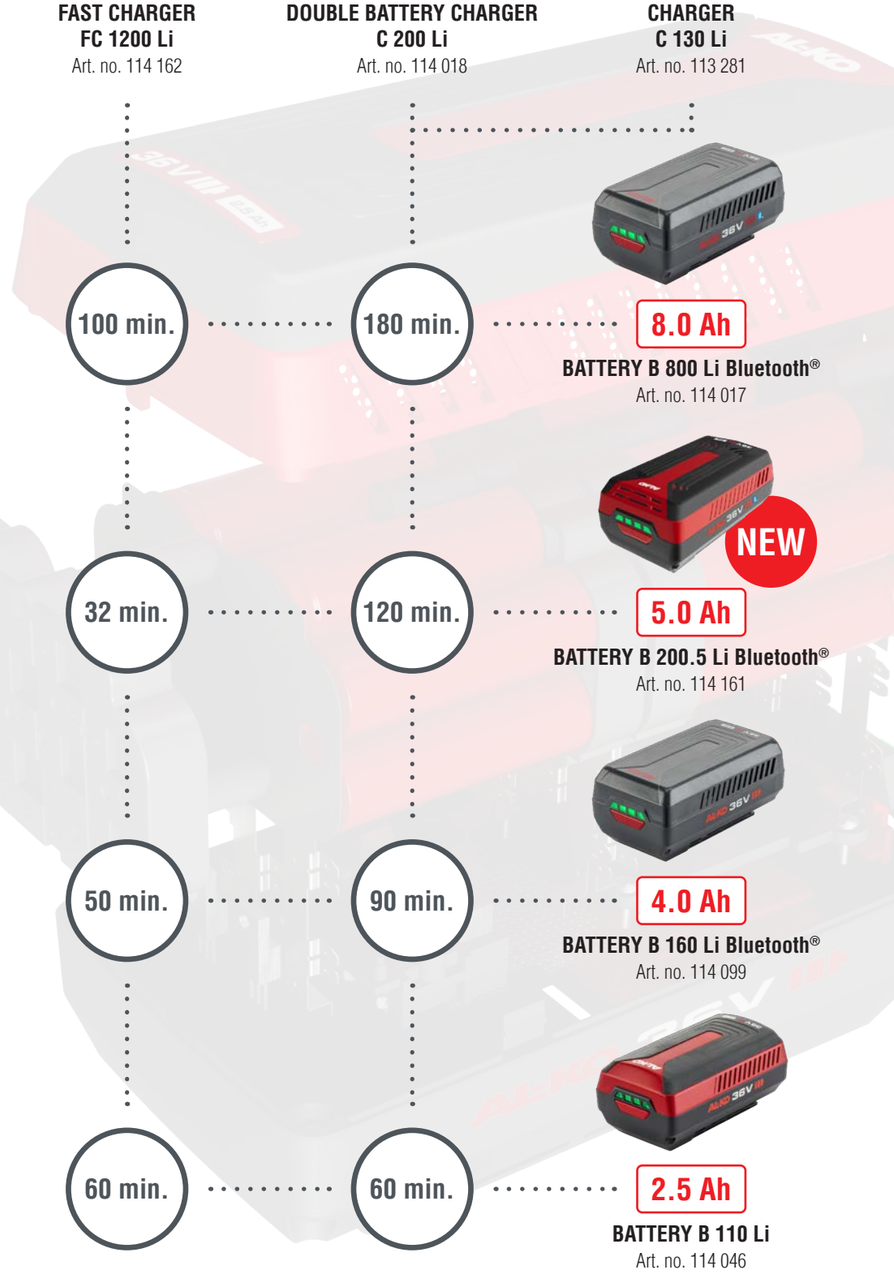

ROBOLINHO®

ROBOTIC LAWNMOWERS



MAKES LIGHT WORK OF MANOEUVRING IN COMPLEX GARDENS

Its compact design and intelligent control are what make the **Robolinho®** stand out from the crowd. By mowing on a regular basis, the Robolinho® ensures that the lawn is always in tip-top shape. It can even get into narrow passages at least 60 cm wide with ease. The Robolinho® takes care of narrow patches of grass with its special passage mode, leaving you with an impressively cut lawn. As a result of the lateral charging contact, the lawn is protected in the area of the base station. When it comes to making your lawn care environmentally friendly, you can ideally use the Robolinho® during the day and thus protect nocturnal animals such as hedgehogs.

- MANAGES NARROW PASSAGES AS SMALL AS 60 CM
- ULTRA QUIET
- OVERCOMES GRADIENTS UP TO 45%
- SUPER-FINE SHREDDING OF GRASS CLIPPINGS
- SAFE IN ALL POSITIONS
- SMART APP CONTROL AND INTEGRATION INTO THE SMART HOME



SMART CONTROL

Our Robolinho® robotic lawnmowers work quietly, safely and gently. Connecting the lawnmower to a Smart Home or Smart Gardening system via AL-KO inTOUCH® App offers you further benefits. The smart connected Robolinho® robotic lawnmowers can be controlled and automated via IFTTT routines. Synchronise Robolinho® activities with any IFTTT service, e.g. with a weather channel (stop mowing during a storm) or with an irrigation service (stop mowing when the lawn is being watered). In many situations you may have your hands full or be pressed for time. Thankfully your diligent Robolinho® can be controlled easily by voice command via Amazon Alexa. Mow the lawn, take a break, drive to the base station and much more on demand. Use your free time to relax, catch up with family or devote your time to other tasks.

HIGH-PRECISION CUTTING AND EASY TO USE

The Robolinho® makes programming a piece of cake. Simply enter the desired days and times when it should maintain the lawn or specify when it should not mow and Robolinho® determines the ideal mowing times itself. The cutting height can be conveniently and easily set using a rotary dial. Thanks to its intelligent technology, the two hardened blades with additional mulching blades are rotated alternately in clockwise and anti-clockwise direction, which keeps them sharp for twice as long. This way, your lawn always stays perfectly cut and you can relax and enjoy the green haven. The Robolinho® makes light work of lawn care.

COMPREHENSIVE OPERATIONAL SAFETY AND QUIET OPERATION

Our Robolinho® has a sophisticated safety concept and five independent sensors for comprehensive operational safety. The Robolinho® ensures that it never leaves its working area. And best of all, its particularly low noise level guarantees disturbance-free operation.



STRONG TRACTION & EFFORTLESSLY OVERCOMES SLOPES

With wheels that offer impressive traction, the Robolinho® effortlessly ensures small turning radii and inclines of up to 24° / 45%. The generous ground clearance in the rear area ensures that the Robolinho® can also make light work of uneven terrain. No matter how demanding the terrain is, our Robolinho® effortlessly manages it and leaves behind a perfectly manicured lawn.



OUR SMART ROBOTIC LAWNMOWERS

GERMAN DESIGN AWARD WINNER 2024

engineered in GERMANY
made in AUSTRIA

The solo® by AL-KO Robolinho® range is elevated to a new level with our brand new options without boundary wires. The Robolinho® VISION uses camera technology to recognise boundaries and to detect and avoid objects. The Robolinho® RTK uses RTK GNSS technology for accurate positioning and virtual boundary definition, enabling even greater precision. All existing Robolinho® E and W models produced from 2017 onwards are "RTK-ready" and can be retrofitted with RTK technology.

GET CONNECTED WITH SMART CLOUD

More about smart gardening

Download AL-KO inTOUCH® App

works with Google Home ***

Works with IFTTT

API

intouch **

GET IT ON Google Play

Download on the App Store







	Robolinho® 520 W	Robolinho® 822 W	Robolinho® 1121 VISION
	EASY*pro*	COMFORT*pro*	COMFORT*pro*
Cutting width	20 cm	22 cm	21 cm
For lawns up to*	500 m²	800 m²	1,100 m²
Power	Li-ion 18 V / 2.2 Ah	Li-ion 20 V / 2.5 Ah	Li-ion 18 V / 36 V replaceable battery 5,0 Ah / 2.5 Ah
Brushless motor	✓	✓	✓
Mowing time / charging time	50 min. / 50 min.	60 min. / 50 min.	108 min. / 120 min.
Cutting height / height adjustment	25–55 mm / manual	25–55 mm / manual	30–60 mm / manual
Max. gradient	35%	45%	35%
Max. noise level	60 dB (A)	60 dB (A)	64 dB (A)
Entry points	3	3	Not required
Mowing strategy	Random cut	Random cut	Oriented, in paths
Boundary	Wires	Wires	Virtual, camera recognition
RTK technology	Retrofit kit optionally available	Retrofit kit optionally available	–
Wi-Fi + Smart Cloud Connect **	✓	✓	✓
Dual-bladed technology	✓	✓	✓
Rain sensor	✓	✓	✓
ECO mode	✓	✓	✓
Installation option for 2nd base station	✓	✓	–
Included in delivery	Base station	Base station	Base station
EAN no.	400 371 806 4261	400 371 806 4278	400 371 806 7477
Art. no.	**127 695**	**127 696**	**127 835**









	Robolinho® 1423 W	Robolinho® 1423 RTK	Robolinho® 2523 RTK	Robolinho® 5023 RTK
	COMFORT*pro*	PREMIUM*pro*	PREMIUM*pro*	PREMIUM*pro*
	23 cm	23 cm	23 cm	23 cm
	1,400 m²	1,400 m²	2,500 m²	5,000 m²
	Li-ion 25,2 V / 5,0 Ah	Li-ion 18 V / 2.2 Ah	Li-ion 20 V / 2.5 Ah	Li-ion 25,2 V / 5,0 Ah
	✓	✓	✓	✓
	140 min. / 90 min.	50 min. / 50 min.	60 min. / 50 min.	240 min. / 170 min.
	25–55 mm / manual	25–55 mm / manual	25–55 mm / manual	25–55 mm / manual
	45%	45%	45%	45%
	60 dB (A)	60 dB (A)	60 dB (A)	60 dB (A)
	6	Not required	Not required	Not required
	Random cut	Oriented, in paths	Oriented, in paths	Oriented, in paths
	Wires	Virtual, camera recognition by RTK	Virtual, camera recognition by RTK	Virtual, camera recognition by RTK
	Retrofit kit optionally available	✓	✓	✓
	✓	✓	✓	✓
	✓	✓	✓	✓
	✓	✓	✓	✓
	✓	✓	✓	✓
	✓	✓	✓	✓
	Base station	Base station, RTK reference station	Base station, RTK reference station	Base station, RTK reference station
	400 371 806 4285	400 371 806 7019	400 371 806 7026	400 371 806 7033
	127 697	**127 761**	**127 762**	**127 763**

* The maximum area may be reduced by the layout of the garden as well as the number and size of the obstacles.

** Incl. WiFi (2.4 GHz) connection with AL-KO inTOUCH® app (available for iOS and Android), Google Home, Alexa, IFTTT, Home Assistant, IoT API.

*** Google and Google Home are trademarks of Google LLC.

RTK

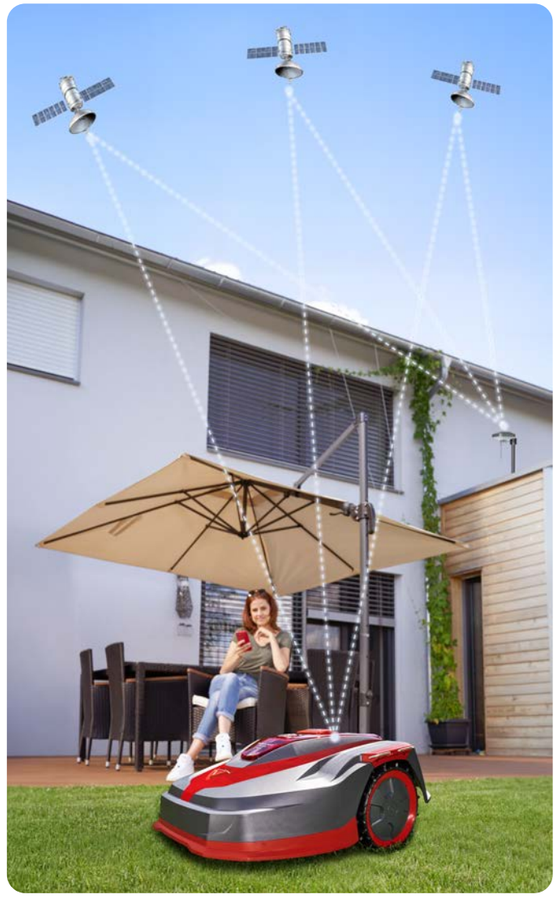

NEW

RTK TECHNOLOGY (REAL-TIME KINEMATIC)

Experience a revolutionary advance in lawn care with the Robolinho® RTK. By combining real-time kinematic positioning (RTK) with advanced sensor fusion, it offers unrivalled accuracy when navigating your lawn.

Equipped with triple GNSS band technology, the Robolinho® RTK also works smoothly in urban environments. The integration of a local RTK reference station ensures maximum precision by minimising atmospheric interference. Communication between the RTK reference station and the Robolinho® RTK takes place via LoRaWAN technology, which enables a range of up to two kilometres under optimum conditions. This ensures reliable and continuous connectivity and even lets you share your RTK reference station with nearby neighbours.

The Robolinho® RTK offers versatile boundary definitions and supports virtual, mixed virtual/wired or fully wired installations. This adaptability ensures a customised mowing experience.

With adjustable angles and track spacing, the Robolinho® RTK allows you to create fixed, random or chessboard-like mowing patterns.

Stay connected to the inTOUCH® app to monitor the position and progress of the Robolinho® RTK in real time. In the event of theft, its exact location can be tracked and reported.

Experience the future of lawn mowing with the Robolinho® RTK.





inTOUCH® APP

Furthermore, you can specify which area is to be mowed and when by managing the Robolinho®'s mowing schedule manually or by using the intelligent automatic mowing schedule. Configure precise Robolinho® RTK mowing patterns for each individual mowing activity, from fixed and adjustable angles to random and checkerboard patterns. Monitor its progress live via the app and track any errors on the map. Share the RTK reference station with your neighbours.

FLEXIBLE AND SMART MOWING

CHARGING STATION

The charging station can be placed anywhere on the property, both inside and outside the mowing area, as long as there is a passable path to the mowing area. The route to the charging station can be programmed.

NO-GO AREAS

You can define specific areas for the Robolinho® to avoid, ensuring it does not mow in those zones. (e.g. ponds, flower beds, etc.).

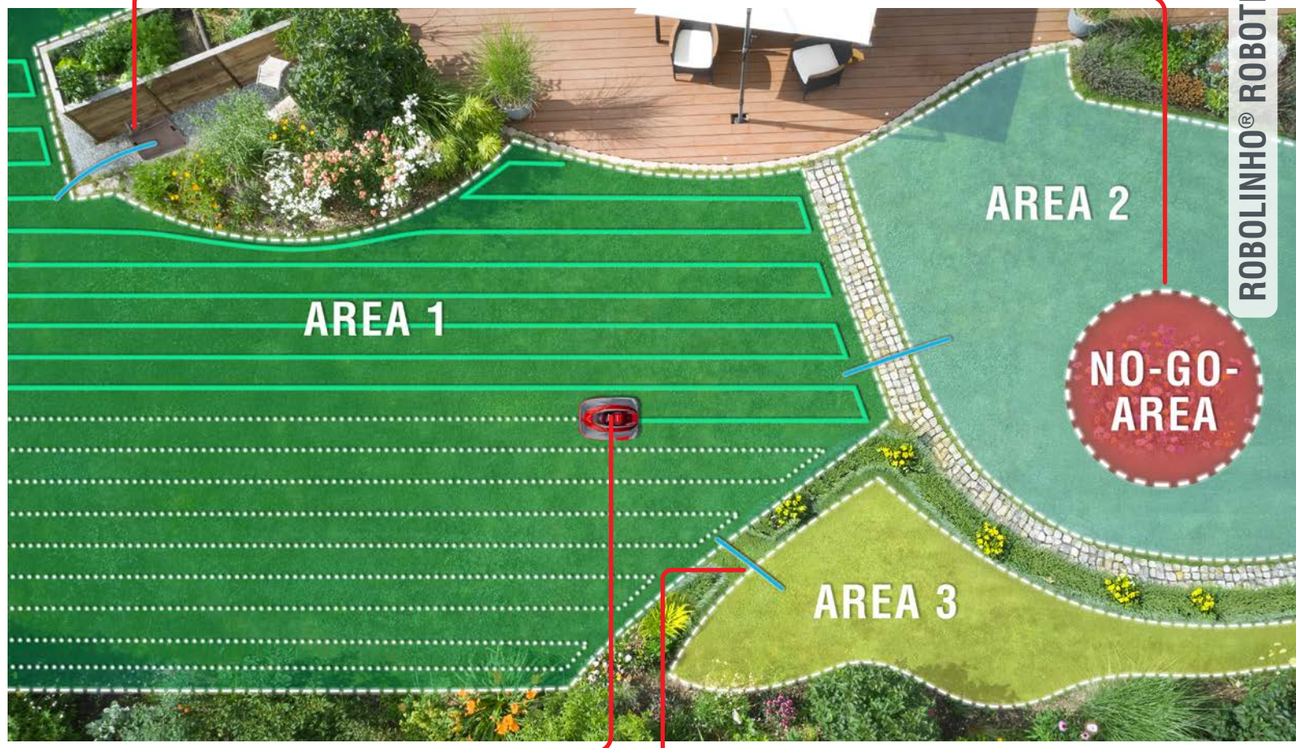

MOW THE WAY YOU WANT

The Robolinho® RTK can mow in stripes, improving the mowing coverage rate and saving time, thanks to its advanced algorithm technology. You can adjust the mowing angle. A chequerboard pattern is also possible. The distance between the paths can also be adjusted.

VIRTUAL BORDER

You can configure as many mowing areas as needed to cover the entire property. The mowing settings can be individually configured for each mowing area (e.g. mowing angle, mowing schedule, etc.). Paths between the mowing areas can also be configured.

HYBRID MODE



Only the RTK is needed to determine boundaries – no cable laying required.



Use the RTK and add cabling as a fallback in any small areas with strong GPS shadowing.



Keep your existing cable installation and use the RTK as well to mow in paths within your existing wires.

VISION

NEW



VISION TECHNOLOGY

Our innovative Robolinho® VISION robotic mower uses a state-of-the-art neural network with a full HD wide-angle camera to detect and interpret the environment and adapt the mowing behaviour accordingly.

Its camera automatically recognises lawn boundaries, making it ideal for gardens with clear boundaries such as lawn edges, walls and fences. To ensure privacy, the mower only takes pictures of the lawn area directly in front of the mower. It also processes image data locally and only uploads it to the AL-KO Smart Cloud based in the EU with explicit consent.

With LED lighting for difficult lighting conditions, simple non-invasive installation, camera-based navigation and object recognition, it is designed for smaller, visually well-defined lawns of up to 1,000 m².

It also has a replaceable AL-KO 18 V / 36 V (1 Battery / 2 Voltages) battery and IPX4 water protection, making it a versatile and reliable choice for effortless lawn maintenance.

MOW IN A U-SHAPED PATTERN

It can mow in a U-shaped pattern, improving the mowing coverage rate and saving time, thanks to its advanced algorithm technology. Robolinho® VISION's optimised path mowing delivers the best results on smaller, flat lawns. Several passes at different angles may be required for complete coverage.





VISUAL OBSTACLE DETECTION AND MULTI-ZONE SETTING

Robolinho® VISION uses its camera to recognise both stationary and moving objects and to be able to react quickly and move around them. It is also possible to activate the mowing of several zones for the Robolinho® VISION. Directional markers can be placed on the lawn to indicate the path from one zone to another, which the Robolinho® VISION can use to travel from zone A to zone B and back. Each mower is supplied with 3 directional markers.

REPLACEABLE BATTERY

The AL-KO 18 V / 36 V (1 Battery / 2 Voltages) replaceable battery system offers seamless convenience. When not in use, the battery can simply be removed from the back of the Robolinho® and used to power compatible hand tools – the Robolinho® also serves as a charging station, so no second battery is required.



ROBOLINHO® ACCESSORIES

NEW



VISION BASE STATION
For all Robolinho® VISION models, with base plate
EAN no. 400 371 806 7668
Art. no. 114 206



VISION ROBOTIC LAWNMOWER GARAGE
For VISION base station
EAN no. 400 371 806 7675
Art. no. 114 207



BLADE DISC Ø 21 cm
For Robolinho® 1121 VISION
EAN no. 400 371 806 7699
Art. no. 114 209



CUTTING DISC Ø 23 cm
For all Robolinho® RTK models
EAN no. 400 371 806 0287
Art. no. 127 544

RTK READY

Installing the AL-KO certified partner is simple: The new Robolinho® RTK component is installed and connected to the main board via a cable connection.



RTK UPGRADE KIT
– Enables specialised dealers to retrofit RTK technology to any Robolinho® Gen 3 model – "RTK ready"
– Also includes Comboard Gen 2 technology – retrofitted E models automatically become smart-connect W models too
– This kit enables the Robolinho® to mow in paths within the existing boundary wire
– Included in delivery: 1 x base plate base station, 1x retrofit kit for Robolinho® Gen 3, 1x RTK reference station, 1 x RTK cuff, 1x installation instructions
EAN no. 400 371 835 7196
Art. no. 123 115





BATTERY B100.6 Li
Li-ion 18 V / 36 V (5 Ah / 2.5 Ah)
1 Battery / 2 Voltages, with charge level indicator
EAN no. 400 371 806 6425
Art. no. 114 127



RTK RETROFIT BASE PLATE BASE STATION
EAN no. 400 371 835 7295
Art. no. 123 120

RTK



WALL EXTENSION
For RTK reference stations, for mounting on house walls to distance the RTK reference station from the wall and allow an unobstructed view of the sky.
EAN no. 400 371 835 7318
Art. no. 123 119



WALL MOUNT
For RTK reference stations, for mounting on house walls
EAN no. 400 371 835 7226
Art. no. 123 118



RTK REFERENCE STATION
– Transmits RTK correction data to the Robolinho®
– Communicates via LoRA WAN (up to 2 km distance)
– Can be used by several Robolinho® devices
– Triple GNSS band technology
EAN no. 400 371 835 7202
Art. no. 123 116



GROUND SPIKE
Optional accessory for RTK reference station.
1.5 m high.
EAN no. 400 371 835 7219
Art. no. 123 117

ROBOLINHO® ACCESSORIES

engineered in GERMANY
made in AUSTRIA



BASE STATION
With base plate, for all Robolinho® models except VISION.
EAN no. 400 371 805 9571
Art. no. 127 516



REPLACEMENT BLADES
Forall Robolinho® models,
3x 2-piece
EAN no. 400 371 805 8574
Art. no. 127 465



SET OF WHEEL CLAWS
For all Robolinho® models
EAN no. 400 371 806 3615
Art. no. 127 675



GROUND NAILS (90 pcs)
EAN no. 400 371 835 1477
Art. no. 119 461



LOOP WIRE
150 m long
EAN No. 400 371 835 1484
Art. no. 119 462



LOW VOLTAGE CABLE
extension (5 m long)
EAN no. 400 371 806 3622
Art. no. 127 676



REINFORCED LOOP WIRE
500 m long, on roll
EAN no. 400 371 806 5305
Art. no. 127 758



CABLE REPAIR KIT
For all Robolinho® models
with 6 connectors and 30 cm cable
EAN no. 400 371 805 5139
Art. no. 127 327



BLADE DISCS

For Robolinho® 520 W – Ø 20 cm
EAN no. 400 371 805 8581
Art. no. 127 466

For Robolinho® 822 W – Ø 22 cm
EAN no. 400 371 805 8598
Art. no. 127 467

For Robolinho® 1423 W / 2323 W – Ø 23 cm
EAN No. 400 371 806 0287
Art. no. 127 544

CABLE LAYING KITS



CABLE LAYING KIT
1 x loop wire 150 m long
1 x ground nails 90 pcs
5 x cable connectors
EAN no. 400 371 805 9540
Art. no. 127 513



CABLE LAYING KIT
2 x loop wire 150 m long
3 x ground nails 90 pcs
10 x cable connectors
EAN no. 400 371 805 9557
Art. no. 127 514





ROBOTIC LAWNMOWER GARAGE
The canopy is made from UV-resistant plastic, perfectly protecting all Robolinho® robotic lawnmowers against the weather during charging and idle times without impeding functionality. What's more, the practical folding mechanism ensures easy access to the keypad and display at all times. The strong latch also holds the roof in the open position.
For all Robolinho® models, including fixing nails for anchoring it firmly to the lawn.
Length x width x height: 60 x 57 x 39 cm
EAN no. 400 371 835 6267
Art. no. 119 990





QUICK HOMING KIT
For quick return to the base station. The Quick Homing Kit efficiently navigates the Robolinho® to its base station via the shortest route. Leaving the lawn in perfect condition and well cared for. No tracks are left in the grass and energy consumption is reduced. Up to three Quick Homing Kits can be installed per installation.
EAN no. 400 371 806 4308
Art. no. 127 699

BATTERY LAWNMOWERS

WITH BATTERY POWER TO THE PERFECT LAWN

AL-KO 36 V

COMFORT *pro* PREMIUM *pro*





CORDLESS LAWN MOWER COMFORT *pro* AND PREMIUM *pro* WITH DOUBLE BATTERY COMPARTMENT

Some of our battery lawn mowers offer two battery compartments. Only one battery is required for operation (Figure 1). You have the option of inserting a second battery to extend the operating time. There is also the option of inserting two batteries with different Ah capacities into the battery compartment. If two batteries are fitted, the battery with the stronger charge is first discharged to the voltage of the weaker battery. Both batteries are then discharged steadily in parallel. This also applies if there are two 4 Ah batteries fitted in the battery compartment but with different charge levels (Figure 2). This feature offers utmost versatility while protecting your batteries.





DESIGN MEETS "QUALITY FOR LIFE"

Admire the high-quality finished materials, such as the robust steel plate deck, the extremely sturdy grass collector, which is made of hard plastic and fabric, as well as the high-quality handlebar height adjustment and front carry handle made of aluminium.

NO EXHAUST GASES, NO CABLES – JUST FULL MOWING POWER

Our **cordless lawnmowers** are the perfect tool for garden areas up to 1300 m². Opt for a battery-powered lawnmower if you fancy a lightweight, manoeuvrable machine, which can be used flexibly and easily. A high-quality lithium-ion battery is at the heart of solo® by AL-KO battery lawnmowers. The lithium-ion technology ensures that the battery does not spontaneously discharge, and as such prevents the so-called memory effect which reduces the effective capacity of the batteries. Batteries from the AL-KO 36 V range reliably display their current charge level by means of LEDs. As such, you can always count on a powerful appliance. Battery lawnmowers are the real lightweights in their class, meaning they are simple to transport and easy to put away. Selected models also offer folding handlebars and can be folded away in no time.

CENTRAL CUTTING HEIGHT ADJUSTMENT

The ergonomic height-adjustment handle can be used to conveniently adjust the cutting height and choose between 7 stages in just one hand motion.



AL-KO 36 V PREMIUM *pro*

engineered in GERMANY

made in AUSTRIA





USEFUL ALUMINIUM CARRY HANDLE

Does the lawnmower need to be loaded into the boot of your car or moved into the cellar over the winter months? Thanks to the aluminium front carry handle, the lawnmower can be carried or transported with ease.





EASY ALUMINIUM HANDLEBAR ADJUSTMENT

High-quality aluminium height-adjustable handlebar lever with fasteners – the simple way to adjust the height of your handlebar to your needs, quickly and easily.

EVERYTHING UNDER CONTROL

The ergonomically shaped handlebar with soft foam coating ensures comfortable driving and steering of your lawn mower.



INCLUDES MULCHING INSERT AND SIDE DISCHARGE

Thanks to the mulching insert, you no longer need to waste time emptying the grass collector, and the grass clippings remain on the lawn as a natural fertiliser. The easy to fit side discharge deflector is used to discharge grass clippings in neat row – useful on rough terrain or in orchards etc.



ADVANTAGES OF OUR PREMIUM *pro* BATTERY LAWNMOWERS

Our PREMIUM *pro* battery lawnmowers are the superstars among our lawnmowers. Quiet, environmentally friendly and generally maintenance free. They will tend to your garden for many years to come. Effortlessly use the mower to mow large grass areas up to 1300 m² including difficult terrain and gardens with an abundance of trees and bushes. not stop. Find the right cordless lawnmower tailored to your requirements and benefit from more than 50 years of experience in gardening equipment. Identify lawnmowers engineered in Germany and produced at our own premises in Austria by the “Engineered in Germany - Made in Austria” logo above.

AL-KO 36 V





	3833 Li P	4232 Li P	4232 Li SP
	EASY *pro*	COMFORT *pro*	COMFORT *pro*
Cutting width	37 cm	42 cm	42 cm
For lawns up to*	650 m²	650–1,300 m²	650–1,300 m²
Battery type	Li-ion 36 V 2.5 Ah / 4.0 Ah / 5.0 Ah / 8.0 Ah	Li-ion 36 V 2.5 Ah / 4.0 Ah / 5.0 Ah / 8.0 Ah	Li-ion 36 V 2.5 Ah / 4.0 Ah / 5.0 Ah / 8.0 Ah
Battery compartment for up to	1 battery	2 batteries with Balanced Discharging System**	2 batteries with Balanced Discharging System**
Brushless motor	✓	✓	✓
Cutting height / cutting height adjustment	25–75 mm / central, 6-stage	30–75 mm / central, 7-stage	30–75 mm / central, 7-stage
Wheel drive	–	–	1-speed
Wheel diameter, front / rear	150 / 230 mm	180 / 205 mm	180 / 220 mm
Mower deck	Plastic	Steel plate	Steel plate
Grass collector volume / material	45 l, fabric / hard-top	65 l, fabric / hard-top	65 l, fabric / hard-top
MAX AIRFLOW technology	–	–	–
Smart-Connected / maxRun® & smart Cockpit	– / –	– / –	– / –
Function	2IN1 ONE function	2IN1 ONE function	2IN1 ONE function
Mulching / side discharge	– / –	Optional (art. no. 463722) / –	Optional (art. no. 463722) / –
Approx. weight	17.6 kg	24.6 kg	25 kg
WITHOUT BATTERY OR CHARGER – **EAN no.**	400 371 806 4353	400 371 806 1437	400 371 806 3363
WITHOUT BATTERY OR CHARGER – **Art. no.**	**127 701**	**127 597**	**127 661**
SET INCL. BATTERY + CHARGER 3 A – **EAN no.**	400 371 806 6210	400 371 806 6289	400 371 806 6296
SET INCL. BATTERY + CHARGER 3 A – **Art. no.**	**127 784** (set with 4 Ah battery)	**127 785** (set with 4 Ah battery)	**127 786** (set with 2.5+ 4 Ah battery)
SET INCL. 2 x BATTERIES (4+8 Ah) + CHARGER 3 A – **EAN no.**	–	–	–
SET INCL. 2 x BATTERIES (4+8 Ah) + CHARGER 3 A – **Art. no.**	–	–	–

	4732 Li SP	4735 Li VS	4772 Li VS-W	5272 Li VS-W
	COMFORT *pro*	COMFORT *pro*	PREMIUM *pro*	PREMIUM *pro*
	46 cm	46 cm	46 cm	51 cm
	650–1,300 m²	650–1,300 m²	650–1,300 m²	650–1,300 m²
	Li-ion 36 V 2.5 Ah / 4.0 Ah / 5.0 Ah / 8.0 Ah	Li-ion 36 V 2.5 Ah / 4.0 Ah / 5.0 Ah / 8.0 Ah	Li-ion 36 V 2.5 Ah / 4.0 Ah / 5.0 Ah / 8.0 Ah	Li-ion 36 V 2.5 Ah / 4.0 Ah / 5.0 Ah / 8.0 Ah
	2 batteries with Balanced Discharging System**	2 batteries with Balanced Discharging System**	2 batteries with Balanced Discharging System**	2 batteries with Balanced Discharging System**
	✓	✓	✓	✓
	30–80 mm / Central, 7-stage	30–80 mm / Central, 7-stage	30–80 mm / central, 7-stage	30–80 mm / central, 7-stage
	1-speed	Variable	Variable	Variable
	200 / 280 mm	200/280 mm, ball-bearing mounted	200 / 280 mm	200 / 280 mm
	Steel plate	Steel plate	Steel plate	Steel plate
	70 l, fabric / hard-top	70 l, fabric / hard-top	70 l, fabric / hard-top	70 l, fabric / hard-top
	✓	✓	✓	✓
	– / –	– / ✓	✓ / ✓	✓ / ✓
	3IN1 ONE function	3IN1 ONE function	4IN1 ONE function	4IN1 ONE function
	✓ / –	✓ / –	✓ / ✓	✓ / ✓
	30.3 kg	30.3 kg	31.8 kg	34.3 kg
	400 371 806 1444	400 371 806 6265	400 371 806 1451	400 371 806 1468
	127 598	**127 798**	**127 599**	**127 600**
	400 371 806 6302	400 371 806 7408	–	–
	127 787 (set with 8 Ah battery)	**127 834** (set with 8 Ah battery)	–	–
	–	–	400 371 806 6319	400 371 806 6326
	–	–	**127 789**	**127 790**

*Area coverage depends on the battery selection.

**Details on the Balanced Discharging System can be found on page 25.



REPLACEMENT BLADE 37 CM
For 3833 Li P
EAN no. 400 371 804 7974
Art. no. 113 127



REPLACEMENT BLADE 42 CM
For 4232 Li P, 4232 Li SP
EAN no. 400 371 805 5658
Art. no. 113 347



REPLACEMENT BLADE 46 CM
For 4732 Li SP, 4735 Li VS 4772 Li VS-W
EAN no. 400 371 805 5665
Art. no. 113 348



REPLACEMENT BLADE 51 CM
For 5272 Li VS-W
EAN no. 400 371 806 3370
Art. no. 113 979

PETROL LAWNMOWERS

IN USE FOR YEARS AND STANDING THE TEST OF TIME



MOW LARGE AREAS EASILY AND QUICKLY WITH HIGH EFFICIENCY

Take perfect care of your lawns in no time with a powerful petrol lawnmower. Regardless of whether you need to mow a vast area or take care of a medium-sized garden. Our solo® by AL-KO petrol lawnmowers effortlessly cut thick grass on uneven terrain.



EFFICIENT MOWING THANKS TO MAXAIRFLOW TECHNOLOGY

Extra tall, extra large – that's the basis of MaxAirflow technology. Thanks to the extra-high steel plate deck and the extra-large discharge channel, airflow is increased by 42%. So unlike in standard lawnmowers, the grass clippings are not thrown at a low angle into the grass collector, but rather in a high arc. This means the grass collector is effectively filled from the back, without the discharge channel becoming blocked.





UTMOST VERSATILITY

In addition to mowing and collecting, all solo® by AL-KO petrol lawnmowers offer the option of ecologically maintaining the lawn with the help of the mulching function. Finely chopped grass clippings are used as an organic fertiliser. The additional side discharge provided on a number of models provides maximum versatility. As such, it is possible to mow large areas quickly and keep high grass under control without having a grass collector to empty.

THE BEST RESULTS AND PROVEN QUALITY

Petrol lawnmowers are the classics among lawnmowers. They will tend to your garden for many years thanks to their durable components. They make light work of large grass areas, difficult terrain and gardens with plenty of trees. Whether you prefer mowing and collecting, mulching or side discharge, our innovative mower decks guarantee you the best lawn care results.

Find the right lawnmower for your lawn and benefit from more than 60 years of experience in gardening equipment. You can identify lawnmowers engineered in Germany and produced at our own premises in Austria by the “Engineered in Germany - Made in Austria” logo above.

Depending on the model, our petrol lawnmowers are equipped with several functions. They are easily identifiable by the following logos in the tables: 3INONE function and 4INONE function.

EASY TO SERVICE WITH INNOVATIVE AND DURABLE SOLUTIONS

In addition to the discharge channel, a gearbox cover is provided to facilitate servicing and inspecting the belt. The belt is protected against the cutting blade and grass residue by the belt cover. This makes the lawnmower durable and less prone to damage. Our PREMIUM pro models include aluminium handlebar reinforcements, which provide greater stability and durability, are visually appealing and are easy to use. The two clips on these handlebar reinforcements can be pressed to individually adjust this handlebar in line with your height requirements.



EASY pro

ADVANTAGES OF OUR EASY pro PETROL LAWNMOWERS

- Quick-start system (QSS) for quickly and simply starting the engine
- Central cutting height adjustment
- Grass collector fill level indicator
- Mulching function for ecological lawn care









	4216 P-A	4216 SP-A	4716 P-A	4716 SP-A	5216 SP-A
	EASY pro	EASY pro	EASY pro	EASY pro	EASY pro
Cutting width	41 cm	41 cm	46 cm	46 cm	51 cm
For lawns up to	800 m²	1,200 m²	1,300 m²	1,500 m²	1,800 m²
Engine	AL-KO Pro 125 QSS	AL-KO Pro 125 QSS	AL-KO Pro 125 QSS	AL-KO Pro 145 QSS	AL-KO Pro 170 QSS
Power	123 ccm / 1.9 kW / 2,800 rpm	123 ccm / 1.9 kW / 2,800 rpm	123 ccm / 1.9 kW / 2,800 rpm	139 ccm / 2.1 kW / 2,800 rpm	166 ccm / 2.6 kW / 2,800 rpm
Wheel drive	–	✓	–	✓	✓
Wheel diameter, front / rear	150 / 200 mm	150 / 200 mm	180 / 255 mm	180 / 255 mm	180 / 255 mm
Cutting height / height adjustment	25–75 mm / central, 7-stage	25–75 mm / central, 7-stage	25–75 mm / central, 7-stage	25–75 mm / central, 7-stage	25–75 mm / central, 7-stage
Mower deck	Steel plate	Steel plate	Steel plate	Steel plate	Steel plate
Grass collector volume / material	50 l, fabric / hard-top	50 l, fabric / hard-top	65 l, fabric / hard-top	65 l, fabric / hard-top	65 l, fabric / hard-top
Function	3IN ONE function	3IN ONE function	4IN ONE function	4IN ONE function	4IN ONE function
Mulching function	✓	✓	✓	✓	✓
Side discharge	–	–	✓	✓	✓
Approx. weight	21 kg	23.2 kg	24 kg	26.2 kg	28 kg
EAN no.	400 371 806 7132	400 371 806 7149	400 371 806 7156	400 371 806 7163	400 371 806 7170
Art. no.	**127 813**	**127 814**	**127 815**	**127 816**	**127 817**



REPLACEMENT BLADE 41 CM
For 4216 P-A, 4216 SP-A
EAN no. 400 371 806 7613
Art. no. 127 837



REPLACEMENT BLADE 46 CM
For 4716 P-A, 4716 SP-A
EAN no. 400 371 806 7620
Art. no. 127 838



REPLACEMENT BLADE 51 CM
For 5216 SP-A
EAN no. 400 371 806 7637
Art. no. 127 839



Fill level indicator
Indicates when your grass collector is full and ready to empty, preventing grass clippings from spilling out onto your lawn.



Quick release
For quick folding of the handlebar without tools, for compact storage and transport.



Handlebar height adjustment
3-way height-adjustable bar.

COMFORT *pro*



ADVANTAGES OF OUR COMFORT *pro* PETROL LAWNMOWERS

- Maximum flexibility thanks to mulching function and side discharge*
- MaxAirflow technology*
- Electric starter for swift and safe start-up at the turn of a key**
- Maximum comfort thanks to VarioSpeed wheel drive**
- Central cutting height adjustment
- Grass collector fill level indicator

*Available for all COMFORT *pro* models (except 4238 SP-A)
**Available for 4734 VSED-A







	4238 SP-A	4731 SP-A	4734 VSED-A
	COMFORT *pro*	COMFORT *pro*	COMFORT *pro*
Cutting width	42 cm	46 cm	46 cm
For lawns up to	1,000 m²	1,400 m²	1,400 m²
Engine	AL-KO Pro 145 QSS	AL-KO Pro 145 QSS	AL-KO Pro 170 Dual Start
Power	139 ccm / 2.1 kW / 2,850 rpm	139 ccm / 2.1 kW / 2,850 rpm	166 ccm / 2.6 kW / 2,800 rpm
Wheel drive	1-speed	1-speed	Variable
Wheel diameter, front / rear	180 / 220 mm, ball-bearing mounted	200 / 280 mm ball-bearing mounted	200 / 280 mm ball-bearing mounted
Cutting height / height adjustment	30–75 mm / central, 7-stage	30–80 mm / central, 7-stage	30–80 mm / central, 7-stage
Mower deck	Steel plate	Steel plate	Steel plate
Grass collector volume / material	65 l, fabric / hard-top	70 l, fabric / hard-top	70 l, fabric / hard-top
MAXAIRFLOW technology	–	✓	✓
Function	3IN1 function	4IN1 function	4IN1 function
Mulching function	✓	✓	✓
Side discharge	–	✓	✓
Approx. weight	35.2 kg	34.0 kg	36.8 kg
EAN no.	400 371 805 8284	400 371 806 1765	400 371 806 4841
Art. no.	**127 454**	**127 602**	**127 715**

	5231 SP-A	5231 SP-H
	COMFORT *pro*	COMFORT *pro*
	51 cm	51 cm
	1,800 m²	1,800 m²
	AL-KO Pro 170 QSS	Honda GCVx 170
	166 ccm / 2.6 kW / 2,850 rpm	167 ccm / 3.2 kW / 2,900 rpm
	1-speed	1-speed
	200 / 280 mm, ball-bearing mounted	200 / 280 mm, ball-bearing mounted
	30–80 mm / central, 7-stage	30–80 mm / central, 7-stage
	Steel plate	Steel plate
	70 l, fabric / hard-top	70 l, fabric / hard-top
	✓	✓
	4IN1 function	4IN1 function
	✓	✓
	✓	✓
	35.5 kg	36.5 kg
	400 371 806 1772	400 371 806 1796
	127 603	**127 605**

AL-KO PRO 170 DUAL START

- Manual and electric starter
- Maximum comfort and safety – start the engine at any time
- Space-saving and maintenance-friendly upright storage



PREMIUM *pro*

- Optimum stability and durability
- Optimum aerodynamics for a perfectly filled grass collector
- Full range of convenient features
- MaxAirflow technology







	4754 VS-A	4754 VSED-A	5254 VS-A
	PREMIUM*pro*	PREMIUM*pro*	PREMIUM*pro*
Cutting width	46 cm	46 cm	51 cm
For lawns up to	1,400 m²	1,400 m²	1,800 m²
Engine	AL-KO Pro 170 QSS	AL-KO Pro 170 Dual Start	AL-KO Pro 170 QSS
Power	166 ccm / 2.6 kW / 2,850 rpm	166 ccm / 2.6 kW / 2,800 rpm	166 ccm / 2.6 kW / 2,850 rpm
Wheel drive	Variable	Variable	Variable
Wheel diameter, front / rear	200/280 mm, ball-bearing mounted	200/280 mm, ball-bearing mounted	200 /280 mm, ball-bearing mounted
Cutting height / height adjustment	30–80 mm / central, 7-stage	30–80 mm / central, 7-stage	30–80 mm / central, 7-stage
Mower deck	Steel plate	Steel plate	Steel plate
Grass collector volume / material	70 l, fabric / hard-top	70 l, fabric / hard-top	70 l, fabric / hard-top
MAX AIRFLOW technology	✓	✓	✓
Function	4IN ONE function	4IN ONE function	4IN ONE function
Mulching function	✓	✓	✓
Side discharge	✓	✓	✓
Aluminium handlebar connection (incl. height adjustment)	✓	✓	✓
Approx. weight	35.4 kg	38.0 kg	35.9 kg
EAN no.	400 371 806 4858	400 371 806 4865	400 371 806 4872
Art. no.	**127 716**	**127 717**	**127 718**



	5254 VSED-A	5274 VS-H
	PREMIUM*pro*	PREMIUM*pro*
	51 cm	51 cm
	1,800 m²	1,800 m²
	AL-KO Pro 170 Dual Start	Honda GCVx 200
	166 ccm / 2.6 kW / 2,800 rpm	201 ccm / 3.8 kW / 2,900 rpm
	Variable	Variable
	200 /280 mm, ball-bearing mounted	200 / 280 mm, ball-bearing mounted
	30–80 mm / central, 7-stage	30–80 mm / central, 7-stage
	Steel plate	Steel plate
	70 l, fabric / hard-top	70 l, fabric / hard-top
	✓	✓
	4IN ONE function	4IN ONE function
	✓	✓
	✓	✓
	✓	✓
	40.0 kg	43.0 kg
	400 371 806 4889	400 371 806 4896
	127 719	**127 720**



REPLACEMENT BLADE 42 cm
For 4238 SP-A
EAN no. 400 371 804 8650
Art. no. 113 138



REPLACEMENT BLADE 46 cm
For 4754 VS-A, 4754 VSED-A, 4731 SP-A, 4734 VSED-A
EAN no. 400 371 804 7271
Art. no. 113 057

ACCESSORIES FOR ALL PETROL LAWNMOWERS



STARTER KIT
4-part 5 l petrol can set, engine oil service kit and 2 x lawnmower oil SAE 30
EAN no. 400 371 806 1963
Art. no. 113 875



ENGINE OIL SERVICE KIT
3-part kit with suction pump, tank and funnel
EAN no. 400 371 806 1413
Art. no. 113 807



4-STROKE LAWNMOWER OIL
10W40 1 l
EAN no. 400 371 804 4089
Art. no. 112 901



4-STROKE LAWNMOWER OIL
SAE 30, 0.6 l
EAN no. 400 371 804 3952
Art. no. 112 888



REPLACEMENT BLADE 51 cm
For 5254 VS-A, 5254 VSED-A, 5274 VS-H, 5231 SP-A, 5231 SP-H
EAN 400 371 804 7288
Art. no. 113 058



AIR FILTER SET
2-part set, for AL-KO Pro 125 QSS and AL-KO Pro 145 QSS engine
EAN no. 400 371 805 9588
Art. no. 113 693

PREMIUM *pro*

CAST ALUMINIUM HOUSING

- Optimum stability and durability
- Optimum aerodynamics for a perfectly filled grass collector
- Torsion-resistant, stainless, noise-insulating and extremely robust against impacts and uneven surfaces
- Full range of convenient features
- Innovative and simple cutting height adjustment





	4852 VS ALU	5352 VS ALU
	PREMIUM*pro*	PREMIUM*pro*
Cutting width	47 cm	52 cm
For lawns up to	1,500 m²	2,000 m²
Engine	AL-KO Pro 170 QSS	AL-KO Pro 170 QSS
Power	166 ccm / 2.6 kW / 2,850 rpm	166 ccm / 2.6 kW / 2,850 rpm
Wheel drive	Variable	Variable
Wheel diameter, front / rear	200 / 280 mm ball-bearing mounted	200 / 280 mm ball-bearing mounted
Cutting height / height adjustment	30–85 mm central, 6-stage	30–85 mm central, 6-stage
Mower deck	Aluminium	Aluminium
Grass collector volume / material	75 l, fabric / hard-top	75 l, fabric / hard-top
MAX AIRFLOW technology	✓	✓
Power	4IN ONE function	4IN ONE function
Mulching function	✓	✓
Side discharge	✓	✓
Aluminium handlebar connection (incl. height adjustment)	✓	✓
Approx. weight	49.1 kg	52.6 kg
EAN no.	400 371 806 2748	400 371 806 2755
Art. no.	**127 631**	**127 632**



	548 K	553 K
	PREMIUM*pro*	PREMIUM*pro*
	48 cm	53 cm
	2,000 m²	2,500 m²
	Honda GXV 160	Honda GXV 160
	163 ccm / 2.7 kW / 2,800 rpm	163 ccm / 2.7 kW / 2,800 rpm
	2-speed (Cardan) Blade brake clutch**	2-speed (Cardan) Blade brake clutch*
	203 / 203 mm, ball-bearing mounted, aluminium	244 / 244 mm, ball-bearing mounted, aluminium
	15 - 77 mm, axle/individual wheel, 7-stage	26 - 82 mm, axle/individual wheel, 7-stage
	Aluminium with steel insert	Aluminium with steel insert
	70 l, fabric	70 l, fabric
	✓	✓
	2IN ONE function	2IN ONE function
	Optional (art. no. 127 473)	Optional (art. no. 126 680)
	–	–
	–	–
	58.2 kg	65.6 kg
	400 371 805 8222	400 371 805 1681
	127 448	**127 148**

*Blade brake clutch

ACCESSORIES ALU MOWERS



47 CM REPLACEMENT BLADE
For 4852 VS ALU
EAN no. 400 371 834 9351
Art. no. 119 260



52 CM REPLACEMENT BLADE
For 5352 VS ALU
EAN no. 400 371 834 8286
Art. no. 119 167

BY PROFESSIONALS FOR PROFESSIONALS

- Robust professional tool for commercial use
- Long hours of professional work
- Powerful and durable Honda engine
- Cast aluminium deck with steel insert
- Shaft drive transmission
- Blade brake clutch for engaging and disengaging the cutting blade when the engine is running

ACCESSORIES FOR 548 K / 553 K



MULCHING KIT

For 548 K
EAN no. 400 371 805 8710
Art. no. 127 473

For 553 K
EAN no. 401 596 659 4285
Art. no. 126 680

HAND LAWNMOWER

PRACTICAL HAND LAWNMOWER FOR A PERFECT GOLF-GREEN FINISH

These practical machines let you perfectly mow small gardens, front gardens and ornamental lawns up to a size of 500 m².
Neither a power supply nor petrol is required. Our hand lawnmower is comfortable, emission-free and incredibly quiet. Its single-axle design, ergonomic handlebar and low weight make it extremely manoeuvrable.
The stylish steel housing is very robust.
Thanks to its compact design and low weight, you can easily transport the hand lawnmowers over steps to and from the lawn.

RAZOR-SHARP SPECIAL CYLINDER
The single-axle design ensures extreme manoeuvrability and is comfortable on uneven ground.

EASY TO USE AND INCREDIBLY MANOEUVRABLE ON THE LAWN
The high-quality 5-blade cutting cylinder made of special hardened steel ensures a perfect cut and uniform filling of the grass collector.

COMFORTABLE ON ANY TERRAIN
Thanks to the rubberised XL tyres, the mower can travel forwards efficiently and comfortably even on bumpy ground and longer grass.



4056 HM Premium

PREMIUM*pro*

Cutting width	40 cm
For lawns up to	500 m²
Drive type	Manual operation
Cutting cylinder	150 mm
Blade technology	Cylinder, contactless
Wheel diameter	220 mm
Cutting height / cutting height adjustment	18–34 mm, 4-stage
Mesh collecting box	Optional (25 l, art. no. 113 887)
Mower deck	Steel plate
Approx. weight	12.6 kg
EAN no.	400 371 806 7842
Art. no.	**127 850**



MULCH MOWERS

ECO-FRIENDLY LAWN CARE THANKS TO NATURAL FERTILISATION





TRANSFORM YOUR LAWN INTO A LUSH, GREEN AND HEALTHY LAWN WITH MULCHING

The powerful engines driving our petrol and battery-powered mulching mowers ensure you achieve the best mulching results, even in dense grass. The powerful engines driving our petrol and battery-powered mulching mowers ensure you achieve the best mulching results, even in dense grass. During mulching, the cut blades of grass are thrown upwards within the mower housing, finely shredded by a special blade and blown back onto the lawn as a natural fertiliser – this returns nutrients to the roots and protects the lawn against drying out.

If mulching is not possible due to the length of grass, it can easily be converted to side discharge.



REPLACEMENT BLADE
EAN no. 400 371 834 8859
Art. no. 119 224

	4736 Li VS MULCH & GROW	4734 SP-A MULCH & GROW
	COMFORT pro	COMFORT pro
Cutting width	46 cm	46 cm
For lawns up to	400–800 m²	1,400 m²
Engine	AL-KO 36 V Brushless motor	AL-KO Pro 170 QSS
Power	Li-ion 36 V 2.5 Ah / 4.0 Ah / 5.0 Ah / 8.0 Ah	166 ccm / 2.6 kW / 2,850 rpm
Wheel drive	Front wheel, variable	Front wheel, variable
Wheel diameter, front / rear	220 / 205 mm, ball-bearing mounted	220 / 205 mm, ball-bearing mounted
Cutting height / cutting height adjustment	30–85 mm / wheel axle, 4-stage	30–85 mm / wheel axle, 4-stage
Mower deck	Steel plate	Steel plate
Function	2IN1ONE function	2IN1ONE function
Side discharge	✓	✓
Approx. weight	26.5 kg	26.5 kg
EAN no.	400 371 806 5329	400 371 806 4902
Art. no.	**127 723**	**127 721**
SET INCL. 1 BATTERY (8 AH) + CHARGER 3 A — **EAN no.**	400 371 806 7798	
SET INCL. 1 BATTERY (8 AH) + CHARGER 3 A — **Art. no.**	**127 844**	

BATTERY RIDE-ON LAWNMOWER

LOW-EMISSION MOWING WITH NO EXHAUST FUMES





LOW-EMISSION MOWING WITH AL-KO 36V BATTERIES

Ride-on mowers also known as **riders** are comparable in terms of performance to classic lawnmowers. On these models, the drive element is fitted under the seat, which is where the name “Rider” comes from. Up to six removable AL-KO 36 V batteries can also be used in many other AL-KO 36 V tools. They enable sustainable operation and their quiet operation ensures greater comfort. A handy feature is the adjustment of the blade speed in difficult conditions. Furthermore, the ride-on mower is able to reverse mow at full speed. A high degree of ergonomics is achieved by means of the easy-to-use controls, the adjustable seat, the anti-slip steering wheel and the complete absence of engine noise and exhaust gases. The large grass collector means you can mow the grass for longer before needing to empty it and also features a fill level indicator with acoustic signal, which sounds once the box is completely filled.



DEFLECTOR
EAN no. 400 371 806 6388
Art. no. 127 806



R 74.5 Li 36 V

PREMIUM *pro*

Working width / mowing radius	74 cm / 85 cm
Area coverage*	4,500 m²
Battery	Li-ion 36 V (replaceable batteries) 6x 2.5 Ah / 4 Ah / 8 Ah
Max. drive motor power	1.2 kW
Blade motor power	2x 0.8 kW
Max. operating time	60 min. (with 6x 8.0Ah batteries)
Cutting height / height adjustment	3.0–8.0 cm / 6-stage manual with lever
Transmission	Electrical
Speed forward / backwards	8 km/h / 6 km/h
Grass collector volume / material	190 l / fabric
Grass collector emptying	Telescopic lever
Tyre size front / rear (")	13 x 5.00-6 / 15 x 6.00-6
Included in delivery	Charger
Length x width x height approx.	240 x 90.6 x 110 cm
WITHOUT BATTERIES, INCL. CHARGER 8 A	**EAN no.** 400 371 806 5947
	Art. no. **127 776**
WITHOUT BATTERIES, INCL. CHARGER 8 A	**EAN no.** 400 371 806 6098
	Art. no. **127 783**

*Area coverage depends on the battery selection.

AL-KO 36 V





AL-KO 36 V

All **AL-KO 36V** garden tools can be used with the batteries and chargers listed on **pages 6**. Other garden tools from this battery range can be found on **pages 6 - 11**.

PETROL RIDE-ON LAWNMOWERS

SMALL, PRECISE AND MANOEUVRABLE





MANOEUVRABLE AND FUN TO USE, WITH A GUARANTEED PERFECT FINISH

Our **petrol ride-on mowers** are comparable in terms of performance to that of classic lawnmowers. The size of our petrol ride-on mowers makes them dynamic and easy to manoeuvre around crooked plots of land and the many obstacles you find in the garden. Ride-on mowers, with their narrow width, are the ideal choice for gardens with narrow passages. They are driven by a powerful AL-KO Pro or Briggs & Stratton engine. A high degree of ergonomics is achieved by means of the comfortable adjustable seat, easy-to-use controls and the anti-slip steering wheel. The grass collector can be conveniently emptied using the telescopic lever and an alarm sounds to warn users when it is full. The Premium model R 7-65.8 HD boasts an infinitely variable hydrostatic drive with foot pedal, the option of reverse mowing at full speed, and optimised steering thanks to special gearing.



	R 7-63.8 A	R 7-65.8 HD
	COMFORT *pro*	PREMIUM *pro*
Working width / mowing radius	62 cm / 63 cm	62 cm / 63 cm
For areas up to	2,500 m²	3000 m²
Engine	AL-KO Pro 225 (1 cylinder)	B&S PXi 1000 (1 cylinder)
Power	224 ccm / 4.2 kW / 3,000 rpm	223 ccm / 4.2 kW / 3,000 rpm
Cutting height / height adjustment	2.5–7.5 cm / central 4-stage	2.5–7.5 cm / central 4-stage
Transmission	Manual gearbox (F: 4 / R: 1)	Foot operated hydrostatic (T1)
Speed forward / backwards	0–4.5 km/h / 0–1.5 km/h	0–6.2 km/h / 0–3.8 km/h
Grass collector volume / material	130 l / fabric	130 l / fabric
Grass collector emptying	Telescopic lever	Telescopic lever
Blade engagement	Mechanical	Mechanical
Tyre size front / rear (")	11 x 4.0–5 / 13 x 5.0–6	11 x 4.0–5 / 13 x 5.0–6
Length x width x height approx.	190 x 66 x 110 cm	190 x 66 x 110 cm
EAN no.	400 371 805 9304	400 371 805 9298
Art. no.	**127 486**	**127 487**

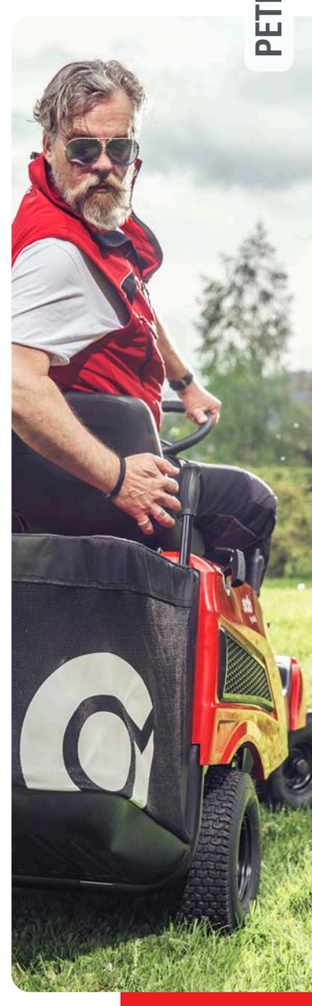

ACCESSORIES FOR R 7 RIDE-ON LAWNMOWERS



DEFLECTOR
EAN no. 400 371 805 9793
Art. no. 127 534

ZERO TURN

AGILITY AND PURE RIDING ENJOYMENT









MAXIMUM MANOEUVRABILITY MEETS PURE EFFICIENCY – THE ZERO TURN MOWER FOR PROFESSIONALS AND DEMANDING USERS

Equipped with the latest 360° turning technology, this mower can turn on the spot for absolutely precise work around flowerbeds, trees and tight corners. No manoeuvring, no repositioning – simply maximum control with every movement.
The powerful motor ensures effortless propulsion, even on extensive or challenging terrain. The robust mowing deck made of high-quality steel guarantees a clean, even cut with every pass. The easy-to-operate cutting height adjustment via the control wheel enables precise adjustment to any lawn – for results that really impress.

The ergonomic seating position guarantees comfortable and fatigue-free working even during prolonged use. The large rear wheels offer optimum grip on uneven ground and are particularly gentle on your lawn.

Ideal for private users, landscape gardeners and municipal service providers who value efficiency, durability and professional cutting performance.

ZT 18-107.6 A

PREMIUM *pro*

Cutting width	107 cm (2 blades)
For lawns up to*	12,000 m²
Engine	AL-KO PRO 600 V2
Number of cylinders	2 cylinders
Power	586 ccm / 12.5 KW / 2,800 rpm
Transmission	Hydrostatic
Blade engagement	Electrical
Front/rear wheels	11" x 6.5 / 20" x 8–10
Cutting height / height adjustment	25–102 mm / 13 positions
Headlights	LED
Max. forwards speed	11 km/h
Reverse speed	5 km/h
EAN no.	400 371 806 7217
Art. no.	**127 821**



*In optimum mowing conditions

TRACTORS

THE TOP CLASS OF LAWN CARE

Impeccable mowing on any terrain – and that's from the comfort on your seat, in next to no time. Regardless of whether you opt for a battery or petrol-driven tractor, our tractors come equipped with a wide range of benefits and smart features.



EEFORTLESSLY MOW LARGE AND TRICKY AREAS

Where lawnmowers and riders reach their performance limits, that's where our lawn tractors come into their own. The engines provide greater power, meaning that it really doesn't matter whether you need to manoeuvre your ride-on lawn tractor across winding terrain or mow large lawns – look no further than our lawn tractors. Combining power and comfort, they mow areas of up to 12,000 m².



MAKE MOWING A CLASSY AFFAIR

Our **ride-on lawn tractors** give you a very special experience when maintaining your lawn. With tried-and-tested drives and cutting widths of up to 125 cm, you can find the right machine for every requirement. Feel how comfortable mowing is as soon as you get behind the wheel. You'll be in safe hands with the ride-on lawn tractor which makes mowing a truly pleasurable experience. Simply climb on, turn the key, put your foot on the pedal, and enjoy yourself! Take lawn mowing to the next level with ride-on lawn tractors engineered in Germany and made at our factory in Austria.

MAXIMUM COMFORT AND FLEXIBILITY

You'll have no problem making yourself comfortable on our lawn tractors! Our lawn tractors offer comfort a cut above the rest. The low entry level, ergonomic mowing position as well as the ample legroom promote comfortable mowing without feeling tired, as well as spending more time behind the wheel. Our lawn tractors have become real all-rounders, both in summer and winter, owing to their wide range of accessories.



INNOVATIVE AND DURABLE SOLUTIONS

With our quality promise "Engineered in Germany, Made in Austria", we are developing innovative solutions for our ride-on mowers ensuring that the machines are as comfortable and durable as possible. All our ride-on mowers feature our patented C-profile frame, offering durable operation, as well as our patented freewheel mechanism to reduce gearbox wear and tear. The innovative design, combined with high-quality components such as the electromagnetic blade brake clutch, foot-operated hydrostatic transmission and extremely precise steering, put our ride-on lawn tractors in a class of their own.



MOWING WITH GREATER EFFICIENCY

Our lawn tractors can be used with side discharge, rear discharge and mulching functions. The side discharge function is particularly useful if you need to cover large areas of grass in a jiffy. The highest mowing quality is achieved with regular mulching, whereby the grass is deposited on the lawn in fine clippings. If grass cuttings need to be collected, our lawn tractors with rear discharge function are the ideal choice. Extra high, extra large – that's the approach taken by MaxAirflow technology for our rear discharge lawn tractors when it comes to increasing efficiency compared with standard ride-on mowers.



BATTERY TRACTORS

PREMIUM pro e





EMISSION-FREE E-POWER

Our solo® by AL-KO **battery ride-on lawn tractors** are developed in Germany and produced in our factory in Austria. They have large, lawn-friendly tyres and an extremely powerful battery. Optional upgrade to complete setup including maxRun® & smart Cockpit. The 3100 models also offer the option of extending the coverage with a mobile power pack and the AL-KO 36 V battery. Battery ride-on lawn tractors offer the same level of power as petrol ride-on tractors – with the difference being that their maintenance intervals are less frequent than for petrol engines: for example, there is no need to change spark plugs or oil, or refuel.

All you need to do is charge the battery.

OUR ENVIRONMENTALLY-FRIENDLY FUTURE-PROOF RIDE-ON – 100 % ELECTRIC

Switching over to ecological mowing is a straightforward and safe process, perfectly tailored to your requirements and finances. Our qualified retailers will be delighted to help you find a suitable financial solution.

- Fewer maintenance intervals, thanks to its electric transmission
- Unrivalled power & mowing quality in heavy-load conditions
- Save time with optimum performance, thanks to wide mowing deck and high mowing speed
- Noise reduction
- Emission-free mowing
- High durability, no battery memory effect thanks to lithium-ion technology
- IP65 protection against moisture

maxRun® & SMART COCKPIT

- Innovative operating modes: Eco mode for saving battery power, intelligent mowing with autonomous speed control for maximum efficiency & reverse rotating blades to remove blockages from the mowing deck.
- Precise fault diagnostics and direct help in the SMART COCKPIT
- Customised user tips if problems arise
- Unrivalled mowing results
- Suitable for 4” to 7” smartphones
- Note when the light is on or the ignition is on**



MAXIMUM EFFICIENCY

- High speed for quick mowing
- Maximum endurance, thanks to considerable battery power
- Wide mowing deck for large areas
- Maximum power due to strong electric motors powering each cutting blade
- Efficient mowing thanks to MaxAirflow technology for optimised movement of grass into the grass collector
- Large 310 litre grass collector* for less frequent emptying

*Available for model T 3100 Li-95.5 HD and T 6200 Li-105.5 HD.
**See page 69 for explanation.

BATTERY TRACTORS

UNBEATABLE COMFORT

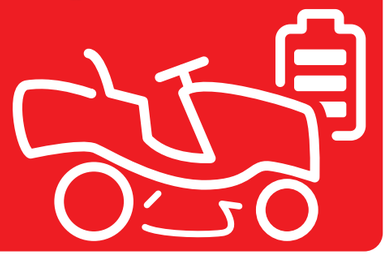





NEW



NEW



NEW

	T 3100 Li-95.5 HDS	T 3100 Li-95.5 HD	T 6200 Li-111.5 HDS
	PREMIUM pro e	PREMIUM pro e	PREMIUM pro e
Function	Side discharge & mulching	Rear discharge	Side discharge & mulching
Battery type	Li-ion 48 V	Li-ion 48 V	Li-ion 48 V
Power Pack 36 V	Optional	Optional	–
Battery	65 Ah / 3,100 Wh	65 Ah / 3,100 Wh	130 Ah / 6,200 Wh
Working width	95 cm (2 blades)	95 cm (2 blades)	110 cm (2 blades)
Area coverage up to*	8,500 m²	8,000 m²	12,000 m²
Max. operating time	90 min.	90 min.	150 minutes
Cutting height / height adjustment	3–9 cm / central, 7-stage	3–9 cm / central, 7-stage	3–9 cm / central, 7-stage
Transmission	infinitely variable electric	infinitely variable electric	infinitely variable electric
Grass collector volume / material	–	310 l / fabric with hard-top	–
Grass collector emptying **Optional extension** Art. no. 119 602	–	Telescopic lever / electrical	–
Operating modes (Cruise control, ECO mode & intelligent mowing)	✓	✓	✓
Bumper	✓	✓	✓
LED headlights	✓	✓	✓
maxRun® & smart Cockpit	Optional	Optional	✓
Tyre size front / rear (")	16 x 6.5-8 / 20 x 10.0-8	16 x 6.5 -8 / 20 x 10.0-8	16 x 6.5 -8 / 20 x 10.0-8
Included in delivery	Fast charger: 4.5 hrs / 15 A	Fast charger: 4.5 hrs / 15 A	Fast charger: 9.0 hrs / 15 A
EAN no.	400 371 806 5893	400 371 806 5909	400 371 806 5916
Art. no.	**127 771**	**127 772**	**127 773**

*In optimum mowing conditions

NEW



T 6200 Li-105.5 HD
PREMIUM pro e
Rear discharge
Li-ion 48 V
–
130 Ah / 6,200 Wh
105 cm (2 blades)
12,000 m²
150 minutes
3–9 cm / central, 7-stage
infinitely variable electric
310 l / fabric with hard-top
Telescopic lever / electrical
✓
✓
✓
✓
16 x 6.5 -8 / 20 x 10.0-8
Fast charger: 9.0 hrs / 15 A
400 371 806 5923
127 774



MOBILE, FLEXIBLE AND POWERFUL

With the AL-KO 36 V Mobile Power Pack, you can not only extend the range of compatible solo® by AL-KO Premium pro ride-on lawn tractors, but also remove the Mobile Power Pack from the lawn mower and use it for other applications. With the individually removable AL-KO 36 V batteries that can be charged in the Mobile Power Pack, you can easily supply all your other solo® by AL-KO and AL-KO 36 V tools with power.

With the built-in USB-C port, you can supply your USB-C compatible devices with mobile power. For example, you can conveniently charge your smartphones and tablets on the move.
With the optional 230 V inverter (Art. no. 127 778), you can also supply 230 V devices with mobile power, e.g. a hairdryer, a TV or a small fridge for camping, festivals, allotments and much more.

NEW



MOBILE POWER PACK AL-KO 36 V
EAN no. 400 371 806 5954
Art. no. 127 777

MOBILE POWER PACK AL-KO 36 V SET
Incl. 2 x 4 Ah and 2 x 8 Ah batteries
EAN no. 400 371 835 7066
Art. no. 127 782

POWER PACK INVERTER 230 V
EAN no. 400 371 806 5961
Art. no. 127 778

Image similar

PETROL TRACTORS

USED FOR YEARS
PROVEN FOR YEARS



POWERFUL AND DURABLE ENGINES

Our lawn tractors are driven by powerful and durable AL-KO Pro or Briggs & Stratton engines. Two-cylinder engines are robust, but run smoothly, which means fewer vibrations for the driver. The Briggs & Stratton Intek series engines form part of the Premium class for petrol tractors. Thanks to cast-iron cylinder liners, pressure lubrication with oil filter, anti-vibration system and OHV technology, the series is extremely durable and reliable.



SMOOTH INFINTELY VARIABLE HYDRO DRIVE

As one of their key features, our tractors include a high-quality Hydro-Gear® transmission and thus can ensure the very best driving experience in even the most difficult situations. The hydrostatic transmission from Hydro-Gear® was developed, tested and built to ensure reliable, quiet and yet extremely precise performance for many years.





A REAL ALL-ROUNDER

Tall grass, wet or even icy ground - no problem for our petrol ride on lawn tractors, thanks to their versatility and our **PREMIUM** *pro* special tractors. Choose the right tractor for your needs from our wide range of side and rear discharge lawn tractors. Our wide range of accessories makes the lawn tractors even more versatile. Hop on your tractor in winter to clear the snow or use it in summer to move your gardening tools with our Combi trailer. Gardening gets even smarter with the Smart Cockpit as an option on your **PREMIUM** *pro* ride-on lawn tractor.

OUR SERVICE PROMISE TO YOU

Our **petrol ride-on lawn tractors** are reliable appliances, providing unrivalled mowing and grass collection and are the perfect addition to your large garden. The components of petrol ride-on lawn tractors have been in use for years and have stood the test of time. You can choose from two different categories: Our **COMFORT** *pro* ride-on lawn tractors are the entry-level range and impress users with their simple operation as well as their excellent value for money.

The **PREMIUM** *pro* lawn tractors promise maximum performance and maximum comfort. They can master any challenge in your garden. Regardless of whether the grass is long or the ground is still wet, we've got the right Premium ride-on lawn tractor for the job. All our ride-on lawn tractors always live up to our quality promise "Engineered in Germany & Made in Austria".

SERVICE FRIENDLY DESIGN

Regular maintaining your petrol lawn tractor will extend its service life. Benefit from the easy-to-service design of our lawn tractors: The mowing deck, for example,can be installed and removed in no time at all, making conversion from summer to winter operation quick and easy. The innovative Smart Cockpit of our **PREMIUM** *pro* petrol lawn tractors assists you with a service log, similar to those found on your vehicle. You will receive reminders and in-depth explanations directly on your smartphone once a service is due.



EASY pro

PETROL TRACTORS











SOLO BY AL-KO EASY PRO – POWERFUL, MANOEUVRABLE AND COMFORTABLE

The EASY pro lawn tractors stand for reliable performance and maximum user-friendliness. The **AL-KO Pro 450 engine** provides powerful drive and smooth running, ideal for medium to large areas. The **foot-operated hydrostatic transmission** lets you enjoy smooth, comfortable driving without shifting gears. The **box lever can be mounted either on the right or left**, allowing flexible handling according to your preferences.

Thanks to the **particularly small turning circle**, the tractor remains surprisingly manoeuvrable even in tight spaces. A lawn tractor that perfectly combines efficiency, precision and riding comfort.

	T 14-86.6 HD-A	T 14-92.6 HDS-A
	EASY pro	EASY pro
Function	Rear discharge & mulching (optional)	Side discharge & mulching (optional)
Working width	86 cm (2 blades)	92 cm (2 blades)
Area coverage up to*	4,500 m²	4,500 m²
Engine	AL-KO PRO 450	AL-KO PRO 450
Power	452 ccm / 7.7 KW / 2,800 rpm	452 ccm / 7.7 KW / 2,600 rpm
Transmission	Foot operated hydrostatic (T2)	Foot operated hydrostatic (T2)
Blade engagement	Electromagnetic	Electromagnetic
Tyre size front / rear (")	15" x 6-6 / 18" x 8.5-8	15" x 6-6 / 18" x 8.5-8
Cutting height / height adjustment	30–90 mm / 7-stage	30–90 mm / 7-stage
Headlights	LED	LED
Grass catcher volume / material	250 l	–
Max. speed	8.9 km/h	8.9 km/h
Reverse speed approx.	4.0 km/h	4.5 km/h
EAN no.	400 371 806 7187	400 371 806 7194
Art. no.	**127 818**	**127 819**

*In optimum mowing conditions

MULCHING WEDGE
For model 127 818
EAN no. 400 371 806 7729
Art. no. 127 841

DEFLECTOR
For model 127 818
EAN no. 400 371 806 7736
Art. no. 127 842

TOW HITCH
For model 127 819 / 127 818
EAN no. 400 371 806 7743
Art. no. 127 843

COMFORT pro

PETROL TRACTORS



THE ADVANCED GENERATION OF OUR COMFORT pro PETROL LAWN TRACTORS

Our COMFORT pro petrol lawn tractors have been in use for years. We listen to our customers' thoughts and continually improve our mowers. This has lead to the engine cover being updated, with the intensity of the headlights increased tenfold. In addition to the new eye-catching look of the COMFORT pro lawn tractors, we have also implemented technical improvements to the grass collector. The improved box frame is the product of a wide variety of feedback from our long-term customers. Take a look at the new generation of our COMFORT pro lawn tractors for yourself.



EXTREMELY USER FRIENDLY

Our COMFORT pro lawn tractors stand out with their high level of user friendliness. Durable components such as the foot operated-hydrostatic transmission and electromagnetic blade brake clutch are used, which are able to engage and disengage the blades at any time without having to stop the engine. Indeed, using the lawn tractor is a breeze. Enjoy further benefits, such as the low access and extra long legroom. The controls can be easily accessed from the seat and feature an even more ergonomic design in the new generation.



PRECISE STEERING AND WIDE WHEELS FOR OPTIMUM RIDE COMFORT

Our ride-on lawn tractors are very easy manoeuvre, thanks to precise steering components. The large wheels also ensure good traction for your lawn tractor and help to protect the lawn. The rule here is: the bigger, the better. Our COMFORT pro lawn tractors have comparably larger wheels when compared to competing products. Not to mention our PREMIUM pro lawn tractors' wheels are even bigger.

INNOVATIVE DESIGN Ⓓ

We have revolutionised the design of our COMFORT pro lawn tractors and adapted it to our solo® by AL-KO design language. We have drawn on design elements from the automotive industry, such as long headlight lenses and large radiator grilles. In comparison to the previous generation, the intensity of the headlights has been increased tenfold.



IMPROVED BOX FRAME INCL. NEW PIVOT POINT

We have increased the volume of the grass collector on our COMFORT pro lawn tractors to 250 litres. Thanks to the new pivot point, even less force is required to empty the larger grass collector. This pivot point is possible due to the improved box frame which also has an additional locking mechanism. This lock perfectly secures the box in the supporting arms, preventing it from accidentally falling out to the side. Attachment and removal of the collector box has also been considerably improved during this change.



COMFORT *pro*

PETROL TRACTORS





SIDE DISCHARGE

T 15-93.3 HDS-A



SIDE DISCHARGE

T 18-111.4 HDS-A V2



REAR DISCHARGE

T 15-93.3 HD-A



REAR DISCHARGE

T 15-103.3 HD-A



REAR DISCHARGE

T 18-93.4 HD-A V2



REAR DISCHARGE

T 18-103.4 HD-A V2

	COMFORT *pro*	COMFORT *pro*	COMFORT *pro*
Working width	95 cm (2 blades)	110 cm (2 blades)	93 cm (2 blades)
Area coverage up to	7,000 m²	10,000 m²	6,000 m²
Engine	AL-KO Pro 450	AL-KO Pro 600 V2	AL-KO Pro 450
Power	452 ccm / 8.5 kW / 2,900 rpm	586 ccm / 9.6 kW / 2,700 rpm	452 ccm / 7.7 kW / 2,600 rpm
Number of cylinders	1 cylinder	2 cylinders	1 cylinder
Transmission	Foot operated hydrostatic (T2)	Foot operated hydrostatic (T3)	Foot operated hydrostatic (T3)
Max. speed	8 km/h	9 km/h	9 km/h
Grass collector volume / material	–	–	250 l / fabric with hard-top
Grass collector emptying	–	–	Telescopic lever
MAX AIRFLOW technology	–	–	✓
Cutting height / height adjustment	3–8 cm / central, 6-stage	3–8 cm / central, 6-stage	3–8 cm / central, 6-stage
Blade engagement	Electromagnetic	Electromagnetic	Electromagnetic
Tyre size front / rear (")	15 x 6.0-6 / 18 x 8.5-8	15 x 6.0-6 / 18 x 8.5-8	15 x 6.0-6 / 18 x 8.5-8
Mulching function	✓	✓	Optional (art. no. 118 885)
Bumper	Optional: Bumper (art. no. 119 658) Optional: Pro bumper (art. no. 127 731)	Optional: Bumper (art. no. 119 658) Optional: Pro bumper (art. no. 127 731)	Optional: Bumper (art. no. 119 658) Optional: Pro bumper (art. no. 127 731)
LED headlights	Retrofitting kit for LED lights (Art. no. 119 832)	Retrofitting kit for LED lights (Art. no. 119 832)	Retrofitting kit for LED lights (Art. no. 119 832)
Length x width x height approx.	190 x 102 x 114 cm	190 x 117 x 114 cm	239 x 102 x 114 cm
EAN no.	400 371 806 4032	400 371 806 4919	400 371 806 4056
Art. no.	**127 685**	**127 724**	**127 687**

COMFORT *pro*	COMFORT *pro*	COMFORT *pro*
103 cm (2 blades)	93 cm (2 blades)	103 cm (2 blades)
7,000 m²	6,000 m²	7,000 m²
AL-KO Pro 450	AL-KO Pro 600 V2	AL-KO Pro 600 V2
452 ccm / 7.5 kW / 2,450 rpm	586 ccm / 9.4 kW / 2,600 rpm	586 ccm / 9.0 kW / 2,450 rpm
1 cylinder	2 cylinders	2 cylinders
Foot operated hydrostatic (T3)	Foot operated hydrostatic (T3)	Foot operated hydrostatic (T3)
9 km/h	9 km/h	9 km/h
250 l / fabric with hard-top	250 l / fabric with hard-top	250 l / fabric with hard-top
Telescopic lever	Telescopic lever	Telescopic lever
✓	✓	✓
3–8 cm / central, 6-stage	3–8 cm / central, 6-stage	3–8 cm / central, 6-stage
Electromagnetic	Electromagnetic	Electromagnetic
15 x 6.0-6 / 18 x 8.5-8	15 x 6.0-6 / 18 x 8.5-8	15 x 6.0-6 / 18 x 8.5-8
Optional (art. no. 119 656)	Optional (art. no. 118 885)	Optional (art. no. 119 656)
Optional: Bumper (art. no. 119 658) Optional: Pro bumper (art. no. 127 731)	Optional: Bumper (art. no. 119 658) Optional: Pro bumper (art. no. 127 731)	Optional: Bumper (art. no. 119 658) Optional: Pro bumper (art. no. 127 731)
Retrofitting kit for LED lights (Art. no. 119 832)	Retrofitting kit for LED lights (Art. no. 119 832)	Retrofitting kit for LED lights (Art. no. 119 832)
239 x 110 x 114 cm	239 x 102 x 114 cm	239 x 110 x 114 cm
400 371 806 4063	400 371 806 4926	400 371 806 4933
127 688	**127 725**	**127 726**

PREMIUM *pro*

THE MOST POWERFUL WORKHORSES IN THE RANGE



THE NEW GENERATION OF OUR PREMIUM PRO PETROL LAWN TRACTORS

Our **PREMIUM** *pro* petrol lawn tractors have been proven all-rounders for years and the new design also makes them real eye-catchers. These new machines let you experience the combination of unrivalled performance, maximum efficiency, maximum comfort and utmost versatility. In addition to their new look and feel, the new workhorses also prove impressive with new technical improvements that we have implemented based on feedback from our long-term customers.

You'll be mowing to impeccable standards, overcoming almost anything in your way whether you need to cover large areas or high grass or tackle steep slopes. The Smart Cockpit provides you with information about all the key aspects of the mower both during and after mowing. Why not give one of our smart and innovative **PREMIUM** *pro* petrol lawn tractors a whirl?



UNRIVALLED PERFORMANCE

PREMIUM *pro* tractors are driven by extremely powerful engines, enabling you to overcome great challenges. Even thick grass shouldn't pose any issues. The G700 transmission guarantees the best performance over a long period of time, owing to its robust cast aluminium housing and improved internal components, as well as solid 1" wheel shafts. The external oil filter makes the unit easy to maintain, while the integrated pump ensures that the main elements of the gearbox hydraulic system are always supplied with sufficient oil.

MAXIMUM EFFICIENCY

The efficiency of our **PREMIUM** *pro* lawn tractors has been maximised once again thanks to the 2 km/h increase in speed (up to 13 km/h), the wide mowing deck (up to 125 cm) and MaxAirflow technology for the best way to transport into the high-volume grass collector (310 litres). Perfectly combining these features makes our **PREMIUM** *pro* tractors the most efficient on the market. A larger grass collector means you make fewer trips to empty it, leaving you with more time to enjoy the finer things in your garden.



MAXIMUM ERGONOMICS

In addition to outstanding efficiency, our **PREMIUM** *pro* lawn tractors have also maximised ergonomics since 2024. The Premium seat has armrests, making long periods of work even more comfortable. For more reliable and faster adjustment of the mowing height, the height adjustment of the mowing deck is provided with a memory function that maintains the preferred cutting height. The pedals of **PREMIUM** *pro* lawn tractors are arranged parallel to each other, in a similar layout to your car, meaning you are able to respond quickly to any situation. Empty the large grass collector with the optionally available electric emptying kit, which enables you to open the grass collector with a single press of a switch.

UTMOST VERSATILITY

You are particularly versatile with our wide range of accessories, which you can use as you wish on the **PREMIUM** *pro* lawn tractors. With this in mind, take a look at our "**PREMIUM** *pro* exclusive" accessory solutions. In winter, in high grass, steep terrain and in tricky situations, users of the **PREMIUM** *pro* lawn tractor are ideally supported. Our wide range of accessories offers exactly what you need for your lawn tractor, precisely tailored to your demands and applications. The option of retrofitting all our **PREMIUM** *pro* lawn tractors with the Smart Cockpit is a rather smart choice.



PREMIUM *pro*

engineered in **GERMANY**

made in **AUSTRIA**





INCREASED EFFICIENCY

DESIGN Ⓓ

Discover our new design that offers the tractor a whole new visibility and dimension. The LED system is rather striking with its bright LED strips as permanent daytime running lights. The design incorporates our AL-KO design language and provides **PREMIUM** *pro* and **COMFORT** *pro* tractors with a uniform look. With its impressive dimensions, the new **PREMIUM** *pro* tractor looks like the big brother among lawn tractors. By further developing the design, we are also raising the competitive edge of our **PREMIUM** *pro* tractors. This new design sets the standard for future developments in the field of ride-on lawn tractors.

GERMAN DESIGN AWARD WINNER 2024



ENHANCED ERGONOMICS

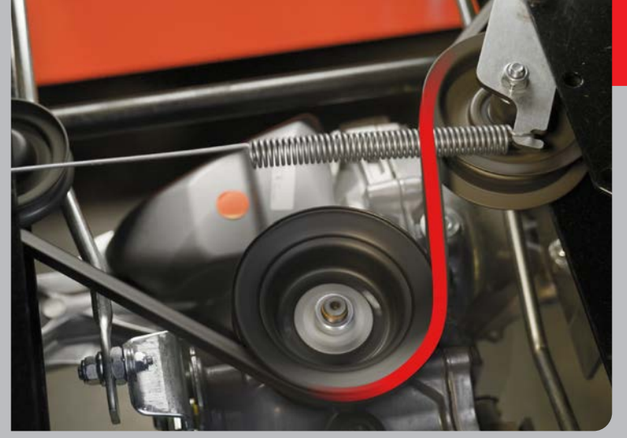

ENHANCED SPEED

Thanks to our optimised drive system, you will also benefit from improved performance and higher speeds. By means of extensive testing, we were able to determine an optimised gearbox transmission ratio, which enables a higher speed and therefore also increased power. Thanks to the optimised belt guide, this increased power is efficiently transmitted to the rear axle. This not only results in faster driving, but also faster mowing – developed with maximum efficiency in mind.

IMPROVED BELT GUIDE

Based on invaluable customer feedback, we have been able to optimise the belt drive of our tractors. Previously, the drive was occasionally weakened during heavy use. We have now increased the wrap angle of the transmission pulley by 40°. To do so, we have developed a new belt that can be loaded on both sides, an additional pulley and a spring that is tailored to the other components. The improved belt guidance refines the drive and minimises losses. For reliable tractor performance, even in harsh conditions.





HEIGHT ADJUSTMENT MEMORY FUNCTION

Make your work easier with our memory function, which allows you to set the cutting height in a more reliable and faster manner. Save your preferred cutting height, ensuring you don't accidentally work at a different height. You'll love this feature, especially when you've plenty of work to tackle in the garden. The inspection window means you can always keep an eye on the cutting height. The audible signal also provides additional support while performing the adjustment. In contrast to our competitors, who only occasionally have such a solution in their product range and most of them involve complex adjustment, we offer convenient operation with a single handle.

ARMRESTS

Discover our armrests – our response to the frequent customer request for comfort when working for longer periods, especially on large areas of land. Our armrests are height adjustable and enable each user to individually adjust them to their own requirements. The armrests can also be retrofitted on older seats, therefore expanding our range of accessories. We have even developed our own armrests for retrofitting our COMFORT pro tractors. It goes without saying that we have rigorously tested the stability – each armrest was loaded with 100 kg and was able to withstand this load.

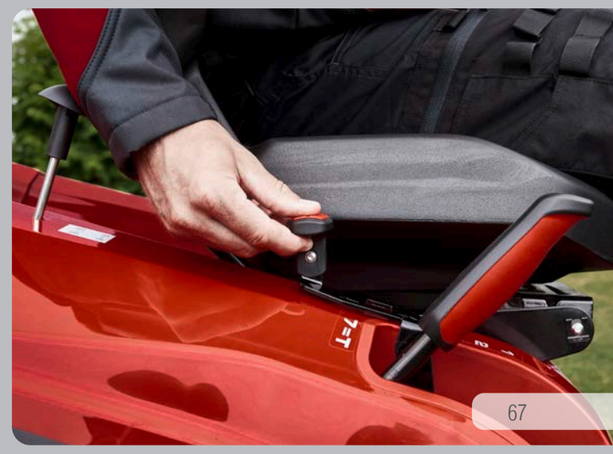

PREMIUM *pro*

SPECIAL TRACTORS



SCAN THE QR CODE TO HEAD TO THE TRACTOR WITH DIFFERENTIAL LOCK

T 22-105.4 HDD-A V2
Art. no. 127 708



DIFFERENTIAL LOCK

THE SOLUTION FOR EVERY SURFACE

SAFE WORKING ON SLOPES AND WET, LOOSE GROUND

Working in winter is made effortless by locking the rear axle.

MAXIMUM TRACTION AND OPTIMAL BALANCE

If a rear wheel slips, the differential lock ensures that the rear axle is actively locked to enable better traction and a safer way of working.
The differential lock is unlocked automatically.

SNOW CHAINS ARE ESSENTIAL IN WINTER

HIGH GRASS MOWER DECK

SCRUB OR HIGH GRASS? OUR HIGH GRASS MOWING DECK HANDLES IT ALL!

ROBUST, ASYNCHRONOUS BLADE SYSTEM WITH 3 BLADES

The high grass mower deck tackles virtually any grass, and armed with 5 mm thick blades, it is unstoppable even on difficult terrain. The 4 contact wheels on the mowing deck ensure the right balance on uneven terrain.

CHEVRON TYRES AS STANDARD FOR OPTIMUM TRACTION

The chevron profile rear tyres are fitted as standard, and increase traction on difficult terrain and high grass.

BIODIVERSITY - LESS MOWING, MORE BEES AND INSECTS





T 22-110.4 HDH-A V2
Art. no. 127 709

SCAN THE QR CODE TO HEAD TO THE HIGH GRASS TRACTOR

SMART COCKPIT

The Smart Cockpit is revolutionising lawn mowing, making the process more efficient and simple. Download the AL-KO inTOUCH® App, place your smartphone in the sturdy holder (suitable for all 4" to 7" devices), connect your lawn tractor via Bluetooth® and then all the benefits of smart lawn tractors can be utilised.

For support in no time at all, simply contact selected retailers via the AL-KO inTOUCH® App on the Smart Cockpit, who will be able to swiftly resolve the issue. The Smart Cockpit is also home to useful product videos, lists with accessories and spare parts, as well as digital manuals.



RETROFIT KIT FOR ALL PREMIUM *pro* TRACTORS FROM 2014

Have you ever forgotten to switch off the lights or the ignition of your lawn tractor and the next time you tried to start it, the battery was flat? The solo® by AL-KO PREMIUM *pro* lawn tractors with Smart Cockpit ensure this won't happen again. As soon as you remove the smartphone with the inTOUCH® app installed and the Smart Cockpit activated from the holder and walk away from the machine, you will receive a push notification if you have forgotten to switch off the lights or the ignition. Smart, isn't it?

SCAN QR CODE TO GO TO SMART MOWERS

AS YOU MOW

The Smart Cockpit offers many benefits when operated from the lawn tractor. Displayed details are:

- MOWING EFFICIENCY, for the perfect cut
- MAXIMUM MOWING TIME REMAINING, which is calculated based on fuel consumption
- SPEED, which lights up red for low mowing efficiency in order to prevent any blockages
- SMART HELP that offers a wealth of useful information and functions via the inTOUCH® app
- TRACTOR INCLINE, as a safety recommendation for steep slopes
- OPERATING HOURS, to make servicing the machine much easier

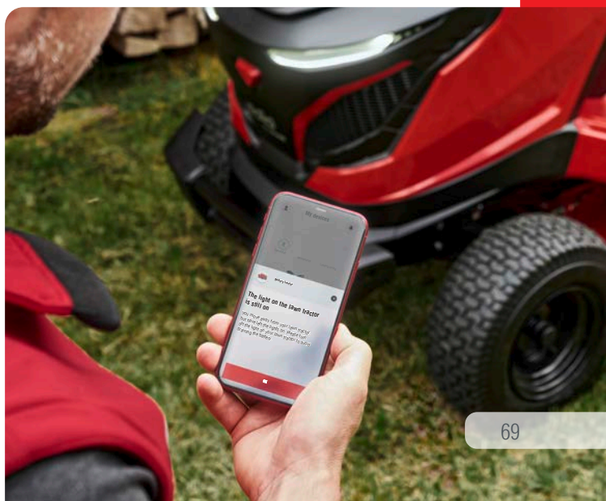

PREMIUM *pro*

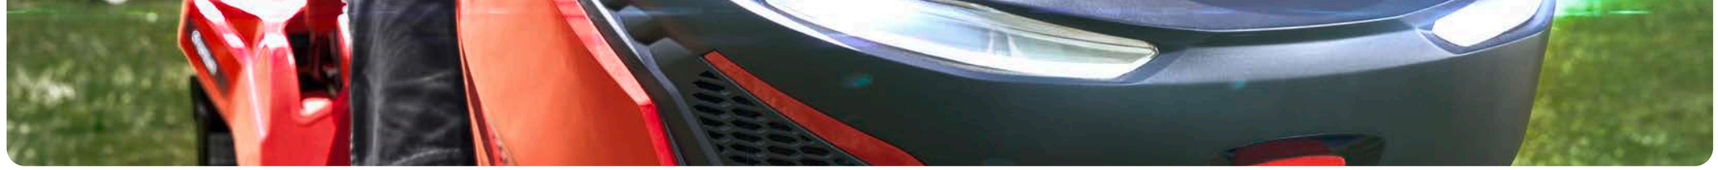



SIDE DISCHARGE

T 22-111.4 HDS-A V2



REAR DISCHARGE

T 15-95.4 HD-A



REAR DISCHARGE

T 18-95.4 HD V2



REAR DISCHARGE

T 18-105.4 HD V2

	PREMIUM *pro*	PREMIUM *pro*	PREMIUM *pro*	PREMIUM *pro*
Working width	110 cm (2 blades)	95 cm (2 blades)	95 cm (2 blades)	105 cm (2 blades)
Area coverage up to	11,000 m²	7,000 m²	7,000 m²	8,000 m²
Engine	AL-KO Pro 700 V2	AL-KO Pro 450	B&S Intek 7160 V2	B&S Intek 7160 V2
Power	708 ccm / 13 kW / 2,700 rpm	452 ccm / 7.7 kW / 2,600 rpm	656 ccm / 9.6 kW / 2,600 rpm	656 ccm / 9.1 kW / 2,450 rpm
Number of cylinders	2 cylinders	1 cylinder	2 cylinders	2 cylinders
Transmission	Foot operated hydrostatic (T3)	Foot operated hydrostatic (T3)	Foot operated hydrostatic (T3)	Foot operated hydrostatic (T3)
Max. speed	11 km/h	11 km/h	11 km/h	11 km/h
Improved drive system	✓	✓	✓	✓
Grass collector volume / material	–	310 l / fabric with hard-top	310 l / fabric with hard-top	310 l / fabric with hard-top
Grass collector emptying / optional extension art. no. 119 602	–	Telescopic lever / electrical	Telescopic lever / electrical	Telescopic lever / electrical
MAX AIRFLOW technology	–	✓	✓	✓
Cutting height / height adjustment	3–9 cm / central 7-stage	3–9 cm / central 7-stage	3–9 cm / central 7-stage	3–9 cm / central 7-stage
Height adjustment memory function	✓	✓	✓	✓
Blade engagement	Electromagnetic	Electromagnetic	Electromagnetic	Electromagnetic
Tyre size front / rear (")	16 x 6.5 - 8 / 20 x 10.0 - 8	15 x 6.0 - 6 / 20 x 10.0 - 8	15 x 6.0 - 6 / 20 x 10.0 - 8	16 x 6.5 - 8 / 20 x 10.0 - 8
Armrests Art. no. 127 730	Optional	Optional	Optional	Optional
smart Cockpit Art. no. 127 655	Optional	Optional	Optional	Optional
Cruise control Art. no. 127 729	Optional	Optional	Optional	Optional
Bumper Art. no. 127 731	Optional	Optional	Optional	Optional
Cast axle	–	–	–	–
Mulching function Art. no. 118 885	✓	Optional	✓	✓
LED headlights	✓	✓	✓	✓
Length x width x height approx.	200 x 117 x 117 cm	251 x 102 x 117 cm	251 x 102 x 117 cm	251 x 110 x 117 cm
EAN no.	400 371 806 4940	400 371 806 4766	400 371 806 4773	400 371 806 4780
Art. no.	**127 727**	**127 705**	**127 706**	**127 707**

PREMIUM *pro*

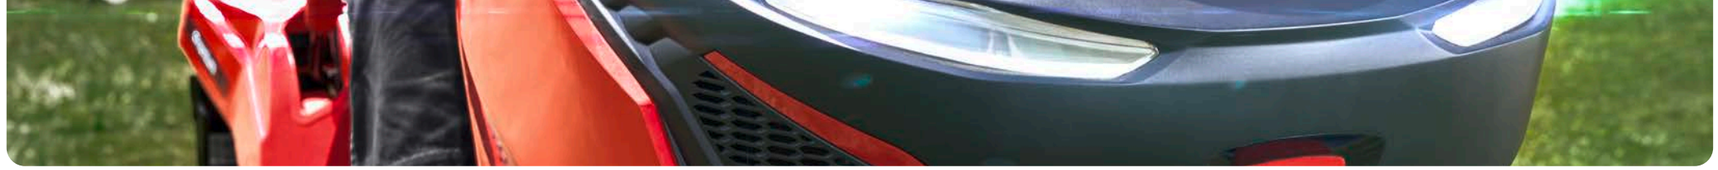











DIFFERENTIAL LOCK

HIGH GRASS MOWER

HIGH GRASS MOWER + DIFFERENTIAL LOCK

SMART COCKPIT

125 CM MOWING DECK

	T 22-105.4 HDD-A V2	T 22-110.4 HDH-A V2	T 22-110.6 HDDH-A V2	T 22-105.4 HD V2 SD	T 24-125.4 HD V2
	PREMIUM *pro*	PREMIUM *pro*	PREMIUM *pro*	PREMIUM *pro*	PREMIUM *pro*
Working width	105 cm (2 blades)	110 cm (3 blades)	110 cm (3 blades)	105 cm (2 blades)	125 cm (2 blades, synchronous)
Area coverage up to	8,000 m²	9,000 m²	9,000 m²	8,000 m²	10,000 m²
Engine	AL-KO Pro 700 V2	AL-KO Pro 700 V2	AL-KO Pro 700 V2	B&S Intek 7220 V2	B&S Intek 8240 V2
Power	708 ccm / 12.2 kW / 2,450 rpm	708 ccm / 13.4 kW / 2,900 rpm	708 ccm / 13.4 kW / 2,900 rpm	656 ccm / 11.7 kW / 2,450 rpm	724 ccm / 14.4 kW / 2,900 rpm
Number of cylinders	2 cylinders	2 cylinders	2 cylinders	2 cylinders	2 cylinders
Transmission	Foot operated hydrostatic (T3), diff. lock	Foot operated hydrostatic (T3)	Foot operated hydrostat (T3), differential lock	Foot operated hydrostatic (G700)	Foot operated hydrostatic (G700)
Max. speed	11 km/h	11 km/h	11 km/h	13 km/h	13 km/h
Improved drive system	✓	✓	✓	✓	✓
Grass collector volume / material	310 l / fabric with hard-top	–	–	310 l / fabric with hard-top	310 l / fabric with hard-top
Grass collector emptying / optional extension Art. no. 119 602	Telescopic lever / electrical	–	–	Telescopic lever / electrical	Telescopic lever / electrical
MAX AIRFLOW technology	✓	–	–	✓	✓
Cutting height / height adjustment	3–9 cm / central 7-stage	3–9 cm / central 7-stage	3–9 cm / central 7-stage	3–9 cm / central, 7-stage	3–9 cm / central 7-stage
Height adjustment memory function	✓	✓	✓	✓	✓
Blade engagement	Electromagnetic	Electromagnetic	Electromagnetic	Electromagnetic	Electromagnetic
Tyre size front / rear (")	16 x 6.5–8 / 20 x 10.0–8	16 x 6.5–8 / 20 x 10.0–8	16 x 6.5–8 / 20 x 10.0–8	16 x 6.5–8 / 23 x 10.5–12	16 x 6.5–8 / 23 x 10.5–12
Armrests Art. no. 127 730	Optional	Optional	✓	Optional	Optional
smart Cockpit Art. no. 127 655	Optional	Optional	Optional	✓	Optional
Cruise control Art. no. 127 729	Optional	Optional	Optional	✓	✓
Bumper Art. no. 127 731	✓	✓	✓	✓	✓
Cast axle	–	–	–	✓	✓
Mulching function Art. no. 118 885	✓	–	–	✓	✓
LED headlights	✓	✓	✓	✓	✓
Length x width x height approx.	251 x 110 x 117 cm	200 x 114 x 117 cm	200 x 114 x 117 cm	256 x 110 x 120 cm	256 x 130 x 120 cm
EAN no.	400 371 806 4797	400 371 806 4803	400 371 835 7233	400 371 806 4810	400 371 806 4827
Art. no.	**127 708**	**127 709**	**127 836**	**127 710**	**127 711**

TRACTOR ACCESSORIES



BUMPER PRO
Premium tractors from 2013
Comfort tractors from 2017
EAN no. 400 371 806 4988
Art. no. 127 731



BUMPER
For all Comfort and Premium tractors
EAN no. 400 371 835 3464
Art. no. 119 658



ARMRESTS
Premium tractors from 2013
Comfort tractors from 2017

COMFORT *pro*
EAN no. 400 371 806 4995
Art. no. 127 732

PREMIUM *pro*
EAN no. 400 371 806 4971
Art. no. 127 730



STUDDED TYRES Set of 2 (for rear axle)

20"
EAN no. 400 371 806 0911
Art. no. 127 577

23”
EAN no. 400 371 806 0928
Art. no. 127 578



SNOW CHAINS Set of 2 (for rear axle)

18" EAN no. 400 371 803 4257
Art. no. 112 339

20" EAN no. 400 371 805 5306
Art. no. 127 333

23" EAN no. 400 371 804 8643
Art. no. 113 137



SNOWPLOUGH
Incl. mounting frame, 125 cm working width, 5-stage adjustment
EAN no. 400 371 835 2924
Art. no. 119 600



MULCHING KEY 86 cm
EAN no. 400 371 806 7729
Art. no. 127 841

MULCHING KEY 93/95 cm
EAN no. 400 371 834 5643
Art. no. 118 885

MULCHING KEY 103/105 cm
EAN no. 400 371 835 3440
Art. no. 119 656



DEFLECTOR

EASY *pro*
EAN no. 400 371 806 7736
Art. no. 127 842

COMFORT *pro*
EAN no. 400 371 805 9281
Art. no. 127 488

PREMIUM *pro*
EAN no. 400 371 835 2986
Art. no. 119 606



HIGH GRASS CUTTING DECK
Working width 110 cm
4 contact wheels for unevenness
EAN no. 400 371 806 0904
Art. no. 127 576



STRAIGHT LOADING RAMP
Made of aluminium, set of 2,
payload: 400 kg, length 2 m
EAN no. 400 371 806 1949
Art. no. 113 861



CURVED LOADING RAMP
Made of aluminium, set of 2,
payload: 400 kg, length 2 m
EAN no. 400 371 806 2038
Art. no. 113 862



TRACTOR ACCESSORIES

PREMIUM pro exclusive



MEMORY FUNCTION
Premium tractors from 2013
EAN no. 400 371 806 4957
Art. no. 127 740



CRUISE CONTROL
Premium tractors from 2013
EAN no. 400 371 806 4964
Art. no. 127 729



ELECTRIC GRASS COLLECTOR EMPTYING
Premium tractors from 2013
with grass collector
EAN no. 400 371 835 2948
Art. no. 119 602



RETROFITTING KIT FOR SMART COCKPIT
Premium tractors from 2013
EAN no. 400 371 806 3332
Art. no. 127 655

+SMART INDUCTIVE CHARGING
EAN no. 400 371 806 3349 / **Art. no. 127 656**



SPREADER SP 60*
Capacity: 56 l
Spread range: 2–5 m
EAN no. 400 371 806 1932
Art. no. 113 874



COMBI TRAILER CT 400*
max. load weight (level): 400 kg
max. load weight (slope): 200 kg
EAN no. 400 371 806 1895
Art. no. 113 870



LAWN ROLLER GW 100*
Working width: 98 mm
Working weight: 140 kg (water filling),
235 kg (sand filling)
EAN no. 576 972 033 0617
Art. no. 130 539

*Trailer hitch required.







TOW HITCH

For models **EASY** *pro*
EAN no. 400 371 806 7743
Art. no. 127 843

For models **COMFORT** *pro*
EAN no. 400 371 835 5109
Art. no. 119 831

For **PREMIUM** *pro* models
EAN no. 400 371 835 3006
Art. no. 119 608

ADVANTAGE KITS

Comprising **an accessory** and **a tow bar**



COMFORT *pro*

Combi Trailer Set Comfort
EAN no. 400 371 806 4131
Art. no. 113 877

Spreader SP 60 Set Comfort
EAN no. 400 371 806 4155
Art. no. 113 879

Lawn roller GW 100 Set Comfort
EAN no. 400 371 806 4179
Art. no. 113 881

PREMIUM *pro*

Combi Trailer Set Premium
EAN no. 400 371 806 4148
Art. no. 113 878

Spreader SP 60 Set Premium
EAN no. 400 371 806 4162
Art. no. 113 880

Lawn roller GW 100 Set Premium
EAN no. 400 371 806 4186
Art. no. 113 882

SCARIFIERS

PERFECT PREPARATION FOR YOUR SUMMER OUTDOORS











DURABLE AND ROBUST

The sturdy and high-quality chassis is made of premium steel and guarantees a long service life, unaffected by bumps and scuffs.

LIGHTWEIGHT ON THE MOVE

The ball-bearing mounted wheels with rubber treads ensure simple driving and steering even in difficult conditions.

ALWAYS THE RIGHT WORKING DEPTH

The practical rotary button allows you to conveniently and precisely adjust the working depth to your requirements. Thanks to the specially designed transport lever, the scarifying roller can be simply lowered and raised from the handlebar (transport position).



	516	518
	COMFORT pro	COMFORT pro
Engine	Electric, 1,800 W	Petrol, Honda GP 160 163 ccm / 3.6 kW / 3,200 rpm
Working width	36 cm	36 cm
Working depth	0–25 mm	0–25 mm
Blade shaft	15 steel blades	15 steel blades
Ball-bearing mounted wheels	✓	✓
Collapsible handlebar	✓	✓
Included in delivery	Collection bag	Collection bag
Weight	29 kg	35 kg
EAN no.	400 371 805 5900	400 371 805 5917
Art. no.	**127 374**	**127 375**



FRESH AIR FOR YOUR LAWN

In addition to regular mulching, lawns should be scarified in the spring and/or autumn to allow the lawn to breathe. The steel blades of the scarifier penetrate the turf and remove lawn thatch, moss and plant remains. After scarifying, the area should be fertilised directly, re-seeded and thoroughly watered.

BATTERY SCARIFIERS

PERFECT PREPARATION FOR YOUR LAWN

AL-KO 36 V





AERATOR ROLLER
optional accessories
EAN no. 400 371 806 5565
Art. no. 114 066



3856 Li

COMFORT pro

Working width	38 cm
Working depth	+6 to -14 mm
Battery type	AL-KO 36 V
Power	Li-ion 36 V 2.5 Ah / 4.0 Ah / 5.0 Ah / 8.0 Ah
Blade shaft	14 steel blades
Wheels	205 / 140 mm, rubberised
Collapsible handlebar	✓
Included in delivery	Collection bag, 50 l
Approx. weight	12.2 kg
WITHOUT BATTERY OR CHARGER – **EAN no.**	400 371 806 6876
WITHOUT BATTERY OR CHARGER – **Art. no.**	**127 825**
SET INCL. 1x BATTERY 4 Ah + CHARGER 3 A – **EAN no.**	400 371 806 7866
SET INCL. 1x BATTERY 4 Ah + CHARGER 3 A – **Art. no.**	**127 852**

PETROL SCARIFIERS

GIVE YOUR LAWN AIR TO BREATHE



4076 P

COMFORT pro

Working width	40 cm
Working depth	+5 to -17 mm
Engine	Petrol, Loncin
Power	196 ccm / 4.0 kW / 3,600 rpm
Blade shaft	32 steel blades, oscillating
Chassis	Steel plate
Ball-bearing mounted wheels	✓
Collapsible handlebar	✓
Included in delivery	Collection bag, 50 l
Approx. weight	45 kg
EAN no.	400 371 806 6487
Art. no.	**127 722**

BRUSHCUTTERS & TRIMMERS





CUT THROUGH THE OVERGROWTH WITH POWER LIMITLESS TRIMMING

Whether cleaning out the garden, or professional property and landscape maintenance – with **brushcutters** from solo® by AL-KO and the interchangeable cutting tools and corresponding motor power results in a wide range of possible applications. And with various handle and belt variants, the user always has everything under control.

EASY START SYSTEM PRO

The “next generation” of solo® by AL-KO petrol brushcutters defines innovative technical standards right from the start: For all seven models, the starting process has been simplified and reduced to just a few steps. The standard position of the Ready to Start switch is always the ON position and there is no need to operate an additional lever for half-throttle assistance. The engine starts following a few pulls on the starter cord. The Easy Start System Pro (126 and 130 model), ensures smooth starting, with very little exertion.

FAST AND EASY LINE HEAD AND ANTI-VIBRATION SYSTEM PRO

The Fast and Easy brushcutter head ensures simple threading and winding of the cutting line without opening the housing, for all battery and petrol brush cutters.
What’s more, the most powerful model, the 151 B, is fitted with the professional anti-vibration system Pro, which enables low-vibration operation.

MODERN 2-STROKE ENGINES AND 36 V BATTERY UNITS

Whether clearing your garden at home or for landscape or forest management – the battery and petrol brushcutters from solo® by AL-KO ensure limitless trimming in the semi-professional field. The state-of-the-art brushcutters are setting high standards when it comes to technology and cost efficiency. They are easy to start, offer a high power-to-weight ratio and are easy to refill with nylon line.



LOW-EMISSION AIR COOLED ENGINES

The 130, 140 and 151 models of solo® by AL-KO petrol brushcutters also feature low-emission, and thus more environmentally-friendly, air cooled engines. These efficient engines stand out with their high power output and excellent drive. Moreover, exhaust residues no longer remain in the engine due to air cleaning of the combustion chamber. This means a reduction in CO_2 production of up to around 45%, more power and decreased fuel consumption.



BATTERY-POWERED BRUSHCUTTERS

AL-KO 36 V





SMART DIAGNOSIS

Once the new 5 Ah Bluetooth battery (art. no. 114 161) is inserted into the smart garden tool, it automatically exchanges data with the tool. The garden tool transmits relevant operating information to the battery, including current and past error codes. The smart battery then sends this data via Bluetooth to both our AL-KO inTOUCH® app and the service dashboard. This innovative system makes troubleshooting much easier for our service departments and also provides end customers with a comprehensive insight into their tool's performance and operating data.





GT 3635 L

		COMFORT pro
Working width blade / nylon line		– / 35 cm
Power		Li-ion 36 V 2.5 Ah / 4.0 Ah / 5.0 Ah / 8.0 Ah
Line type		Nylon double thread, Ø 2.0 mm
Handle		Loop handle
Carry strap		single
Line head / blade		✓ / –
Shaft tube Ø		26 mm
Approx. weight		3.15 kg
WITHOUT BATTERY OR CHARGER	**EAN no.**	400 371 806 6845
	Art. no.	**127 822**
SET INCL. 1x BATTERY 4 Ah + CHARGER 3 A	**EAN no.**	400 371 806 7767
	Art. no.	**127 826**



BC 3640 L

	PREMIUM pro
	25 cm / 41 cm
	Li-ion 36 V 2.5 Ah / 4.0 Ah / 5.0 Ah / 8.0 Ah
	Nylon double thread, Ø 2.4 mm
	Loop handle
	single
	✓ / ✓
	26 mm
	4.8 kg
EAN no.	400 371 806 6852
Art. no.	**127 823**
EAN no.	400 371 806 7774
Art. no.	**127 827**



BC 4235.2 B

	COMFORT pro
	25.5 cm / 36 cm
	Li-ion 36 V 2.5 Ah / 4.0 Ah / 5.0 Ah / 8.0 Ah
	Nylon double thread, Ø 2.0 mm
	Bike handle
	single
	✓ / ✓
	24 mm
	5.3 kg
EAN no.	400 371 806 3097
Art. no.	**127 644**
EAN no.	400 371 806 6203
Art. no.	**127 796**



BC 3640 B

	PREMIUM pro
	25 cm / 41 cm
	Li-ion 36 V 2.5 Ah / 4.0 Ah / 5.0 Ah / 8.0 Ah
	Nylon double thread, Ø 2.4 mm
	Bike handle
	double
	✓ / ✓
	26 mm
	5.2 kg
EAN no.	400 371 806 6869
Art. no.	**127 824**
EAN no.	400 371 806 7781
Art. no.	**127 828**

PETROL BRUSHCUTTERS & TRIMMERS





	126 L	126 B	130 L	130 B	140 L	140 B	151 B
	EASY *pro*	EASY *pro*	COMFORT *pro*	COMFORT *pro*	PREMIUM *pro*	PREMIUM *pro*	PREMIUM *pro*
Blade / line cutting width	25 cm / 41 cm	25 cm / 41 cm	25 cm / 41 cm	25 cm / 41 cm	25 cm / 41 cm	25 cm / 41 cm	25 cm / 41 cm
Engine ccm / kW / HP	2-stroke 26 / 0.75 / 1.02	2-stroke 26 / 0.75 / 1.02	2-stroke, air supply 30 ccm / 0.9 - 1.22 kW	2-stroke, air supply 30 ccm / 0.9 - 1.22 kW	2-stroke, air supply 40.2 / 1.5 / 2.04	2-stroke, air supply 40.2 / 1.5 / 2.04	2-stroke, air supply 50.8 / 1.9 / 2.6
Line type	Nylon double line, Ø 2.4 mm	Nylon double line, Ø 2.4 mm	Nylon double line, Ø 2.4 mm	Nylon double line, Ø 2.4 mm	Nylon double line, Ø 2.4 mm	Nylon double line, Ø 2.4 mm	Nylon double line, Ø 2.4 mm
Handle	Loop handle	Bike handle	Loop handle	Bike handle	Loop handle	Bike handle	Bike handle
Double carry strap Basic / Semi-Pro / Pro	✓ / – / –	✓ / – / –	– / ✓ / –	– / ✓ / –	– / – / ✓	– / – / ✓	– / – / ✓
Easy Start System Pro	✓	✓	✓	✓	–	–	–
Fast & Easy line head / blade	✓ / ✓	✓ / ✓	✓ / ✓	✓ / ✓	✓ / ✓	✓ / ✓	✓ / ✓
Fuel tank volume	0.55 l	0.55 l	0.55 l	0.55 l	0.7 l	0.7 l	0.7 l
Shaft tube Ø	26 mm	26 mm	26 mm	26 mm	26 mm	26 mm	28 mm
Primer	✓	✓	✓	✓	✓	✓	✓
Ready-to-start switch	✓	✓	✓	✓	✓	✓	✓
Anti-vibration / Anti-vibration system Pro	✓ / –	✓ / –	✓ / –	✓ / –	✓ / –	✓ / –	– / ✓
Maintenance-free bevel-gear drive	✓	✓	✓	✓	✓	✓	✓
Approx. weight	4.9 kg	5.2 kg	5.5 kg	6.0 kg	7.2 kg	7.7 kg	8.5 kg
EAN no.	400 371 806 1635	400 371 806 1642	400 371 806 1659	400 371 806 1666	400 371 806 7804	400 371 806 6968	400 371 806 6975
Art. no.	**127 610**	**127 611**	**127 612**	**127 613**	**127 845**	**127 829**	**127 830**

Additional brushcutter with split shaft (Art. no. 127 634) on page 92

ACCESSORIES



Replacement line head for GT 3635 L battery trimmer
Ø 2.0 mm. Outer diameter: 102 mm
Thread size: M 10 x 1.25 l
EAN no. 400 371 806 7835
Art. no. 127 849



Fast & Easy line head for cordless brushcutters BC 4235.2 B, BC 3640 L and BC 3640 B
Simple threading and winding of the cutting line without opening the line head. Ø 2.0 mm.
Outer diameter: 120 mm
Thread size: M 10 x 1.25 l
EAN no. 400 371 806 3523
Art. no. 127 668



Fast & Easy line head Semi-Pro for 126 L, 126 B, 130 L, 130 B
Simple threading and winding of the cutting line without opening the line head Ø 2.4 mm
Outer diameter: 115 mm
Thread size: M 10 x 1.25 l
EAN no. 400 371 806 1994
Art. no. 127 619



Fast & Easy line head Pro for 140 L, 140 B, 151 B
Simple threading and winding of the cutting line without opening the line head Ø 2.4 mm
Outer diameter: 130 mm
Thread size: M 10 x 1.25 l
EAN no. 400 371 806 2007
Art. no. 127 620



Grass blade for all petrol brushcutters
250 x 25.4 mm (3-tooth)
EAN no. 400 371 804 4171
Art. no. 112 906



Basic carry strap for all brushcutters
EAN no. 400 371 805 2824
Art. no. 127 250



Basic double carry strap for all brushcutters
EAN no. 400 371 805 2831
Art. no. 127 251



Semi-pro double carry strap for all brushcutters
EAN no. 400 371 804 4188
Art. no. 112 907



Double carry strap Pro for all brushcutters
EAN no. 400 371 805 2848
Art. no. 127 252



Wall mounting system
for GT 3635 L, BC 3640 L.
EAN no. 400 371 806 7316
Art. no. 114 184



Saw blade
for brushcutters 140 L, 140 B and 151 B. 200 x 25.4 mm.
EAN no. 4003718066371
Art. no. 127 812



Metal protection device for saw blade 127 812
for brushcutters 140 L, 140 B and 151 B.
EAN no. 400 371 806 6982
Art. no. 127 831



BIODEGRADABLE TRIMMER LINE
Ø 1.6 mm / 15 m
EAN no. 400 371 806 7293
Art. no. 114 182
Ø 2.0 mm / 15 m
EAN no. 400 371 806 7309
Art. no. 114 183

HIGH-QUALITY REPLACEMENT LINE

Cross section	Ø / length	Art. no.	EAN no.
ROUND	1.3 mm / 15 m	113 481	400 371 805 6693
	1.6 mm / 15 m	113 483	400 371 805 6716
	2.0 mm / 15 m	113 485	400 371 805 6730
	2.4 mm / 15 m	113 487	400 371 805 6754
	2.4 mm / 44 m	113 488	400 371 805 6761
	2.7 mm / 15 m	113 490	400 371 805 6785
	3.0 mm / 56 m	113 492	400 371 805 6808
	3.3 mm / 15 m	113 494	400 371 805 6822
SQUARE	2.4 mm / 15 m	113 496	400 371 805 6846
	2.4 mm / 69 m	113 497	400 371 805 6853
	2.7 mm / 15 m	113 498	400 371 805 6860
	3.0 mm / 15 m	113 500	400 371 805 6884
	3.3 mm / 15 m	113 502	400 371 805 6907
	4.0 mm / 25 m	113 504	400 371 805 6921
SAWTOOTH	3.0 mm / 37 m	113 505	400 371 805 6938
	3.5 mm / 27 m	113 506	400 371 805 6945



BATTERY-POWERED MULTI-TOOL

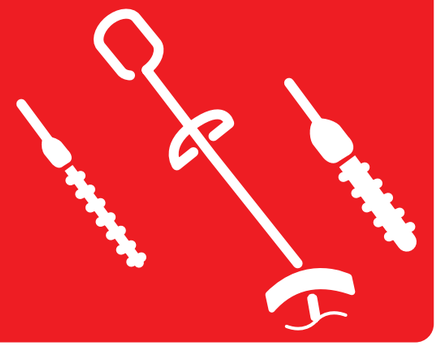





MT 42.2

PREMIUM *pro*

Length	95 cm
Weight	2.2 kg
EAN no.	400 371 806 3011
Art. no.	**127 633**

SET INCL. BATTERY AND CHARGER + 2 ATTACHMENTS

Included in delivery	1x battery 36 V (4 Ah) 1x charger (3 A) 1x CSA 4220.2, 1x HTA 4245.2
EAN no.	400 371 806 6241
Art. no.	**127 797**



Extension shaft for MT 42.2

Length	80 cm
Weight	0.5 kg
EAN no.	400 371 806 3127
Art. no.	**127 647**

Extension shaft 80 cm
Made from sturdy aluminium
For HTA 4245.2 and CSA 4220.2



Hedge trimmer attachment HTA 4245.2 for MT 42.2

Bar length	45 cm
Power	Brushless
Stroke rate in rpm	1,200 (eco) / 1,500 (power)
Pivoting angle	270° / 9 positions
Tooth gap	up to 28 mm
Attachment length	135 cm
Approx. weight	2.3 kg
EAN no.	400 371 806 3110
Art. no.	**127 646**

Hedge trimmer attachment with swivelling cutting head
Quick adjustment of the angle in 15° increments with just the press of a button, as well as a working radius of 270° thanks to nine different angle positions including storage position.



Pruner attachment CSA 4220.2 for MT 42.2

Bar length	25 cm / 10"
Power	Brushless
Chain speed	12 m/s / 14 m/s
Chain lubrication	Automatic
Pivoting angle	4-stage
Chain	3/8" spec.
Chain oil volume	120 ml
Attachment length	110 cm
Approx. weight	2.1 kg
EAN no.	400 371 806 3080
Art. no.	**127 643**

Pruner attachment with swivelling cutting head
High quality bar and 3/8" special chain from Oregon.

ACCESSORIES



FAST & EASY LINE HEAD FOR MULTI-TOOL BRUSHCUTTER ATTACHMENT BCA 4235.2
Simple threading and winding of the cutting line without opening the line head Ø 2.0 mm.
Thread size: M 10 x 1.25
EAN no.400 371 806 3103
Art. no. 127 645



10" OREGON CHAIN BAR 104MLEA041
EAN no. 400 371 806 3592
Art. no. 127 674



3/8" OREGON CHAIN 90PX040X
EAN no. 400 371 806 0232
Art. no. 127 549

AL-KO 36 V

All **AL-KO 36 V** garden tools can be used with the batteries and chargers listed on **page 6**. Other garden tools in this battery range can be found on **pages 7–11**.

Brushcutter attachment BCA 4235.2 for MT 42.2

Working width ø blade / line	25.5 cm / 36 cm
Engine	Brushless
Area coverage*	380 m²
Lawn edge length	1,800 m
Blade/line thickness	2 mm / Ø 2.0
Included in delivery	Line head, blade
FAST & EASY line head	✔
Approx. weight	1.9 kg
EAN no.	400 371 806 3073
Art. no.	**127 642**

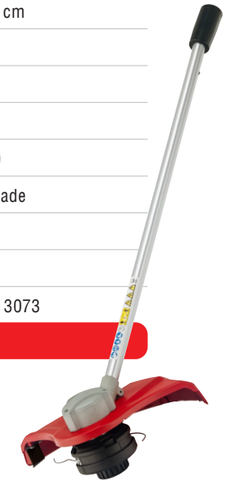

Brushcutter attachment
Precision trimming for green spaces.
Optimum precision cutting.

*The area coverage is calculated based on 8 Ah batteries.



PETROL MULTI-TOOL



MT 130

COMFORT *pro*



Engine	30 ccm / 0.9 kW / 1.22 HP
Basic tool length (without brushcutter attachment)	102 cm
Working width blade / nylon line	25 cm / 41 cm
Handle	Loop handle
Double carry strap Basic / Semi-pro / Pro	– / ✓ / –
Line head / blade / mulching blade	✓ / ✓ / ✓
Fuel tank volume	0.55 l
Shaft tube	26 mm
Primer	✓
Easy-Start system Pro / Anti-vibration	✓ / ✓
Maintenance-free bevel-gear drive	✓
Included in delivery	Semi-professional blade and Fast & Easy line head, shredder blade double carry strap
Approx. weight	4.7 kg
EAN no.	400 371 806 3028
Art. no.	**127 634**

Basic tool
Low-emission air cooled engine.
Easy Start System – An easy way to start the engine with little effort.
Fast & Easy brushcutter head
Simple threading and winding of the cutting line without opening the head.



Incl. Semi-professional blade and Fast & Easy line head, shredder blade and double carry strap



Extension shaft MTA 130 MT

EAN no.	400 371 806 3059
Art. no.	**127 637**

Extension shaft 100 cm
Additional height for pruning trees and hedges, split shaft made of robust cast aluminium



Hedge trimmer attachment HTA 130 MT

Bar length	60 cm
Pivoting angle	180° / 11-step
Tooth gap	25 mm
Attachment length	156 cm
Approx. weight	2.8 kg
EAN no.	400 371 806 3042
Art. no.	**127 636**

Hedge trimmer attachment
60 cm long, counter-acting blade. Eleven different angles with easy quick adjustment of the cutting head offer a working radius of approx. 180°



Pruner attachment CSA 130 MT

Bar length	25 cm
Pivoting angle	93° / 7-step
Chain lubrication	Automatic
Attachment length	111.5 cm
Approx. weight	2 kg
EAN no.	400 371 806 3035
Art. no.	**127 635**

Pruner attachment
Seven different angles with simple quick adjustment of the cutting head offer a working radius of approx. 93°
10" Oregon chain.

ACCESSORIES FOR MT 130 BRUSHCUTTER



FAST & EASY SEMI-PRO LINE HEAD
Ø 2.4 mm, thread size: M 10 x 1.25 l
EAN no. 400 371 806 1994
Art. no. 127 619



FAST & EASY PRO LINE HEAD
Ø 2.4 mm, thread size: M 10 x 1.25 l
EAN no. 400 371 806 2007
Art. no. 127 620



GRASS CUTTING BLADE
250 x 25.4 mm (3-tooth)
EAN no. 400 371 804 4171
Art. no. 112 906



SHREDDER BLADE
300 x 25.4 mm (2-tooth)
EAN no. 400 371 806 3066
Art. no. 127 641



DOUBLE CARRY STRAP SEMI-PRO
EAN no. 400 371 804 4188
Art. no. 112 907

ACCESSORIES FOR CSA 130 MT



10" OREGON CHAIN BAR 100SDEA318
EAN no. 400 371 806 3639
Art. no. 127 677



10" OREGON CHAIN 91VXL40X
EAN no. 400 371 806 3646
Art. no. 127 678

SCYTHE MOWER

MANOEUVRABILITY FOR A NATURAL GARDEN





OPTIMAL HANDLING – EVEN ON ROUGH TERRAIN

The **BM 5001 R IV** scythe mower allows you to efficiently maintain large natural gardens, orchards, fields and pastures. In doing so, you are able to cut your grass in an ecological way, leaving it as natural as possible. To ensure comfortable use, the scythe mower is fitted with wide tyres, a powerful wheel drive with forward and reverse gears, a blade drive which can be engaged and disengaged and special hardened blades for a high level of durability. The ergonomic and vibration-dampened handlebar, which is effortless to use, guarantees safe mowing and can be adjusted to the operators height. The powerful 139 ccm Loncin engine ensures you get the job done easily and provides reliable power even in long undergrowth and thick weeds on terrain or slopes. This is where the machine shows its great manoeuvrability, which allows it to be used optimally at almost any meadow edge or field boundary.



BM 5001-R IV

PREMIUM*pro*

Cutting width	102 cm
Power	5000 m²
Engine	LONCIN 139 OHV LC1P65FE
Power	139 ccm / 2.7 kW / 3,100 rpm
Forward / reverse gear	✓ / ✓
Blade drive can be disengaged	✓
Wide outer wheel	56 cm
Tyre size (")	13 x 6.0 - 6 wheels with foam filling
Weight	58 kg

SET incl. 102 cm cutter bar	**EAN no.**	400 371 806 6111
	Art. no.	**127 767**



COMBI-TOOL

ONE TOOL, MANY POSSIBILITIES





THE ALL-ROUNDER

The **Combi 5002-R II** is a very powerful basic unit with the option to be equipped for four applications. Use the optional attachments to convert the basic unit for the desired use in next to no time. The 87 cm wide cutter bar converts the unit into a scythe mower for areas of up to 2000 m². The mower attachment is used to neatly mow meadows, while the tiller comes into its own for cultivating and breaking up soil. The ridge plough is the ideal tool for preparing the ground for potatoes and cultivating fruit. The drive to the attachments can be switched on and off separately. The high engine power, the switchable wheel drive with forward and reverse gears and the large, foam-filled, all-terrain tyres guarantee easy and safe driving of the machine even on rough terrain, on uneven meadows and on slopes that are difficult to access. The height-adjustable and pivoting handlebar, which can be adapted to any height, is perfectly easy to use and ensures simple manoeuvring even in narrow, winding yards, on meadows and field boundaries.



Combi 5002-R II

COMFORT *pro*

Engine	LONCIN 196 OHV LC1P70F-3
Power	196 ccm / 3.8 kW / 3,200 rpm
Forward / reverse gear	✓ / ✓
Speed (FG / RG)	2.2 km/h / 1.1 km/h
Transmission	Oil-bath worm gear, V-belt drive
Tyre size (")	13 x 5.0 - 6 wheels with foam filling
Handlebar	Height-adjustable, 180° pivot
Weight	45 kg
EAN no.	400 371 806 5855
Art. no.	**127 766**

ATTACHMENT PARTS



FRONT MOWER FSM 530 I

Working width 530 mm, cutting height adjustment 5-8-10.5 cm, deep-drawn mowing deck
EAN no. 400 371 806 5862
Art. no. 127 768



CB 870 CUTTERBAR

Working width 870 mm
EAN no. 400 371 802 0038
Art. no. 110 494



CF 500 TILLER

Working width 500 mm
EAN no. 400 371 802 0045
Art. no. 110 495



RIDGE PLOUGH

EAN no. 400 371 802 4661
Art. no. 110 742



CULTIVATOR

PLOUGHS THROUGH ALL SOIL TYPES









7505 VR

COMFORT *pro*

Engine	Honda GP 160
Power	163 ccm / 3.6 kW / 3,200 rpm
Forward / reverse gear	✓ / ✓
Tilling width	50 / 75 cm
Cultivator blades	4 / 6 cultivator star-type blades
Weight	51 kg
EAN no.	400 371 805 5023
Art. no.	**127 321**

PLOUGHS EFFORTLESSLY THROUGH ANY SOIL

Our **powered cultivator 7505 VR** is ideal for large areas and heavy soils. With a working depth of up to 15 cm, it ploughs effortlessly through any soil. The powerful engine with capacity reserves is the ideal choice for a working width of up to 75 cm and is an indispensable machine for every kitchen-gardener. The ergonomic handlebar makes accessing all the controls very easy.

The handlebar can also be perfectly adjusted to suit the operator's height. Thanks to the laterally adjustable handlebar, you do not even need to tread on the soil that has already been cultivated. The protective discs on each side let you work with precision without damaging any plants. The cultivator can be folded from its working position without any tools. It is equipped with a front wheel to make transporting it a breeze.

ATTACHMENT PARTS



RIDGE PLOUGH
for cultivator 7505 VR
EAN no. 400 371 805 5313
Art. no. 127 334

BATTERY LEAF BLOWERS

PERFECT FOR STORMY DAYS







SAY GOODBYE TO AUTUMN LEAVES

The **LB 4250 cordless leaf blower** with a powerful lithium-ion battery makes gardening a real pleasure, with minimal exertion and all without any power cables. The highly manoeuvrable tool allows you to work in a flexible manner without need for fuel, and with zero emissions. The 36 V cordless leaf blower is a powerful axial leaf blower with a volume flow rate of 870 m³/h. The brushless motor features a power mode and is also suitable for wet leaves.

Our new innovative all-in-one **leaf blower and vacuum LBV 3690** can blow leaves, vacuum leaves or do both in combination – the individual functions can be switched over with no need for tools. Top performance, elegant design, easy to manoeuvre, as well as simple, intuitive operation with infinitely variable speed adjustment are what makes our combined model of the leaf blower and vacuum stand out from the competition. The control panel integrated in the handle continuously updates you about the operating status of the machine.

		LB 4250	LBV 3690
		PREMIUM *pro*	PREMIUM *pro*
Power		Li-ion 36 V 2.5 Ah / 4.0 Ah / 5.0 Ah / 8.0 Ah	Li-ion 36 V 2.5 Ah / 4.0 Ah / 5.0 Ah / 8.0 Ah
Air speed		250 km/h	260 km/h
Leaf blowing		✓	✓
Leaf vacuuming		–	✓
Fabric collector		–	45 l
Material reduction ratio		–	10:1
Harness system		✓Only for use in conjunction with the BB 40 battery belt **Art. no. 127 573**	✓Option to use with the BB 40 battery belt and 36 V adapter **Art. no.127 573 / Art no. 127 579**
Weight		2.2 kg	5.8 kg
EAN no.		400 371 805 9694	400 371 806 4698
Art. no.		**127 507**	**127 735**
SET INCL. BATTERY AND CHARGER	**Included in delivery**	1x battery 36 V (4 Ah) 1x charger (3A) 1x battery belt BB 40	1x battery 36 V (4 Ah) 1x charger (3 A)
	EAN no.	400 371 806 1307	400 371 806 6197
	Art. no.	**127 591**	**127 795**



AL-KO 36 V

All **AL-KO 36 V** garden tools can be used with the batteries and chargers listed on **page 6**. The BB 40 battery belt can be found on **page 6**. Other garden tools in this battery range can be found on **pages 7–11**.

PETROL LEAF BLOWERS & VACUUMS

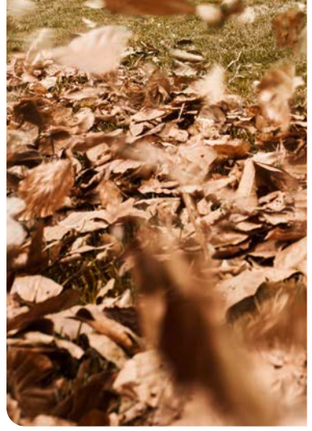



GATHER AND VACUUM LEAVES AND PLANT REMAINS

Our **leaf vacuums** offer two different functions if you want to clear leaves: leaf collection with shredding function and leaf blowing. In next to no time, you'll have cleared the leaves and other plant remains from your drive, walkway and lawn. Then, all you need to do is dispose of the leaves and plants on your compost heap or in the garden bin. The **750P** Premium pro leaf vacuum's large collection bag is fitted with a zip to make light work of emptying it. You won't want to be without the solo® by AL-KO leaf vac, especially in the autumn months and for larger gardens.

ACCESSORIES FOR 442



ALL ACCESSORIES INCLUDED.

ACCESSORIES FOR 750 P



SUCTION HOSE WITH NOZZLE
Clears the tightest corners of foliage and dirt. Length 3 m.
EAN no. 400 371 854 1731
Art. no. 120 154





	442	750 P
	COMFORT *pro*	PREMIUM *pro*
Power	27.6 ccm / 0.8 kW / 1.1 HP	140 ccm / 2.0 kW / 3,000 rpm
Air speed	260 km/h	–
Working width	–	75 cm
Leaf blowing	✓	–
Leaf vacuuming	✓	✓
Fabric collector	55 l	200 l
Suction height adjustment	–	Individual wheel, 4-stage
Material reduction ratio	Up to 10:1	–
Turbine housing	–	Steel plate
Weight	4.8 kg	36.1 kg
EAN no.	400 371 805 6075	400 371 805 1445
Art. no.	**127 380**	**127 141**



BLADE SHREDDERS

BIG ON THE SMALL THINGS







SEPARATE BRANCH FEED

	TCS DUOTEC 2500	TCS Duotec 3000
	PREMIUM pro	PREMIUM pro
Branches max. Ø	40 mm	43 mm
Power / voltage	2,500 W / 230 V	2,900 W / 400 V
Zero-voltage switch	✓	✓
Fuse	16 Amp	16 Amp
Height	135 cm	135 cm
Ball-bearing mounted wheels	✓	✓
Weight	51 kg	55 kg
EAN no.	400 371 835 3723	400 371 835 3730
Art. no.	**119 684**	**119 685**

SHRED TREE CUTTINGS AND GARDEN WASTE SWIFTLY AND SIMPLY

The **TCS Duotec 3000** garden shredder and its innovative cutting system with angled blades lets you convert tree cuttings and garden waste into finely shredded material at speed. The main feed funnel for soft material, as well as a separate chute for branches up to a diameter of 43 mm, help you to get the job done efficiently. The solid blade system with its powerful motor allows for quick and effortless work. The handles on the hopper and the ball-bearing mounted XXL wheels make it easy to transport around the garden. The side cover plates on the discharge chute ensure you are in safe hands, with a robust and reliable machine. The shredder's height of 135 cm and weight of 55 kg ensure a solid construction.

ACCESSORIES



SPARE BLADE 2 pcs.
For TCS Duotec 2500 / 3000 EAN
No. 400 371 832 3832
Art. no. 104 655

HEDGE TRIMMERS

PERFECT SHAPE TO THE LAST METRE

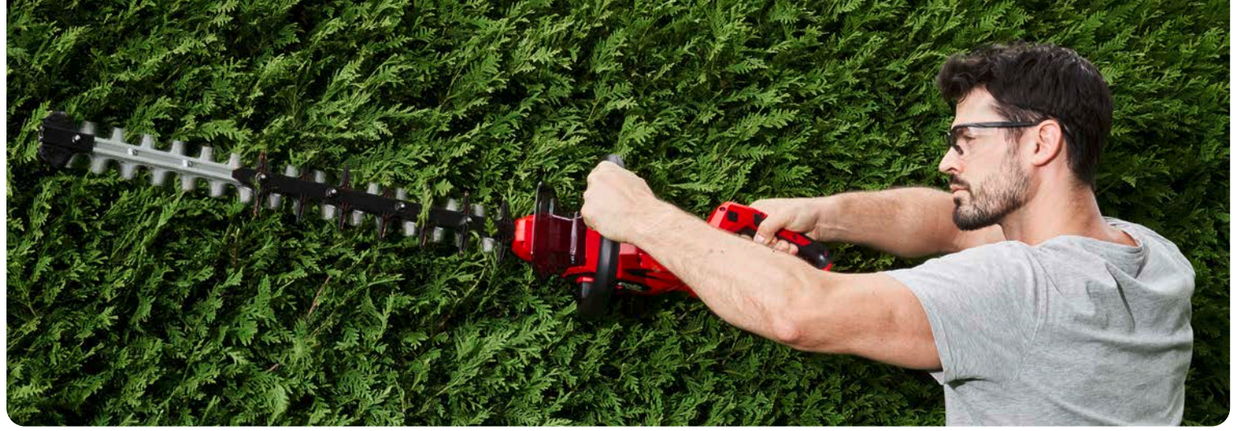



SMART COCKPIT AND HIGH PERFORMANCE

The smart cockpit of the HT3645 and HT3660 provides you with all you need to know about your hedge trimmer. The cockpit lights up as soon as the hedge trimmer is switched on or ECO mode is activated. What's more, the charge level of the battery is shown on the display when it is nearly empty.





MAGNESIUM ALLOY FOR STABILITY AND COMFORT

The underside of the HT3645 and HT3660 hedge trimmers are made of high-quality magnesium alloy, which provides exceptional stability and robustness. As such, the hedge trimmers are particularly durable and are built to last. Thanks to a maintenance screw on the underside of the hedge trimmer, you can easily lubricate the gearbox. Thanks to the optimum weight distribution and the adjustable handle with 5 settings, the hedge trimmers always fit perfectly in your hand.



ERGONOMICS A CUT ABOVE THE REST FOR PERFECT HEDGE TRIMMING

The **hedge trimmers** from solo® by AL-KO make it even easier to trim your hedge. They offer easy-cutting and functional ergonomics, so that you can conserve your energy and keep stress at bay while working. Whether petrol-powered or electric, a hedge trimmer from solo® by AL-KO is a reliable choice for your garden. The sharp, diamond-ground safety blades ensure a large tooth gap, which produces outstanding cutting. Since hedge trimming often involves working overhead, we have optimised the handles of our hedge trimmers: they are variably adjustable and, in combination with the tool's sophisticated ergonomics, make work easier than with a conventional hedge trimmer.

FATIGUE-FREE WORKING

The ergonomic controls and perfectly balanced weight allow fatigue-free working. Thanks to the battery models' cordless function in conjunction with the convenient BB 40 battery belt, you can work in a relaxed manner at your own pace.

BATTERY HEDGE TRIMMERS

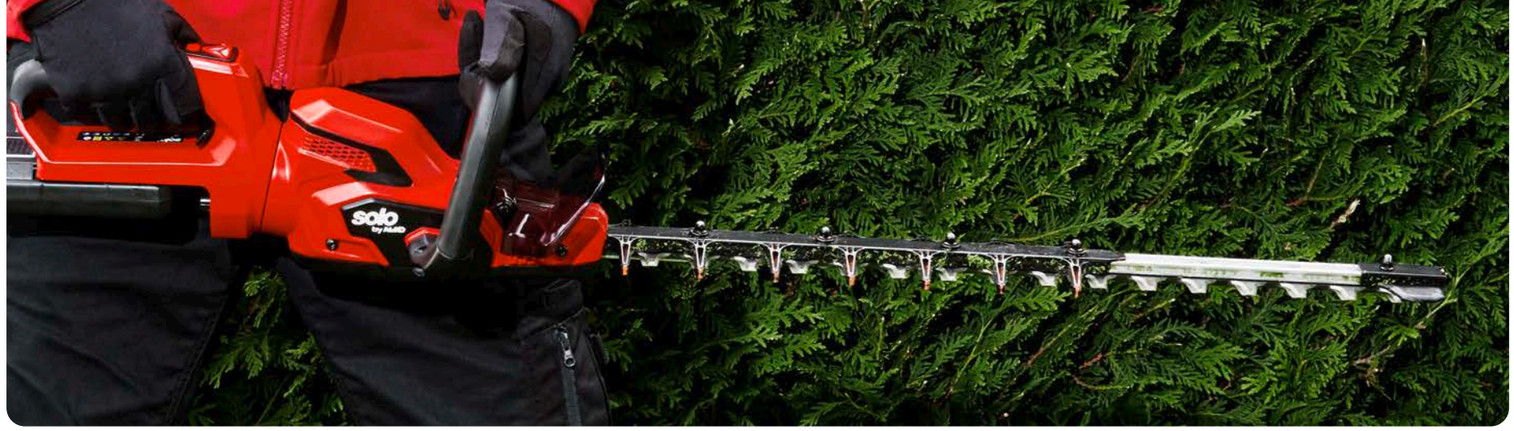



FOR EASY AND ACCURATE BATTERY-POWERED HEDGE CARE

The comfortable solo® by AL-KO BB 40 belt system perfectly supports you when working with solo® by AL-KO **HT 4245 battery hedge trimmers**. The **HT 3645** and **HT 3660** hedge trimmers can also be operated with or without the battery belt. Thanks to the battery belt, all tools become much easier and more comfortable to operate, as the weight of the battery is no longer borne by one's hands, but rather is distributed across one's body. Up to two AL-KO 36 V batteries can be fastened to the belt, supplying the appliance with power via a cable.

The batteries can be positioned anywhere you wish on the belt. Thanks to the significantly reduced weight of the garden tool, your arms will breathe a sigh of relief when gardening.



BATTERY BELT BB 40
AL-KO 36 V Belt
EAN no. 400 371 806 0713
Art. no. 127 573



		HT 4245	HT 3645	HT 3660
		COMFORT pro	PREMIUM pro	PREMIUM pro
Blade length		450 mm	450 mm	600 mm
Tooth gap		28 mm	36 mm	36 mm
Power		Li-ion 36 V 2.5 Ah / 4.0 Ah / 5.0 Ah / 8.0 Ah	Li-ion 36 V 2.5 Ah / 4.0 Ah / 5.0 Ah / 8.0 Ah	Li-ion 36 V 2.5 Ah / 4.0 Ah / 5.0 Ah / 8.0 Ah
For areas up to		2.5 Ah: 360 m² 4 Ah: 570 m² 5 Ah: 720 m² 8 Ah: 1,026 m²	2.5 Ah: 360 m² 4 Ah: 570 m² 5 Ah: 720 m² 8 Ah: 1,026 m²	2.5 Ah: 400 m² 4 Ah: 650 m² 5 Ah: 800 m² 8 Ah: 1,170 m²
Adjustable rear handle		3-stage (90°-0°-90°)	5-stage (90°-45°-0°-45°-90°)	5-stage (90°-45°-0°-45°-90°)
Cutting mechanism		Counter-rotating, double-sided cutting blade	Counter-rotating, double-sided cutting blade	Counter-rotating, double-sided cutting blade
Weight		3.5 kg	3.5 kg	3.6 kg
Clippings collector		–	Optional (Art. no. 127 753)	Optional (Art. no. 127 753)
Harness system		✔ Only for use in conjunction with the BB 40 battery belt Art. no. 127 573	✔ Optional use with battery belt BB 40 and 36 V Adapter Art. no. 127 573 + Art. no. 127 579	✔ Optional use with battery belt BB 40 and 36 V Adapter Art. no. 127 573 + Art. no. 127 579
EAN no.		400 371 805 9724	400 371 806 5053	400 371 806 4681
Art. no.		**127 510**	**127 741**	**127 734**
SET INCL. BATTERY AND CHARGER	**Included in delivery**	1x battery 36 V (4 Ah) 1x charger (3A) 1x battery belt BB 40	1x battery 36 V (4 Ah) 1x charger (3A)	1x battery 36 V (4 Ah) 1x charger (3A)
	EAN no.	400 371 806 1314	400 371 806 6135	400 371 806 6142
	Art. no.	**127 592**	**127 791**	**127 792**

AL-KO 36 V

All **AL-KO 36 V** garden tools can be used with the batteries and chargers listed on **page 6**. The BB 40 battery belt can be found on **page 6**. Other garden tools in this battery range can be found on **pages 7–11**.



CLIPPINGS COLLECTOR
EAN no. 400 371 806 5176
Art. no. 127 753

PETROL HEDGE TRIMMERS







	163-55	163-70
	COMFORT pro	PREMIUM pro
Blade length	550 mm	700 mm
Tooth gap	35 mm	35 mm
Power	22.2 ccm / 0.68 kW / 0.9 HP	22.2 ccm / 0.68 kW / 0.9 HP
Adjustable rear handle	3-stage (90°-0°-90°)	3-stage (90°-0°-90°)
Cutting mechanism	Counter-rotating, double-sided cutting blade	Counter-rotating, double-sided cutting blade
Fuel tank capacity	440 ml	440 ml
Clippings collector	Optional (Art. No. 127 753)	–
Approx. weight	5.2 kg	5.4 kg
EAN no.	400 371 805 5115	400 371 805 5122
Art. no.	127 325	127 326

POWERFUL AND A CUT ABOVE THE REST, SAFE AND EASY TO MANOEUVRE

The powerful solo® by AL-KO **163-55** and **163-70 petrol hedge trimmers** are the perfect machines when it comes to efficiently and immaculately cutting large and high hedges, shrubs and bushes. Their 440 ml fuel tank means they can cover large areas – with a high working radius and plenty of free movement. Boasting 55 cm and 70 cm long steel safety blades, there is nothing standing in the way of you having an immaculately trimmed garden in no time at all. The anti-slip rubber handles, easy to access controls and the well balanced weight of the machine all play their part in taking the strain off you. Indeed, the main handle, adjustable in three positions, provides ideal grip in any working position. The integrated anti-vibration system makes the power of the petrol hedge trimmer easy to control – for maximum protection of hands, arms and shoulders.

Safety is paramount: Firstly, a petrol hedge trimmer offers great freedom of movement without the risk of cutting through the cable. Secondly, the bolted-on cutter guard offers protection against injuries.

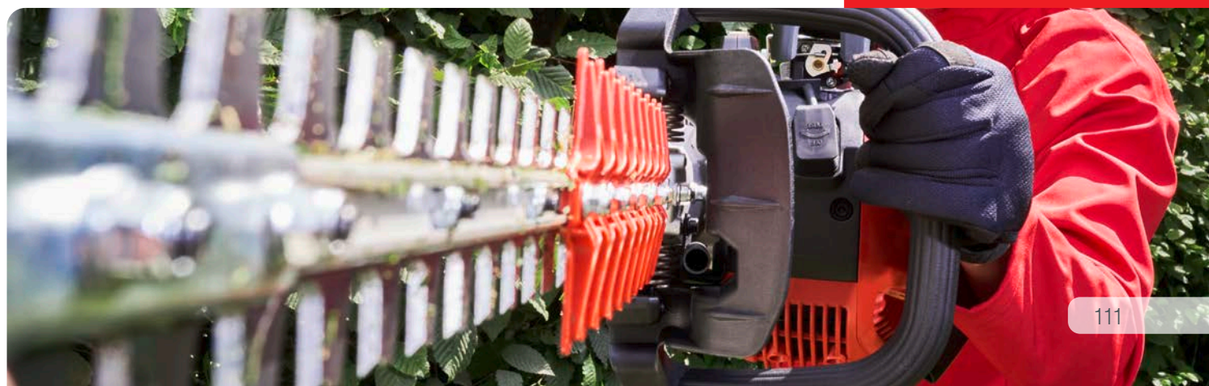

BATTERY CHAINSAWS





VERSATILE EMISSION-FREE POWER

The **battery chainsaw** excels thanks to its slender design, uncompromising equipment and cable- and emission-free lithium-ion power. It provides excellent cutting performance and long service life thanks to the Oregon bar and chain.

The tool-free chain tensioning makes for light work, not to mention the automatic chain lubrication with visual inspection window. Safe operation is ensured by the chain brake and hand protection bar with quick chain stop.

LIGHT AND EASY TO MANOEUVRE

Our comfortable solo® by AL-KO BB 40 harness system perfectly supports you when working with our solo® by AL-KO battery chainsaws. Thanks to the battery belt, operating all tools becomes much easier and more comfortable, as the weight of the battery is no longer borne by one's hands, but rather is distributed across one's body.



SMART COCKPIT AND HIGH PERFORMANCE

The smart cockpit provides you with all you need to know about your saw: A light alerts you when the chain oil tank is empty, the chain brake is engaged or ECO mode is activated.



NEXT LEVEL LED LIGHTING

With powerful LED lighting, our battery chainsaw is also the ideal choice for use in low light conditions. The light, which can be switched on separately, ensures brightness and safety in the workplace, a useful feature for forestry work.

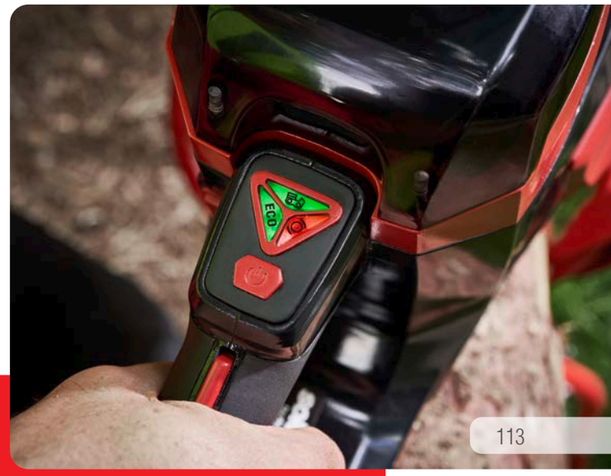

AL-KO 36 V

ADVANTAGES OF OUR PREMIUM *pro* BATTERY CHAINSAWS

- Reduced weight because the battery is not actually inside the tool
- High chain speed (up to 24 m/s in power mode)
- Tool-free tensioning of the chain and changing of the chain and bar thanks to the quick-tension chain wheel
- Four blade lengths available: 25, 30, 35 or 40 cm
- Clear oil level display
- Excellent cutting performance







	CS 4235	CS 4235	CS 4235
	COMFORT *pro*	COMFORT *pro*	COMFORT *pro*
Bar length	25 cm / 10"	30 cm / 12"	35 cm / 14"
Power	Li-ion 36 V 2.5 Ah / 4.0 Ah / 5.0 Ah / 8.0 Ah	Li-ion 36 V 2.5 Ah / 4.0 Ah / 5.0 Ah / 8.0 Ah	Li-ion 36 V 2.5 Ah / 4.0 Ah / 5.0 Ah / 8.0 Ah
Chain	3/8" spec.	3/8" spec.	3/8" spec.
Drive links / chain type	40 E / .043" / 1.1 mm	45 E / .050" / 1.3 mm	52 E / .050" / 1.3 mm
Chain speed max.	22 m/s	22 m/s	22 m/s
Chain lubrication	Automatic	Automatic	Automatic
Chain oil volume	250 ml	250 ml	250 ml
Harness system	✓ Only for use in conjunction with the BB 40 battery belt Art. no. 127 573	✓ Only for use in conjunction with the BB 40 battery belt Art. no. 127 573	✓ Only for use in conjunction with the BB 40 battery belt Art. no. 127 573
Approx. weight	3.75 kg	3.8 kg	3.85 kg
EAN no.	400 371 806 0256	400 371 806 0263	400 371 806 0270
Art. no.	**127 551**	**127 552**	**127 553**
SET INCL. BATTERY AND CHARGER – **Included in delivery**	1x battery 36 V (4 Ah) 1x charger (3A) 1x battery belt BB 40	1x battery 36 V (4 Ah) 1x charger (3A) 1x battery belt BB 40	1x battery 36 V (4 Ah) 1x charger (3A) 1x battery belt BB 40
EAN no.	400 371 806 1321	400 371 806 1338	400 371 806 1345
Art. no.	**127 593**	**127 594**	**127 595**

	CS 3635	CS 3640
	PREMIUM *pro*	PREMIUM *pro*
Bar length	35 cm / 14"	40 cm / 16"
Power	Li-ion 36 V 2.5 Ah / 4.0 Ah / 5.0 Ah / 8.0 Ah	Li-ion 36 V 2.5 Ah / 4.0 Ah / 5.0 Ah / 8.0 Ah
Chain	3/8" spec.	3/8" spec.
Drive links / chain type	52 E / .050" / 1.1 mm	56 E / .050" / 1.1 mm
Chain speed max.	24 m/s	24 m/s
Chain lubrication	Automatic / adjustable	Automatic / adjustable
Chain oil volume	280 ml	280 ml
Harness system	✓ Optional use with battery belt BB 40 and 36 V adapter Art. no. 127 573 + Art. no. 127 579	✓ Optional use with battery belt BB 40 and 36 V adapter Art. no. 127 573 + Art. no. 127 579
Approx. weight	4.1 kg	4.2 kg
EAN no.	400 371 806 4674	400 371 806 5091
Art. no.	**127 733**	**127 745**
Included in delivery	1x battery 36 V (4 Ah) 1x charger (3A)	1x battery 36 V (4 Ah) 1x charger (3A)
EAN no.	400 371 806 6159	400 371 806 6166
Art. no.	**127 793**	**127 794**

AL-KO 36 V

All **AL-KO 36 V** garden tools can be used with the batteries and chargers listed on **page 6**. The BB 40 battery belt can be found on **page 6**. Other garden tools in this battery range can be found on **pages 7–11**.

PETROL CHAINSAWS





SAWS GALORE

From compact saws for household use to high-performance saws for professional use – **the power saw range** from solo® by AL-KO has it all. All saws have the same high, uncompromising quality, safety and user-friendly features. The powerful 2-stroke engines and blade sets are perfectly matched to the respective model to always ensure powerful and high-precision cutting results.

POWERFUL, EFFICIENT AND EASY TO HANDLE

These powerful solo® by AL-KO petrol chainsaws are for demanding users. They don't just impress with their high-performance engines with a nickel-silicon-coated cylinder, the maintenance-free design as well as the chain and bar-lubrication system – they are also easy to operate and well balanced.



UNIVERSAL AND PROFESSIONAL SAWS

The universal and professional saws offer the best prerequisites for achieving optimal results thanks to the highest quality, perfect power-to-weight ratios and ideal operating comfort – even in commercial use. The professional blade sets, improved air flow, side chain tension as well as high-quality carburettor with compensator are just a few of the benefits of these devices – the same goes for the magnesium crankcase, superior ergonomics, the rapid acceleration and the effective vibration dampening. The three-part, forged crankshaft also ensures maximum wear resistance.

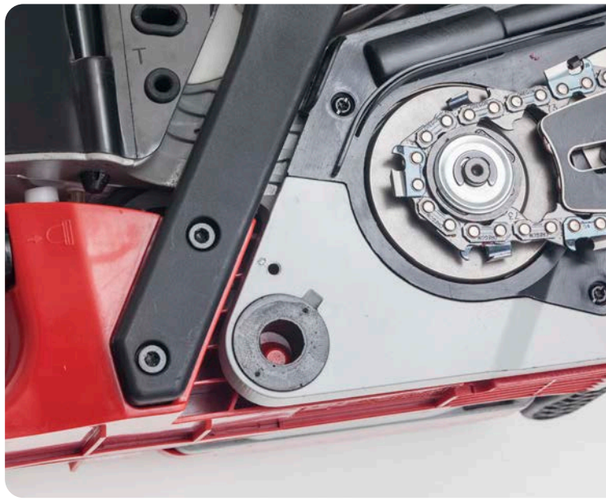

EASY START SYSTEM PRO

The “next generation” of solo® by AL-KO petrol brush cutters defines innovative technical standards right from the start: For all models, the starting process has been simplified and reduced to just a few steps. The default position of the Ready to Start switch is always in the ON position. The engine starts following a few pulls on the starter cord. Thanks to the Easy Start System Pro (all models), smooth start-up of the chainsaws is guaranteed with very little exertion.



ADVANTAGES OF **EASY** *pro* AND **COMFORT** *pro* PETROL CHAINSAWS

- High-performance engine with coated cylinder
- Maintenance-friendly design
- Chain and bar lubrication system
- Ideal for sawing firewood or occasionally felling small to medium trees
- The sturdy and lightweight design of the saws enables comfortable operation



ADVANTAGES OF THE **PREMIUM** *pro* PETROL CHAINSAWS

- Improved air intake
- Side chain tensioner
- High-quality Walbro carburettor
- Magnesium crankcase
- Effective vibration dampening
- Three-piece, forged crankshaft for maximum resistance to wear



	6240	6436	6442
	EASY *pro*	COMFORT *pro*	COMFORT *pro*
Bar length	40 cm / 16"	35 cm / 14"	40 cm / 16"
Engine	2-stroke	2-stroke	2-stroke
Power	40.1 ccm / 1.5 kW / 2.0 HP	35.2 ccm / 1.5 kW / 2.0 HP	41.9 ccm / 1.7 kW / 2.3 HP
Power-to-weight ratio	3.0 kg / kW	2.8 kg / kW	2.5 kg / kW
Chain	3/8" spec. semi-chisel	3/8" spec. semi-chisel	3/8" spec. semi-chisel
Side chain tensioner	✓	✓	✓
Anti-vibration	✓	✓	✓
Oil flow control	✓	✓	✓
Air pre-heating in winter operation	–	✓	✓
Air filter changeable without tools	✓	–	–
Tool-free fuel caps	✓	✓	✓
Decompression valve	–	–	–
Easy Start System Pro	✓	✓	✓
Primer	✓	✓	✓
Ready-to-start switch	–	✓	✓
Approx. weight	4.6 kg	4.8 kg	4.8 kg
EAN no.	400 371 805 6594	400 371 805 8208	400 371 805 8215
Art. no.	**127 392**	**127 429**	**127 430**



	6646	6651	6656
	PREMIUM *pro*	PREMIUM *pro*	PREMIUM *pro*
	38 cm / 15"	38 cm / 15"	45 cm / 18"
	2-stroke	2-stroke	2-stroke
	46.5 ccm / 2.0 kW / 2.7 HP	50.9 ccm / 2.2 kW / 3.0 HP	55.5 ccm / 2.4 kW / 3.2 HP
	2.8 kg / kW	2.5 kg / kW	2.3 kg / kW
	.325" / semi-chisel	.325" / semi-chisel	.325" / semi-chisel
	✓	✓	✓
	✓	✓	✓
	✓	✓	✓
	✓	✓	✓
	-	-	-
	✓	✓	✓
	✓	✓	✓
	✓	✓	✓
	✓	✓	✓
	✓	✓	✓
	5.6 kg	5.6 kg	5.6 kg
	400 371 805 9823	400 371 805 9830	400 371 806 0447
	127 520	**127 521**	**127 564**
BASIC TOOL WITHOUT BAR AND CHAIN			
	400 371 805 9854	400 371 805 9861	400 371 805 9878
	127 523	**127 524**	**127 525**
ALTERNATIVE BAR SETS			
	–	45 cm / 18" / .325" / semi-chisel EAN no. 400 371 806 0416 **Art. no. 127 561**	38 cm / 15" /.325" / semi-chisel EAN 400 371 805 9847 **Art. no. 127 522**
	–	–	45 cm / 18" / 3/8" / full chisel EAN 400 371 806 0423 **Art. no. 127 562**
	–	–	50 cm / 20" / 3/8" / full chisel EAN 400 371 806 0430 **Art. no. 127 563**



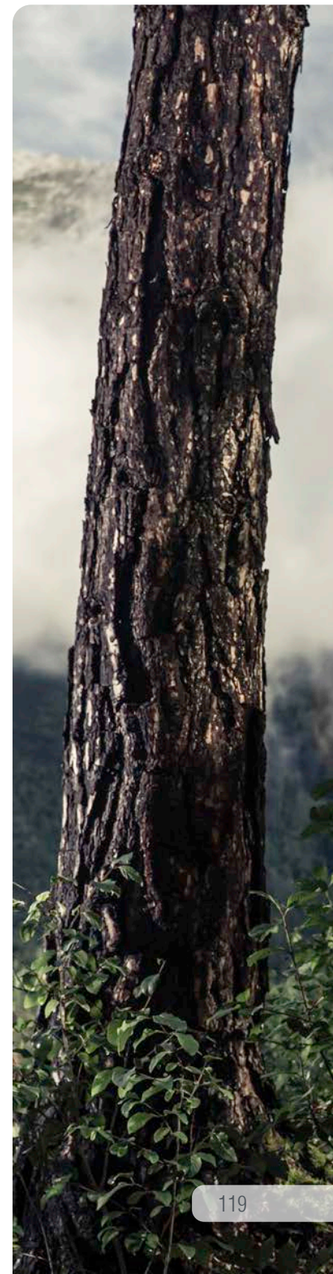

CHAINSAW ACCESSORIES



SINGLE COMPONENTS

CHAINS

SAW	BLADE LENGTH	PITCH	DRIVE LINKS / CHAIN TYPE	CHAIN TYPE	TYPE	ART. NO.	EAN NO.
621	40 cm / 16"	3/8" spec.	57 E / .050" / 1.3 mm	Semi-chisel	91PX	127 546	400 371 805 9816
CS 4235	25 cm / 10"	3/8" spec.	40 E / .043" / 1.1 mm	Semi-chisel	90PX	127 549	400 371 806 0232
	30 cm / 12"	3/8" spec.	45 E / .050" / 1.3 mm	Semi-chisel	91PX	127 200	400 371 805 2329
	35 cm / 14"	3/8" spec.	52 E / .050" / 1.3 mm	Semi-chisel	91PX	127 201	400 371 805 2336
CS 3635	35 cm / 14"	3/8" spec.	52 E / .050" / 1.1 mm	Semi-chisel	90PX	127 736	400 371 806 5015
	35 cm / 14"	3/8" spec.	52 E / .050" / 1.3 mm	Semi-chisel	91PX	127 201	400 371 805 2336
CS 3640	40 cm / 16"	3/8" spec.	56 E / .050" / 1.1 mm	Semi-chisel	90PX	127 750	400 371 806 5145
6240	35 cm / 14"	3/8" spec.	53 E / .050" / 1.3 mm	Semi-chisel	91PX	127 545	400 371 805 9809
	40 cm / 16"	3/8" spec.	57 E / .050" / 1.3 mm	Semi-chisel	91PX	127 546	400 371 805 9816
6436 6442	35 cm / 14"	3/8" spec.	53 E / .050" / 1.3 mm	Semi-chisel	91PX	127 545	400 371 805 9809
	40 cm / 16"	3/8" spec.	57 E / .050" / 1.3 mm	Semi-chisel	91PX	127 546	400 371 805 9816
6646	33 cm / 13"	.325	56 E / .058" / 1.5 mm	Semi-chisel	21 BP	127 202	400 371 805 2343
	38 cm / 15"	.325	64 E / .058" / 1.5 mm	Semi-chisel	21 BP	127 203	400 371 805 2350
	45 cm / 18"	.325	72 E / .058" / 1.5 mm	Semi-chisel	21 BP	127 204	400 371 805 2367
6651	33 cm / 13"	.325	56 E / .058" / 1.5 mm	Semi-chisel	21 BP	127 202	400 371 805 2343
	38 cm / 15"	.325	64 E / .058" / 1.5 mm	Semi-chisel	21 BP	127 203	400 371 805 2350
	45 cm / 18"	.325	72 E / .058" / 1.5 mm	Semi-chisel	21 BP	127 204	400 371 805 2367
	33 cm / 13"	.325	56 E / .058" / 1.5 mm	Full chisel	21 LP	127 210	400 371 805 2428
	38 cm / 15"	.325	64 E / .058" / 1.5 mm	Full chisel	21 LP	127 211	400 371 805 2435
	45 cm / 18"	.325	72 E / .058" / 1.5 mm	Full chisel	21 LP	127 212	400 371 805 2442
6656	33 cm / 13"	.325	56 E / .058" / 1.5 mm	Semi-chisel	21 BP	127 202	400 371 805 2343
	38 cm / 15"	.325	64 E / .058" / 1.5 mm	Semi-chisel	21 BP	127 203	400 371 805 2350
	45 cm / 18"	.325	72 E / .058" / 1.5 mm	Semi-chisel	21 BP	127 204	400 371 805 2367
	33 cm / 13"	.325	56 E / .058" / 1.5 mm	Full chisel	21 LP	127 210	400 371 805 2428
	38 cm / 15"	.325	64 E / .058" / 1.5 mm	Full chisel	21 LP	127 211	400 371 805 2435
	45 cm / 18"	.325	72 E / .058" / 1.5 mm	Full chisel	21 LP	127 212	400 371 805 2442
	40 cm / 16"	3/8"	60 E / .058" / 1.5 mm	Full chisel	73 LP	127 205	400 371 805 2374
	45 cm / 18"	3/8"	68 E / .058" / 1.5 mm	Full chisel	73 LP	127 206	400 371 805 2381
	50 cm / 20"	3/8"	72 E / .058" / 1.5 mm	Full chisel	73 LP	127 207	400 371 805 2398

BARS

BAR FITMENT	ART. NO.	EAN NO.
A041	127 490	400 371 805 9359
A041	127 550	400 371 806 0249
A041	127 555	400 371 806 0294
A041	127 557	400 371 806 0317
A041	127 737	400 371 806 5022
A041	127 489	400 371 805 9342
A041	127 749	400 371 806 5138
A041	127 489	400 371 805 9342
A041	127 490	400 371 805 9359
A041	127 489	400 371 805 9342
A041	127 490	400 371 805 9359
K095	127 493	400 371 805 9380
K095	127 494	400 371 805 9397
K095	127 495	400 371 805 9403
K095	127 493	400 371 805 9380
K095	127 494	400 371 805 9397
K095	127 495	400 371 805 9403
K095	127 501	400 371 805 9465
K095	127 502	400 371 805 9472
K095	127 503	400 371 805 9489
K095	127 493	400 371 805 9380
K095	127 494	400 371 805 9397
K095	127 495	400 371 805 9403
K095	127 501	400 371 805 9465
K095	127 502	400 371 805 9472
K095	127 503	400 371 805 9489
K095	127 496	400 371 805 9410
Z095	127 506	400 371 805 9519
K095	127 498	400 371 805 9434

PETROL CHAINSAW **ACCESSORIES**



2-STROKE OIL

Low-smoke, semi synthetic and self-mixing, universal two-stroke oil with "Fuel Fresh" fuel stabiliser for a longer storage time. 1,0 l
EAN no. 400 371 804 4034
Art. no. 112 896

1 litre oil bottle with dosing unit. A separate measuring cup is not necessary. The dosing unit is filled by applying pressure to the bottle body.
EAN no. 400 371 806 5633
Art. no. 114 078

ACCESSORIES FOR ALL CHAINSAWS



CHAIN OIL

Mineral chainsaw oil, anti-corrosion and high resistance to ageing, 1.0 l
EAN no. 400 371 804 4843
Art. no. 112 918



BIO CHAIN OIL

Vegetable-based high-performance saw chain oil, long-lasting anti-resin properties

1.0 l EAN no. 400 371 805 6662
Art. no. 113 480

5.0 l
EAN no. 400 371 805 7317
Art. no. 113 530



CHAIN GUARD

58 x 11 cm, universal
EAN no. 400 371 805 2312
Art. no. 127 199

SNOWBLOWERS

POWER THROUGH SNOW



PRECISION SNOW BLOWING

The discharge chute can be manually aligned, since it boasts the impressive feature being rotated up to 190 degrees. This means that the snow lands exactly where you want it to. Depending on the model, the snow is discharged up to an astonishing 15 m away.



PERFECT SNOW CLEARANCE AND EFFICIENT FORWARD DRIVE

Thorough results and efficient forward drive: The 2-stage augers on all petrol appliances thoroughly clear pavements and driveways, leaving them pristine – without any residual snow being left behind.





PERFECTLY ILLUMINATED AND CONVENIENT TO USE

The cockpits with extra-wide LED light strips perfectly illuminate your surroundings even in the most adverse weather conditions, such as heavy snowfall, first thing on a morning or late at night when light is hard to come by. The ergonomically designed control levers make adjusting the gears and the discharge height a breeze, meaning you can clear the snow with very little effort.

JUST WHAT YOU NEED, WHEN IT'S WHITE OUTSIDE

These handy **snowblowers** spell the end of tedious snow shovelling. They feature a powerful engine, which swiftly takes a lot of work off your hands with utmost efficiency. Our selection ranges from a small electric unit with a 46 cm clearing width through to a large petrol snowblower with a width of 76 cm, which in next to no time clears great quantities of snow with its powerful engine. Which machine is the right one for you is dependent on the expected snowfall and the area to be cleared. Depending on just how much snow you need to clear, we offer snowblowers with various snow clearing widths and single or 2-stage conveyor technology. Snow clearing is now straightforward and the task is completed in no time at all.

EXCELLENT TRACTION AND PERFECT MANOEUVRABILITY

Thanks to the large, coarse-tread rubber tyres on the petrol snowblowers or the efficient crawler tracks, you can overcome any challenge that stands in your way, even in the most adverse conditions. With up to 6 forward and 2 reverse gears, the speed of the wheel drive can also be easily regulated and adjusted.



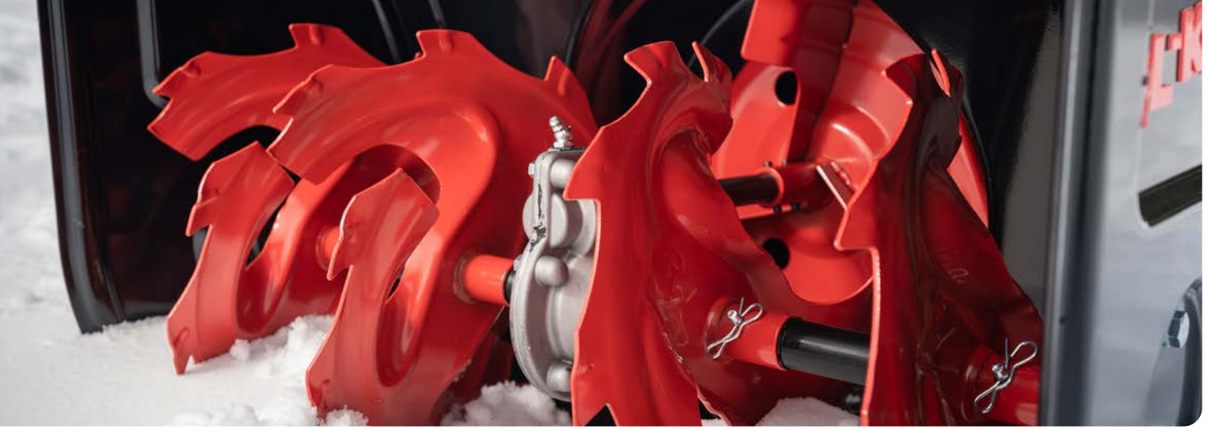

ACCESSORIES



4-STROKE SNOWBLOWER OIL
5 W 30, 0.6 l
EAN no. 400 371 804 4065
Art. no.112 899



SHEAR PIN SET of 4
With safety break point –
protects transmission from damage.
EAN no. 400 371 806 4568
Art. no. 114 030



SNOW CHAINS
set of 2

For 560 and 620 E
EAN no. 400 371 804 4096
Art. no.112 902

For 700.4 E LED
EAN no. 400 371 804 5970
Art. no. 112 985



	46 E	560 II	620 E II
	EASY *pro*	COMFORT *pro*	COMFORT *pro*
Snow clearing width	46 cm	56 cm	62 cm
For areas up to	150 m²	400 m²	500 m²
Engine	Electric	Petrol	Petrol
Power	230 V / 2.0 kW	182 ccm / 4.0 kW /	212 ccm / 4.4 kW /
Intake height	20 cm	30 cm	51 cm
Max. discharge distance	6 m	10–12 m	10–15 m
Discharge adjustment	190°, manual	190°, manual	190°, manual
Conveyor technology	1-stage, paddle	2-stage screw / centrifugal wheel	2-stage screw / centrifugal wheel
Starter system	–	Recoil start	Recoil start / electric, 230 V
Gears	–	5 forward / 2 reverse	5 forward / 2 reverse
Drive	–	Pneumatic tyres	Pneumatic tyres
Fuel tank volume	–	3 l	3 l
Heated handles	–	–	–
Headlights	–	–	✓
Weight	14.5 kg	65 kg	83 kg
EAN no.	400 371 804 5147	400 371 804 5154	400 371 804 5178
Art. no.	**112 932**	**112 933**	**112 935**



	620.4 E III LED	700.4 E LED	760.4 TE LED
	PREMIUM *pro*	PREMIUM *pro*	PREMIUM *pro*
Snow clearing width	62 cm	70 cm	76 cm
For areas up to	500 m²	800 m²	1,000 m²
Engine	Petrol	Petrol	Petrol
Power	302 ccm / 6.2 kW	375 ccm / 7.8 kW	420 ccm / 9.0 kW
Intake height	51 cm	54.5 cm	54.5 cm
Max. discharge distance	10–15 m	15 m	15 m
Discharge adjustment	190°, manual	190°, manual	190°, manual
Conveyor technology	2-stage screw / centrifugal wheel	2-stage screw / centrifugal wheel	2-stage screw / centrifugal wheel
Starter system	Recoil start / electric, 230 V	Recoil start / electric, 230 V	Recoil start / electric, 230 V
Gears	6 forward / 2 reverse	6 forward / 2 reverse	6 forward / 2 reverse
Drive	Pneumatic tyres	Pneumatic tyres	Crawler tracks
Fuel tank volume	4 l	6.5 l	6.5 l
Heated handles	✓	✓	✓
Headlights	✓	✓	✓
Weight	96 kg	118 kg	126 kg
EAN no.	400 371 806 4599	400 371 806 4605	400 371 806 4612
Art. no.	**114 036**	**114 037**	**114 038**



SMALL GARDENING ENTHUSIASTS



SPARE PARTS

CHOOSE AL-KO SPARE PARTS AND ACCESSORIES





AL-KO Gardentech stands for the highest level of quality. For example, our products stand out with their impressive durability, even when they are in frequent use. However, wear and tear or repairs may require replacement of parts. In such cases, you should always choose AL-KO genuine spare parts and accessories. Because top quality and guaranteed safety can only be expected from components which match the technical and quality characteristics of every AL-KO product down to the finest detail.
That's why, in Germany, most of the necessary genuine spare parts and accessories can be purchased at any time. This is a service which keeps downtime for your equipment at a minimum.





Moreover, using AL-KO genuine spare parts and accessories is the only way to ensure that all mutually optimised components are at full functionality and to guarantee the high quality and reliability of the AL-KO product. Indeed, the product warranty is only effective, and in case of repair will only remain valid, provided AL-KO genuine spare parts and accessories are used. Our AL-KO genuine spare parts have other benefits as well. Each improvement made to the series-produced products is conferred to the associated genuine spare parts. From a simple screw to a sophisticated control board, all genuine AL-KO and solo® by AL-KO parts are designed based on a wealth of expertise acquired through many decades of manufacturing prowess.

Our authorised service partners can also benefit from using AL-KO genuine spare parts and accessories. Components that always fit perfectly ensure short repair times and enable cost-effective repair jobs.

Safe, high-quality and always right – with AL-KO genuine spare parts and accessories, you'll always make the right choice for repairs or maintenance. That forms the basis for the lasting and reliable use of your machine.

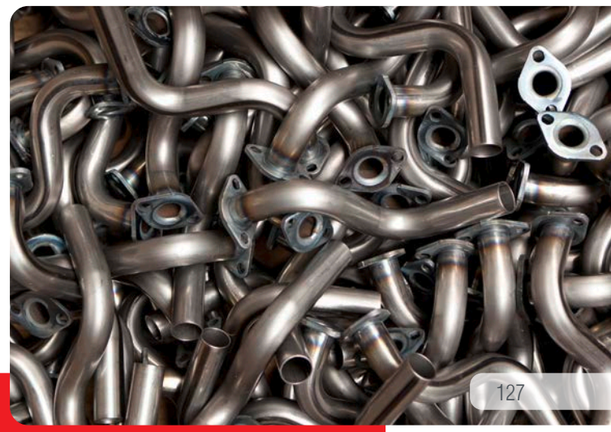

FROM 2 YEARS OLD

MINI GARDEN SET

Extensive children's garden set
Weight: 0.8 kg
EAN no. 400 371 804 3792
Art. no. 112 875



FROM 2 YEARS OLD

MINIMOWER

Children's lawnmower with grass catcher box and mowing sound, weight 1.0 kg
EAN no. 400 371 804 1309
Art. no. 112 733



TRAILER for KidTrac

Weight: 1.5 kg
EAN no. 400 371 804 3815
Art. no. 112 876

FROM 2.5 TO 5 YEARS OLD

KIDTRAC

Pedal tractor with flip-up bonnet
Weight: 6.5 kg
EAN no. 400 371 806 6081
Art. no. 114 107



TECHNICAL DATA



Page	Name	Art. no.	Sound pressure level	Sound power level	Sound power level	Tolerance factor	Vibration value	Tolerance factor
ROBOTIC LAWNMOWERS			measured LpA [dB(A)]	measured LwA [dB(A)]	guaranteed LwA [dB(A)]	Sound pressure level K_{pA} [dB(A)]	guaranteed ahw (m/s²)	K (m/s²)
16	Robolinho® 520 W	127 695	–	56.0	60.0	–	–	–
16	Robolinho® 822 W	127 696	–	56.0	60.0	–	–	–
16	Robolinho® 1121 VISION	127 835	–	O. R.*	O. R.*	–	–	–
17	Robolinho® 1423 W	127 697	–	56.0	60.0	–	–	–
17	Robolinho® 1423 RTK	127 761	–	56.0	60.0	–	–	–
17	Robolinho® 2523 RTK	127 762	–	56.0	60.0	–	–	–
17	Robolinho® 5023 RTK	127 763	–	56.0	60.0	–	–	–
LAWNMOWERS								
28	3833 Li P	127 701	80.0	88.1	93.0	3.0	2.5	1.5
28	4232 Li	127 597	69.0	89.0	90.0	2.0	6.0	2.0
28	4232 Li SP	127 661	68.4	88.4	90.0	2.0	6.0	2.0
29	4732 Li SP	127 598	69.0	89.0	91.0	2.0	6.0	2.0
29	4735 Li VS	127 798	69.0	89.0	91.0	2.0	6.0	2.0
29	4772 Li VS-W	127 599	69.0	89.0	91.0	2.0	6.0	2.0
29	5272 Li VS-W	127 600	73.5	93.5	95.0	2.0	6.0	2.0
32	4216 P-A	127 813	O. R.*	O. R.*	O. R.*	O. R.*	O. R.*	O. R.*
32	4216 SP-A	127 814	O. R.*	O. R.*	O. R.*	O. R.*	O. R.*	O. R.*
32	4716 P-A	127 815	O. R.*	O. R.*	O. R.*	O. R.*	O. R.*	O. R.*
33	4716 SP-A	127 816	O. R.*	O. R.*	O. R.*	O. R.*	O. R.*	O. R.*
33	5216 SP-A	127 817	O. R.*	O. R.*	O. R.*	O. R.*	O. R.*	O. R.*
34	4238 SP-A	127 454	74.9	94.9	96.0	2.0	6.0	2.0
34	4731 SP-A	127 602	73.9	93.9	95.0	2.0	6.0	2.0
34	4734 VSED-A	127 715	73.3	93.3	94.0	2.0	6.0	2.0
35	5231 SP-A	127 603	76.0	96.0	97.0	2.0	6.0	2.0
35	5231 SP-H	127 605	75.6	95.6	97.0	2.0	6.0	2.0
36	4754 VS-A	127 716	73.3	93.3	94.0	2.0	6.0	2.0
36	4754 VSED-A	127 717	73.3	93.3	94.0	2.0	6.0	2.0
36	5254 VS-A	127 718	76.0	96.0	97.0	2.0	6.0	2.0
37	5254 VSED-A	127 719	76.0	96.0	97.0	2.0	6.0	2.0
37	5274 VS-H	127 720	74.3	94.3	98.0	2.0	6.0	2.0
38	4852 VS ALU	127 631	75.4	95.4	96.0	2.0	6.0	2.0
38	5352 VS ALU	127 632	77.0	97.0	98.0	2.0	6.0	2.0
39	548 K	127 448	77.0	97.0	98.0	1.0	3.5	1.8
39	553 K	127 148	77.0	97.0	98.0	2.0	4.0	2.0

Page	Name	Art. no.	Sound pressure level	Sound power level	Sound power level	Tolerance factor	Vibration value	Tolerance factor
MULCH MOWERS			measured LpA [dB(A)]	measured LwA [dB(A)]	guaranteed LwA [dB(A)]	Sound pressure level K_{pA} [dB(A)]	guaranteed ahw (m/s²)	K (m/s²)
43	4736 Li VS	127 723	78.2	89.1	91.0	2.2	2.5	1.5
43	4734 SP-A	127 721	74.8	94.8	96.0	2.0	6.0	2.0
RIDE-ON LAWNMOWERS								
45	R 74.5 Li 36 V	127 776	O. R.*	O. R.*	O. R.*	O. R.*	O. R.*	O. R.*
47	R 7-63.8 A	127 486	76.0	96.0	98.0	2.0	2.0 / 3.4	2.0
47	R 7-65.8 HD	127 487	73.7	93.7	98.0	3.0	3.5 / 2.7	1.5
49	ZT 18-107.6 A	127 821	O. R.*	O. R.*	O. R.*	O. R.*	O. R.*	O. R.*
TRACTORS								
54	T 3100 Li-95.5 HDS	127 771	O. R.*	O. R.*	O. R.*	O. R.*	O. R.*	O. R.*
54	T 3100 Li-95.5 HD	127 772	O. R.*	O. R.*	O. R.*	O. R.*	O. R.*	O. R.*
54	T 6200 Li-111.5 HDS	127 773	O. R.*	O. R.*	O. R.*	O. R.*	O. R.*	O. R.*
55	T 6200 Li-105.5 HD	127 774	O. R.*	O. R.*	O. R.*	O. R.*	O. R.*	O. R.*
59	T 14-86.6 HD-A	127 818	O. R.*	O. R.*	O. R.*	O. R.*	O. R.*	O. R.*
59	T 14-92.6 HDS-A	127 819	O. R.*	O. R.*	O. R.*	O. R.*	O. R.*	O. R.*
62	T 15-93.3 HDS-A	127 685	77.1	97.1	100.0	2.0	4.0	2.0
62	T 18-111.4 HDS-A V2	127 724	78.3	98.4	100.0	2.0	4.0	2.0
62	T 15-93.3 HD-A	127 687	78.7	98.7	100.0	2.0	4.0	2.0
63	T 15-103.3 HD-A	127 688	78.3	98.3	100.0	2.0	4.0	2.0
63	T 13-93.3 HD	127 689	78.7	98.7	100.0	2.0	4.0	2.0
63	T 18-93.4 HD-A V2	127 725	78.4	98.4	100.0	2.0	4.0	2.0
63	T 18-103.4 HD-A V2	127 726	78.9	98.9	100.0	2.0	4.0	2.0
70	T 22-111.4 HDS-A V2	127 727	78.8	98.8	100.0	2.0	4.0	2.0
70	T 15-95.4 HD-A	127 705	78.5	98.5	100.0	2.0	4.0	2.0
71	T 18-95.4 HD V2	127 706	78.8	98.8	100.0	2.0	4.0	2.0
71	T 18-105.4 HD V2	127 707	79.2	99.2	100.0	2.0	4.0	2.0
72	T 22-105.4 HDD-A V2	127 708	78.7	98.7	100.0	2.0	2.0 / 4.0	2.0
72	T 22-110.4 HDH-A V2	127 709	79.4	99.4	100.0	2.0	2.0 / 4.0	2.0
73	T 22-110.6 HDDH-A V2	127 836	79.4	99.4	100.0	2.0	2.0 / 4.0	2.0
73	T 22-105.4 HD V2 SD	127 710	79.0	99.0	100.0	2.0	2.0 / 4.0	2.0
73	T 24-125.4 HD V2	127 711	84.0	104.0	105.0	2.0	2.0 / 4.0	2.0
SCARIFIERS								
79	516	127 374	80.0	77.0	79.0	0.5	3.5	0.5
79	518	127 375	80.0	92.5	93.0	0.5	3.5	0.5
80	3856 Li	127 825	O. R.*	O. R.*	O. R.*	O. R.*	O. R.*	O. R.*
81	4076 P	127 722	O. R.*	O. R.*	O. R.*	O. R.*	O. R.*	O. R.*

Subject to technical modifications. *O.R. = on request



Page	Name	Art. no.	Sound pressure level	Sound power level	Sound power level	Tolerance factor	Vibration value	Tolerance factor
BRUSH CUTTERS & TRIMMERS			measured LpA [dB(A)]	measured LwA [dB(A)]	guaranteed LwA [dB(A)]	Sound pressure level K_{pA} [dB(A)]	guaranteed ahw (m/s²)	K (m/s²)
84	GT 3635 L	127 822	O. R.*	O. R.*	O. R.*	O. R.*	O. R.*	O. R.*
85	BC 4235.2 B	127 644	84.0	93.0	96.0	3.0	4.5	1.5
85	BC 3640 L	127 823	O. R.*	O. R.*	O. R.*	O. R.*	O. R.*	O. R.*
85	BC 3640 B	127 824	O. R.*	O. R.*	O. R.*	O. R.*	O. R.*	O. R.*
86	126 L	127 610	92.9	107.1	111.0	3.0	9.1	1.5
86	126 B	127 611	92.9	107.1	111.0	3.0	10.3	1.5
86	130 L	127 612	96.6	107.8	111.0	3.0	4.4	1.5
87	130 B	127 613	96.6	107.8	111.0	3.0	6.7	1.5
87	140 L	127 845	94.3	109.1	113.0	3.0	5.8	1.5
87	140 B	127 829	94.3	109.1	113.0	3.0	10.3	1.5
87	151 B	127 830	95.8	111.7	115.0	3.0	7.8	1.5
MULTI-TOOLS								
90	MT 42.2 with CSA 4220.2	127 643	82.0	98.0	101.0	3.0	3.1	1.5
90	MT 42.2 with HTA 4245.2	127 646	86.0	94.0	97.0	3.0	2.6	1.5
91	MT 42.2 with BCA 4235.2	127 642	89.0	94.0	97.0	3.0	4.2	1.5
92	MT 130 with scythe	127 634	94.4	111.0	114.0	3.0	8.5	1.5
92	MT 130 with HTA	127 636	95.1	107.7	110.7	3.0	5.5	1.5
93	MT 130 with CSA	127 635	91.6	108.1	111.1	3.0	4.5	1.5
SCYTHE MOWER								
95	BM 5001-R IV	127 767	O. R.*	O. R.*	O. R.*	O. R.*	O. R.*	O. R.*
COMBI-TOOL								
97	Combi 5002-R II	127 766	O. R.*	O. R.*	O. R.*	O. R.*	O. R.*	O. R.*
CULTIVATOR								
99	7505 VR	127 321	83.8	95.4	96.0	0.4	7.4	0.2
LEAF BLOWERS & VACUUMS								
101	LB 4250	127 507	89.3	98.0	101.0	3.0	1.0	1.5
101	LBV 3690	127 735	O. R.*	O. R.*	O. R.*	O. R.*	O. R.*	O. R.*
103	442	127 380	93.9	106.6	109	2.4	2.0	1.5
103	750 P	127 141	86.0	96.0	98.0	2.0	6.0	2.0

Page	Name	Art. no.	Sound pressure level	Sound power level	Sound power level	Tolerance factor	Vibration value	Tolerance factor
BLADE SHREDDERS			measured LpA [dB(A)]	measured LwA [dB(A)]	guaranteed LwA [dB(A)]	Sound pressure level K_{pA} [dB(A)]	guaranteed ahw (m/s²)	K (m/s²)
105	TCS Duotec 2500	119 684	88.0	113.0	115.0	2.0	–	–
105	TCS Duotec 3000	119 685	88.0	113.0	115.0	2.0	–	–
HEDGE TRIMMERS								
109	HT 4245	127 510	80.5	93.1	95.0	2.0	1.8	1.5
109	HT 3645	127 741	82.9	90.9	94.0	3.0	2.5	1.5
109	HT 3660	127 734	82.9	90.9	94.0	3.0	2.5	1.5
111	163-55	127 325	95.0	104.3	107.0	3.0	2.1 / 2.9	1.5
111	163-70	127 326	94.2	104.3	107.0	3.0	2.1 / 2.9	1.5
CHAINSAWS								
114	CS 4235 - 25 cm	127 551	88.0	103.3	108.0	3.0	2.2 / 2.5	1.5
114	CS 4235 - 30 cm	127 552	88.0	103.3	108.0	3.0	2.2 / 2.5	1.5
114	CS 4235 - 35 cm	127 553	88.0	103.3	108.0	3.0	2.2 / 2.5	1.5
115	CS 3635 - 35 cm	127 733	93.3	101.3	105.0	3.0	3.3	1.5
115	CS 3640 - 40 cm	127 745	93.3	101.3	105.0	3.0	3.3	1.5
118	6240	127 392	99.5	110.1	113.0	3.0	8.5 / 9.0	1.5
118	6436	127 429	101.1	109.9	113.0	3.0	6.6 / 6.5	1.5
118	6442	127 430	101.5	110.9	113.0	3.0	6.9 / 7.0	1.5
119	6646	127 520	99.1	112.4	115.0	3.0	3.7 / 3.9	1.5
119	6651	127 521	100.8	112.9	116.0	3.0	4.2 / 4.4	1.5
119	6656	127 564	100.3	113.1	116.0	3.0	4.4 / 4.4	1.5
SNOWBLOWERS								
124	46 E	112 932	86.0	95.0	97.0	2.0	2.5	1.5
124	560 II	112 933	91.0	100.0	102.0	2.0	6.0	2.0
124	620 E II	112 935	91.0	102.0	103.0	3.0	4.5	1.5
125	620.4 E III LED	114 036	91.0	100.0	102.0	2.5	4.5	1.5
125	700.4 E LED	114 037	94.0	103.0	105.0	2.0	6.0	2.0
125	760.4 TE LED	114 038	94.0	104.0	106.0	2.0	6.0	2.0

Subject to technical modifications. *O.R. = on request

solo® by AL-KO



AL-KO GERÄTE GMBH
Ichenhauser Str. 14
89359 Kötz
Germany
Tel. +49 8221 203-0
gardentech@al-ko.com
www.alko-garden.de

AL-KO Gardentech
Austria GmbH
Hauptstraße 52c
8742 Obdach
Austria
Fon +43 35 78 25 15-0
office@al-ko.at
www.alko-garden.at

AL-KO KOBER Sp. z o.o.
Wysogotowo ul. Bukowska 10
62-081 Przeźmierowo
al-ko@al-ko.pl
www.alko-garden.pl

AL-KO Kober SIA
"Kalniņi B", Mārupes pag.,
Mārupes nov.,
LV-2167, Latvija
Fon +371 67627326
al-ko@al-ko.lv
www.alko-garden.com

AL-KO GARDENTECH d.o.o.
Obrtnička 3
10000 Zagreb
Hrvatska
Fon +385 1 2371 522
al-ko@al-ko.hr
www.alko-garden.hr

AL-KO Garden & Home S.r.l.
Via delle Industrie, 27
I-20883 Mezzago (MB)
Fon +39 039 93 29 311
info.garden@al-ko.it
www.alko-garden.it

Provided by your solo® by AL-KO partner:

MEMBER OF EGMF European Garden Machinery Federation

Subject to price changes and technical changes. No liability accepted for mistakes and printing errors.
Order number 2301826 (EN) As of: 10-2025

QMF® Qualifizierter Motorgeräte-Fachhandel

Registration number for disposal of waste electrical and electronic equipment:
WEEE Reg. No. DE89889102